




PROFESSIONAL
LOUDSPEAKERS



2014 GENERAL CATALOGUE

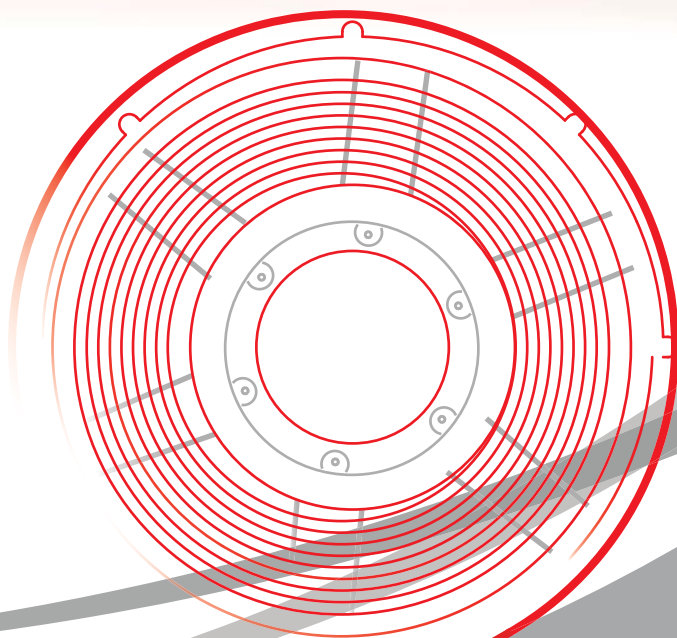



Eighteen Sound is a leading designer and manufacturer of high quality professional audio loudspeakers, with the most advanced development and manufacturing technologies in the world, and located in Reggio Emilia, Italy.

The Eighteen Sound R&D and Engineering Teams' unparalleled experience in professional transducer design is manifest in the exceptional products created at the home offices and manufacturing center.








Repeatability and fulfillment of Design in every Production unit, is our goal and our daily task. To achieve this mission, each Production Line is equipped with proprietary robotic equipment that precisely performs the most exacting tasks such as applying adhesives in exacting amounts and accurately moving and tempering parts and components, while highly skilled assembly technicians handle the essential human interface segments that define the perfect collaboration in assembly, that is the hallmark of Eighteen Sound products.

Quality Control is instituted at every stage of the manufacturing process, whether by automation and software, or close visual and tactile review. In the first stage of manufacturing, the raw materials are sourced only from providers with impeccable credential and documentation. Throughout the production process, each stage is equipped with automation and QC workstations to ensure accuracy, and validation of test criteria and design.

The fulfillment of our Customers' needs is fundamental in Eighteen Sound's philosophy. Eighteen Sound's Research & Development Department cooperates daily with top ProAudio O.E.M. customers. The recognition of their needs, as well as an open-minded approach to the customer, helps us to identify even the most demanding professional audio market requirements. We believe that this philosophy allows Eighteen Sound's products to always satisfy the most rigorous and challenging expectations in audio reproduction.





LF TRANSDUCERS - NEODYMIUM		02
LF TRANSDUCERS - FERRITE		27
HF DRIVERS - NEODYMIUM		57
HF DRIVERS - FERRITE		78
COAXIALS		87
LINE ARRAY WAVEGUIDE		95
HORNS		103



LF TRANSDUCERS - NEODYMIUM



21NLW9601

Extended LF Neodymium Transducer


98 dB SPL 1W / 1m average sensitivity
 135 mm (5.3 in) split winding four layers ISV copper coil
 3600 W program power handling
 Carbon fiber reinforced treated cellulose cone
 Triple Silicon Spider (TSS) improves excursion control and linearity even in extreme loading and SPL conditions
 Single Demodulating Ring (SDR) for lower distortion
 Low noise cooling design for very low power compression
 Suitable for bandpass and horn loaded subwoofer designs



GENERAL SPECIFICATIONS

Nominal Diameter	533mm (21 in)
Rated Impedance	8 Ohm
AES Power (1)	1800W
Program Power (2)	3600W
Peak Power	10000W
Sensitivity (3)	98 dB
Frequency Range (4)	25 - 2000 Hz
Power Compression @10dB	0,7 dB
Power Compression @3dB	1,5 dB
Power Compression @Full Power	2,2 dB
Max Recomm. Frequency	150 Hz
Recomm. Enclosure Volume	120 - 250 lt. (4.24 - 8.83 cuft)
Minimum Impedance	79 Ohm at 25°C
Max Peak To Peak Excursion	70 mm (2,75 in)


FREQUENCY RESPONSE CURVE

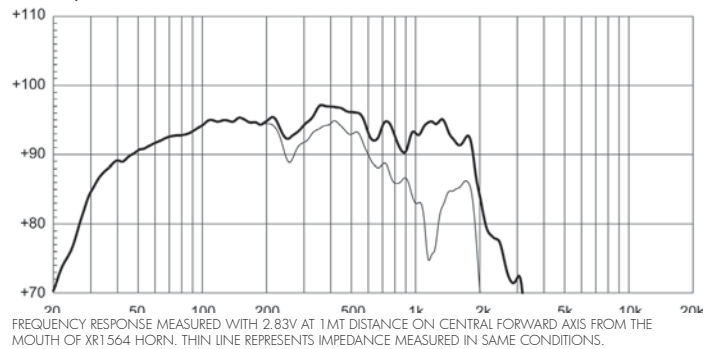

THIELE SMALL PARAMETERS (5)

Fs	37 Hz
Re	5,9 Ohm
Sd	0,1662 sq.mt. (257,6 sq.in.)
Qms	5,5
Qes	0,31
Qts	0,29
Vas	175 lt. (6.18 cuft)
Mms	408 gr. (0,90 lb)
BL	43 Tm
Linear Mathematical Xmax (6)	±14 mm (±0.55 in)
Le (1kHz)	3,10 mH
Ref. Efficiency 1W@1m (half space)	96,5 dB

FREE AIR IMPEDANCE MAGNITUDE CURVE

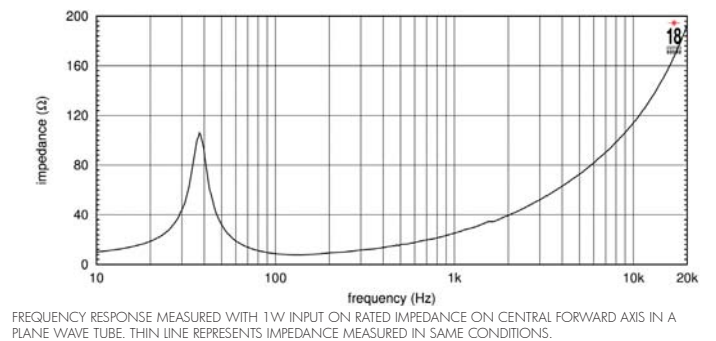

MOUNTING INFORMATION

Overall diameter	545 mm (21,46 in)
N. of mounting holes and bolt	8
Mounting holes diameter	8,5 mm (0,33 in)
Bolt circle diameter	520 mm (20,47 in)
Front mount baffle cutout Ø	492 mm (19,37 in)
Rear mount baffle cutout Ø	490 mm (19,29 in)
Total depth	250 mm (9,8 in)
Flange and gasket thickness	18 mm (0,7 in)
Net weight	14 kg (30,9 lb)
Shipping weight	15,5 kg (34,2 lb)
CardBoard Packaging dimensions	570x570x290 mm (22,4x22,4x11,4 in)

NOTES

- 1) AES power is determined according to AES2-1984 (r2003) standard
- 2) Program power rating is measured in 250 lit. enclosure tuned at 28 Hz using a 30-300 band limited pink noise test signal applied for 2 hours and with 50% duty cycle
- 3) The peak power rating represents the maximum permitted instantaneous peak power level over a maximum period of 10ms which will be withstood by the loudspeaker without damage.
- 4) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 3V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for #2 above.
- 5) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment
- 6) Linear Math. Xmax is calculated as $(Hvc-Hg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

Extended LF Neodymium Transducer


98 dB SPL 1W / 1m average sensitivity
 135 mm (5.3 in) split winding four layers ISV copper coil
 3600 W program power handling
 Carbon fiber reinforced cellulose cone
 Double Silicon Spider (DSS) for improved excursion control
 Aluminum demodulating ring (SDR) for lower distortion
 Low noise forced ventilation design for low power compression
 Weather protected cone and plates for outdoor usage
 Suitable for vented and bandpass subwoofer systems



GENERAL SPECIFICATIONS

Nominal Diameter	533 mm (21 in)
Rated Impedance	8 Ohm
AES Power (1)	1800W
Program Power (2)	3600W
Peak Power	10000W
Sensitivity (3)	98 dB
Frequency Range (4)	25 - 1500 Hz
Power Compression @10dB	0,7 dB
Power Compression @3dB	1,5 dB
Power Compression @Full Power	2,2 dB
Max Recomm. Frequency	150 Hz
Recomm. Enclosure Volume	120 - 500 lt (4,24 - 17,7 cuft)
Minimum Impedance	7,6 Ohm at 25°C
Max Peak To Peak Excursion	70 mm (2,75 in)


FREQUENCY RESPONSE CURVE

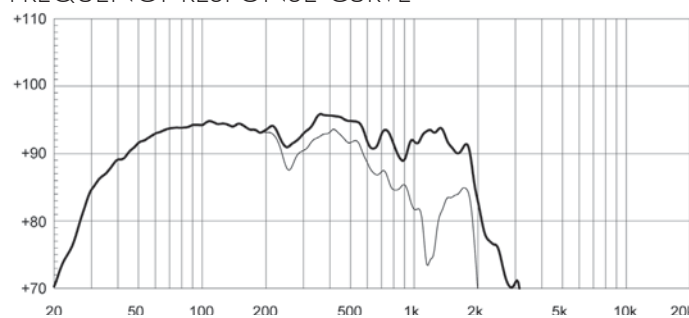

THIELE SMALL PARAMETERS (5)

Fs	32 Hz
Re	5,9 Ohm
Sd	0,1662 sq.mt. (257,6 sq.in.)
Qms	4,5
Qes	0,34
Qts	0,31
Vas	244 lt. (8,62 cuft)
Mms	390 gr. (0,86 lb)
BL	37 Tm
Linear Mathematical Xmax (6)	±14 mm (±0,55 in)
Le (1kHz)	3,1 mH
Ref. Efficiency 1W@1m (half space)	95,5 dB

FREE AIR IMPEDANCE MAGNITUDE CURVE

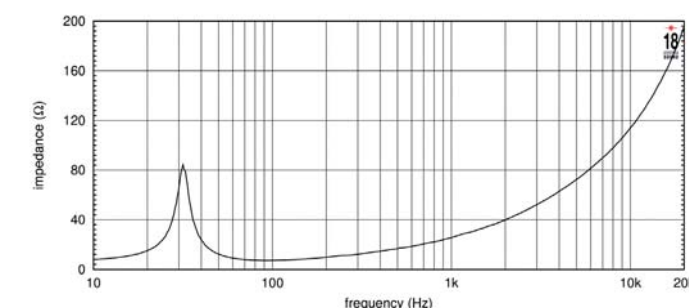

MOUNTING INFORMATION

Overall diameter	545 mm (21,46 in)
N. of mounting holes and bolt	8
Mounting holes diameter	8,5 mm (0,33 in)
Bolt circle diameter	520 mm (20,47 in)
Front mount baffle cutout Ø	492 mm (19,37 in)
Rear mount baffle cutout Ø	490 mm (19,29 in)
Total depth	250 mm (9,8 in)
Flange and gasket thickness	18 mm (0,7 in)
Net weight	14 kg (30,9 lb)
Shipping weight	15,5 kg (34,2 lb)
CardBoard Packaging dimensions	570x570x290 mm (22,4x22,4x11,4 in)

NOTES

- 1) AES power is determined according to AES2-1984 (r2003) standard
- 2) Program power rating is measured in 250 lit. enclosure tuned at 28 Hz using a 30-300 band limited pink noise test signal applied for 2 hours and with 50% duty cycle
- 3) The peak power rating represents the maximum permitted instantaneous peak power level over a maximum period of 10ms which will be withstood by the loudspeaker without damage.
- 4) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for #2 above.
- 5) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- 6) Linear Math Xmax is calculated as: $(Hvc+Hg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

18NLW9601

Extended LF Neodymium Driver


97 dB SPL 1W / 1m average sensitivity
 135 mm (5.3 in) split winding four layers ISV aluminum voice coil
 3600 W program power handling
 Carbon fiber reinforced cellulose cone
 Double Silicon Spider (DSS) for improved excursion control
 Aluminum demodulating ring (SDR) for lower distortion
 High force neodymium magnet assembly
 Weather protected cone and plates for outdoor usage
 Suitable for reflex, bandpass or horn loaded high SPL subwoofer systems



GENERAL SPECIFICATIONS

Nominal Diameter	462mm (18 in)
Rated Impedance	8 Ohm
AES Power (1)	1800W
Program Power (2)	3600W
Peak Power	10000W
Sensitivity (3)	97 dB
Frequency Range (4)	30 - 2500 Hz
Power Compression @10dB	0,7 dB
Power Compression @3dB	1,5 dB
Power Compression @Full Power	2,2 dB
Max Recomm. Frequency	300 Hz
Recomm. Enclosure Volume	110 - 350 lt. (3,88 - 12,36 cuft)
Minimum Impedance	7,6 Ohm at 25°C
Max Peak To Peak Excursion	70 mm (2,75 in)

FREQUENCY RESPONSE CURVE

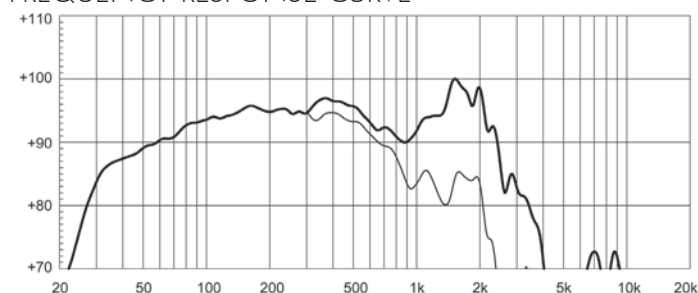


FREQUENCY RESPONSE MEASURED WITH 2.83V AT 1MT DISTANCE ON CENTRAL FORWARD AXIS FROM THE MOUTH OF XR1564 HORN. THIN LINE REPRESENTS IMPEDANCE MEASURED IN SAME CONDITIONS.

THIELE SMALL PARAMETERS (5)

Fs	32 Hz
Re	4,7 Ohm
Sd	0,113 sq.mt. (175.15 sq.in.)
Qms	5
Qes	0,28
Qts	0,27
Vas	164 lt. (5,8 cuft)
Mms	270 gr. (0,6 lb)
BL	30 Tm
Linear Mathematical Xmax (6)	±14 mm (±0,55 in)
Le (1kHz)	2,10 mH
Ref. Efficiency 1W@1m (half space)	94,6 dB

FREE AIR IMPEDANCE MAGNITUDE CURVE

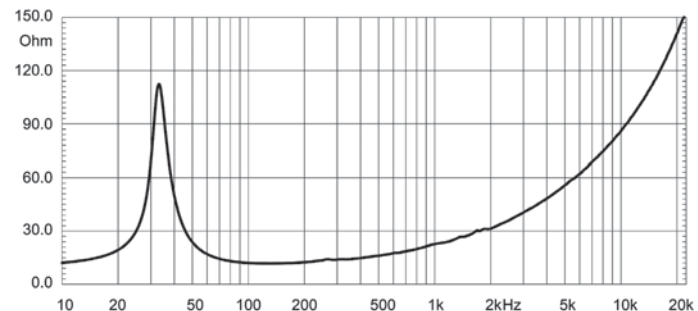

FREQUENCY RESPONSE MEASURED WITH 1W INPUT ON RATED IMPEDANCE ON CENTRAL FORWARD AXIS IN A PLANE WAVE TUBE. THIN LINE REPRESENTS IMPEDANCE MEASURED IN SAME CONDITIONS.

MOUNTING INFORMATION

Overall diameter	462 mm (18,18 in)
N. of mounting holes and bolt	8
Mounting holes diameter	8,5 mm (0,33 in)
Bolt circle diameter	440mm (17,32 in)
Front mount baffle cutout Ø	416 mm (16,38 in)
Rear mount baffle cutout Ø	422 mm (16,61 in)
Total depth	236 mm (9,29 in)
Flange and gasket thickness	26 mm (1,02 in)
Net weight	12,5 kg (27,6 lb)
Shipping weight	14 kg (30,9 lb)
CardBoard packaging dimensions	482x482x257 mm (19x19x10,1 in)

NOTES

- 1) AES power is determined according to AES2-1984 (r2003) standard
- 2) Program power rating is measured in 180 lit enclosure tuned 35Hz using a 40-400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- 3) The peak power rating represents the maximum permitted instantaneous peak power level over a maximum period of 10ms which will be withstood by the loudspeaker without damage.
- 4) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 3V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for #2 above.
- 5) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- 6) Linear Math. Xmax is calculated as $(Hvc \cdot Hg) / 2 + Hg / 4$ where Hvc is the coil depth and Hg is the gap depth.

Extended LF Neodymium Transducer


97 dB SPL 1W / 1m average sensitivity
 135 mm (5.3 in) ISV aluminum voice coil
 3600 W program power handling
 Carbon fiber reinforced cone
 Double Silicon Spider (DSS) technology
 Low noise forced ventilation design reduces power compression
 High grade neodymium magnet assembly
 Weather protected cone and plates for outdoor usage
 Suitable for vented and bandpass high SPL subwoofer systems



GENERAL SPECIFICATIONS

Nominal Diameter	462 mm (18 in)
Rated Impedance	8 Ohm
AES Power (1)	1800W
Program Power (2)	3600W
Peak Power	10000W
Sensitivity (3)	97 dB
Frequency Range (4)	32 - 2500 Hz
Power Compression @10dB	0,7 dB
Power Compression @3dB	1,2 dB
Power Compression @Full Power	2,2 dB
Max Recomm. Frequency	300 Hz
Recomm. Enclosure Volume	120 - 350 lt. (4.2 - 12.4 cuft)
Minimum Impedance	6,7 Ohm at 25°C
Max Peak To Peak Excursion	70 mm (2,75 in)

FREQUENCY RESPONSE CURVE

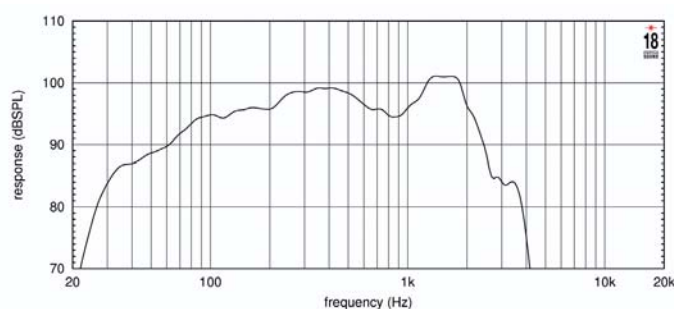


FREQUENCY RESPONSE CURVE OF 18NLW9000 MADE ON 180 lit. ENCLOSURE TUNED AT 35Hz IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER.

THIELE SMALL PARAMETERS (5)

Fs	34 Hz
Re	5,5 Ohm
Sd	0,1225 sq.mt. (190 sq.in.)
Qms	7
Qes	0,32
Qts	0,31
Vas	206 lt. (7.3 cuft)
Mms	218 gr. (0,48 lb)
BL	27 Tm
Linear Mathematical Xmax (6)	±14 mm (±0,55 in)
Le (1kHz)	1,90 mH
Ref. Efficiency 1W@1m (half space)	96,1 dB

FREE AIR IMPEDANCE MAGNITUDE CURVE

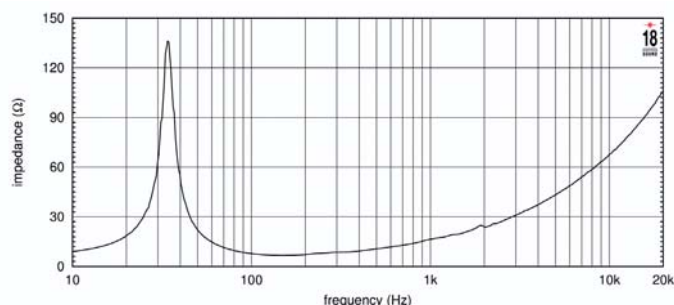

MOUNTING INFORMATION

Overall diameter	462 mm (18,18 in)
N. of mounting holes and bolt	8
Mounting holes diameter	8,5 mm (0,33 in)
Bolt circle diameter	440mm (17,32 in)
Front mount baffle cutout Ø	416 mm (16,38 in)
Rear mount baffle cutout Ø	422 mm (16,61 in)
Total depth	237,5 mm (9,3 in)
Flange and gasket thickness	26 mm (1,02 in)
Net weight	12,5 kg (27,6 lb)
Shipping weight	14 kg (30,9 lb)
CardBoard packaging dimensions	482x482x257 mm (19x19 x10,1 in)

NOTES

- 1) AES power is determined according to AES2-1984 (r2003) standard
- 2) Program power rating is measured in 180 lit enclosure tuned 35Hz using a 40-400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- 3) The peak power rating represents the maximum permitted instantaneous peak power level over a maximum period of 10ms which will be withstood by the loudspeaker without damage.
- 4) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for #2 above.
- 5) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- 6) Linear Math. Xmax is calculated as $(Hvc-Hg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

18NLW9400

Extended LF Neodymium Transducer

98 dB SPL 1W / 1m average sensitivity
 100 mm (4 in) Interleaved Sandwich Voice coil (ISV)
 2400 Watt program power handling
 Fiberglass reinforced straight ribbed cone
 Double Silicon Spider (DSS) for increased excursion control and linearity
 High grade neodymium magnet assembly
 Recommended for subwoofer usage in compact vented or bandpass enclosures
 Weather protected cone and plates for outdoor usage



GENERAL SPECIFICATIONS

Nominal Diameter	460mm (18 in)
Rated Impedance	8 Ohm
AES Power (1)	1200W
Program Power (2)	2400W
Peak Power	7000W
Sensitivity (3)	98 dB
Frequency Range (4)	30 - 2500 Hz
Power Compression @-10dB	0,7 dB
Power Compression @-3dB	1,5 dB
Power Compression @Full Power	2,2 dB
Max Recomm. Frequency	500 Hz
Recomm. Enclosure Volume	110 - 350 lt. (3.9 - 12.36 cuft)
Minimum Impedance	6,1 Ohm at 25°C
Max Peak To Peak Excursion	50 mm (2 in)


THIELE SMALL PARAMETERS (5)

Fs	33 Hz
Re	5 Ohm
Sd	0,1225 sq.mt. (189,88 sq.in.)
Qms	6,1
Qes	0,28
Qts	0,26
Vas	268 lt. (9.47 cuft)
Mms	180 gr. (0.40 lb)
BL	26 Tm
linear Mathematical Xmax (6)	±9,5 mm (±0,37 in)
le (1kHz)	1,90 mH
Ref. Efficiency 1W@1m (half space)	97,4 dB

MOUNTING INFORMATION


Overall diameter	462 mm (18,19 in)
N. of mounting holes and bolt	8
Mounting holes diameter	8,5 mm (0,33 in)
Bolt circle diameter	438-440 mm (17,24-17,32 in)
Front mount baffle cutout Ø	416 mm (16,38 in)
Rear mount baffle cutout Ø	422 mm (16,61 in)
Total depth	223,5 mm (8,8 in)
Flange and gasket thickness	26 mm (1,02 in)
Net weight	8,7 kg (19.2 lb)
Shipping weight	9,9 kg (21.8 lb)
CardBoard Packaging dimensions	482x482x257 mm (19x19x10,1 in)

FREQUENCY RESPONSE CURVE

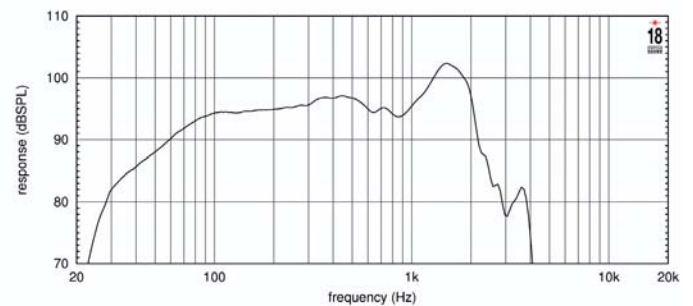

FREQUENCY RESPONSE CURVE OF 18NLW9400 MADE ON 180 lit. ENCLOSURE TUNED AT 35Hz IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE.

FREE AIR IMPEDANCE MAGNITUDE CURVE

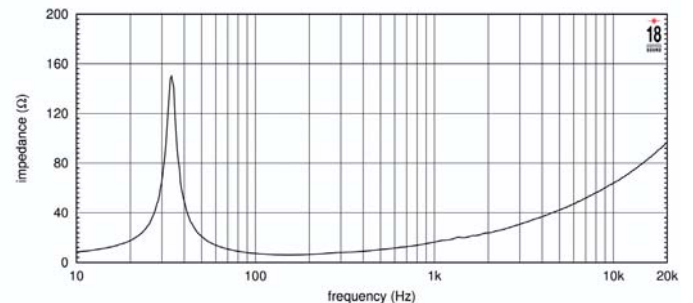

NOTES

- 1) AES power is determined according to AES2-1984 (r2003) standard
- 2) Program power rating is measured in 180lit enclosure tuned 35Hz using a 40-400Hz band limited pink noise test signal 50% duty cycle applied continuously for 2 hours.
- 3) The peak power rating represents the maximum permitted instantaneous peak power level over a maximum period of 10ms which will be withstood by the loudspeaker without damage.
- 4) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for #2 above.
- 5) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- 6) Power compression represents the loss of sensitivity for the specified power, measured from 50-500 Hz, after a 5 min pink noise preconditioning test at the specified power.
- 7) Thiele - Small parameters are measured after the test specimen has been conditioned by AES power and represent the expected long term parameters after a short period of use.
- 8) linear Math. Xmax is calculated as $(Hvc \cdot Hg) / 2 + Hg / 4$ where Hvc is the coil depth and Hg is the gap depth.

Extended Low Frequency Neo Transducer


96 dB SPL 1W / 1m average sensitivity
 100 mm (4 in) Interleaved Sandwich Voice coil (ISV)
 1000 W AES power handling
 Carbon fiber reinforced cone
 Double Silicon Spider (DSS) for improved excursion control and linearity
 Double Demodulating Rings (DDR) for lower distortion
 Rubber surround suspension system
 External neodymium magnet assembly
 Improved dissipation via onboard aluminum heatsink
 Ideal for low distortion direct radiation subwoofers



GENERAL SPECIFICATIONS

Nominal Diameter	380mm (15 in)
Rated Impedance	8 Ohm
AES Power (1)	1000W
Program Power (2)	1400W
Peak Power	7000W
Sensitivity (3)	96 dB
Frequency Range (4)	42 - 2000 Hz
Power Compression @-10dB	0,7 dB
Power Compression @-3dB	1,5 dB
Power Compression @Full Power	2,6 dB
Max Recomm. Frequency	500 Hz
Recomm. Enclosure Volume	70 - 150 lt. (2,47 - 5,3 cuft)
Max Peak To Peak Excursion	39 mm (1,5 in)
Voice Coil Diameter	100 mm (4 in)

FREQUENCY RESPONSE CURVE

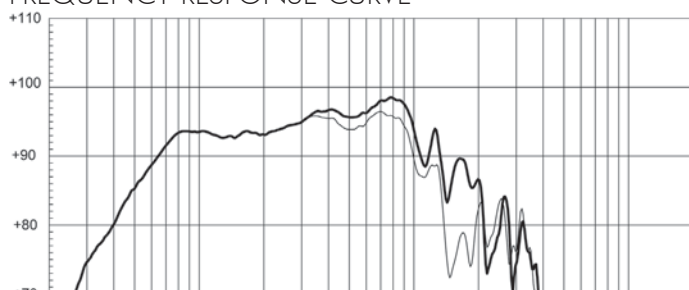


FREQUENCY RESPONSE MEASURED WITH 2.83V AT 1MT DISTANCE ON CENTRAL FORWARD AXIS FROM THE MOUTH OF XR1564 HORN. THIN LINE REPRESENTS IMPEDANCE MEASURED IN SAME CONDITIONS.

THIELE SMALL PARAMETERS (5)

Fs	35 Hz
Re	4,9 Ohm
Sd	0,091 sq.mt. (141,1 sq.in.)
Qms	6,7
Qes	0,34
Qts	0,32
Vas	163 lt. (5,8 cuft)
Mms	146 gr. (0,32 lb)
BL	21,6 Tm
Linear Mathematical Xmax (6)	±9 mm (±0,35 in)
Le (1kHz)	0,8 mH
Ref. Efficiency 1W@1m (half space)	95 dB

FREE AIR IMPEDANCE MAGNITUDE CURVE

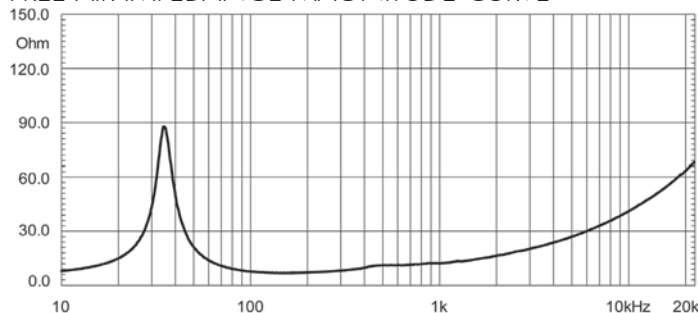

FREQUENCY RESPONSE MEASURED WITH 1W INPUT ON RATED IMPEDANCE ON CENTRAL FORWARD AXIS IN A PLANE WAVE TUBE. THIN LINE REPRESENTS IMPEDANCE MEASURED IN SAME CONDITIONS.

MOUNTING INFORMATION

Overall diameter	387 mm (15,2 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,3 in)
Bolt circle diameter	370-371 mm (14,57-14,61 in)
Front mount baffle cutout Ø	353 mm (13,9 in)
Rear mount baffle cutout Ø	357 mm (14,1 in)
Total depth	177,4 mm (6,98 in)
Flange and gasket thickness	24 mm (0,95 in)
Flange and gasket thickness	24 mm (0,95 in)
Net weight	7 kg (15,5 lb)
Shipping weight	7,6 kg (16,8 lb)

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 125 lt enclosure tuned at 50Hz using a 40-400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for #2 above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 1000 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth

15NLW9401

Extended LF Neodymium Transducer

97,5 dB SPL 1W / 1m average sensitivity
 100 mm (4 in) Interleaved Sandwich Voice coil (ISV)
 1200W AES power handling
 Fiberglass reinforced water repellent treated cone
 Double Silicon Spider (DSS) for improved excursion control and linearity
 High grade neodymium magnet assembly
 Improved heat dissipation via multiple back-plate vents
 Ideal for 60 to 130 lt subwoofer cabinets



GENERAL SPECIFICATIONS

Nominal Diameter	380mm (15 in)
Rated Impedance	8 Ohm
AES Power (1)	1200W
Program Power (2)	2400W
Peak Power	7000W
Sensitivity (3)	97,5 dB
Frequency Range (4)	37 - 2300 Hz
Power Compression @-10dB	0,7 dB
Power Compression @-3dB	1,4 dB
Power Compression @Full Power	2,0 dB
Max Recomm. Frequency	500 Hz
Recomm. Enclosure Volume	60 - 130 lt. (2,12 - 4,59 cuft)
Minimum Impedance	7,2 Ohm at 25°C
Max Peak To Peak Excursion	38 mm (1,53 in)


THIELE SMALL PARAMETERS (5)

Fs	39 Hz
Re	5,2 Ohm
Sd	0,09 sq.mt. (139,5 sq.in.)
Qms	4,13
Qes	0,28
Qts	0,26
Vas	134 lt (4,73 cuft)
Mms	140 gr (0,31 lb)
BL	25,4 Tm
Linear Mathematical Xmax (6)	±10 mm (±0,39 in)
le (1kHz)	1,9 mH
Ref. Efficiency 1W@1m (half space)	96,7 dB

MOUNTING INFORMATION


Overall diameter	393 mm (15,47 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	371 mm (14,6 in)
Front mount baffle cutout Ø	354 mm (13,93 in)
Rear mount baffle cutout Ø	360 mm (14,17 in)
Total depth	180 mm (7,13 in)
Flange and gasket thickness	12,5 mm (0,49 in)
Net weight	7,6 kg (16,78 lb)
Shipping weight	8,2 kg (18,96 lb)
CardBoard Packaging dimensions	405x405x214 mm (15,94x15,94x8,43 in)

FREQUENCY RESPONSE CURVE

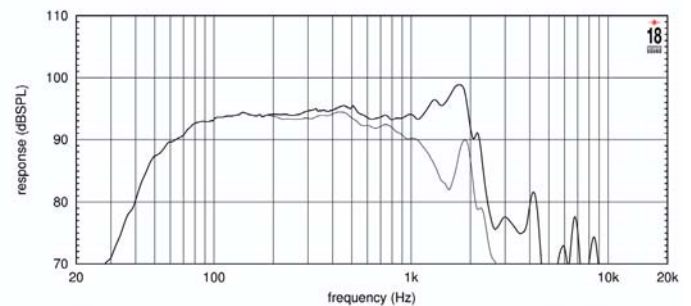

FREQUENCY RESPONSE CURVE OF 15NLW9401 MADE ON 125 LT. ENCLOSURE TUNED AT 50HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE.

FREE AIR IMPEDANCE MAGNITUDE CURVE

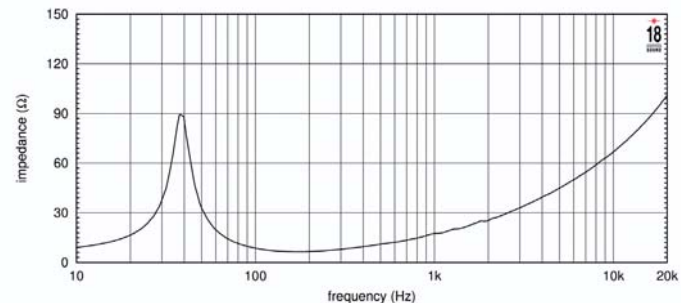

NOTES

- 1) AES power is determined according to AES2-1984 (r2003) standard
- 2) Program power rating is measured in 125 lt enclosure tuned at 50Hz using a 40-400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- 3) The peak power rating represents the maximum permitted instantaneous peak power level over a maximum period of 10ms which will be withstood by the loudspeaker without damage.
- 4) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for #2 above.
- 5) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- 6) Linear Math. Xmax is calculated as $(Hvc+Hg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

LF Neodymium Transducer

97 dB SPL 1W / 1m average sensitivity
 100 mm (4 in) Interleaved Sandwich ISV copper clad voice coil
 800W AES power handling
 Carbon fiber reinforced cone
 Double Demodulating Rings (DDR) for lower distortion
 Improved dissipation via onboard aluminum heatsink and multi-cell air diffractor

GENERAL SPECIFICATIONS

Nominal Diameter	380mm (15 in)
Rated Impedance	8 Ohm
AES Power (1)	800W
Program Power (2)	1200W
Peak Power	2400W
Sensitivity (3)	97dB
Frequency Range (4)	50 - 3000 Hz
Power Compression @-10dB	0,6 dB
Power Compression @-3dB	2,1 dB
Power Compression @Full Power	3,0 dB
Max Recomm. Frequency	1200 Hz
Recomm. Enclosure Volume	65 - 150 lt. (2,30 - 5,30 cuft)
Minimum Impedance	8 Ohm at 25°C
Max Peak To Peak Excursion	37 mm (1,46 in)

THIELE SMALL PARAMETERS (5)


Fs	39 Hz
Re	6 Ohm
Sd	0,09 sq.mt. (139,5 sq.in.)
Qms	6,7
Qes	0,274
Qts	0,26
Vas	170 lt. (6 cuft)
Mms	107 gr. (0,24 lb)
BL	24,4 Tm
Linear Mathematical Xmax (6)	±8 mm (±0,31 in)
Le (1 kHz)	0,95 mH
Ref. Efficiency 1W@1m (half space)	98 dB

MOUNTING INFORMATION

Overall diameter	387 mm (15,24 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	370-371 mm (14,55-14,6 in)
Front mount baffle cutout Ø	353 mm (13,9 in)
Rear mount baffle cutout Ø	357 mm (14,06 in)
Total depth	174 mm (6,85 in)
Flange and gasket thickness	19,5 mm (0,76 in)
Net weight	6,8 kg (15 lb)
Shipping weight	7,6 kg (16,78 lb)
CardBoard Packaging dimensions	405x405x214 mm (15,94x15,94x8,43 in)




FREQUENCY RESPONSE CURVE

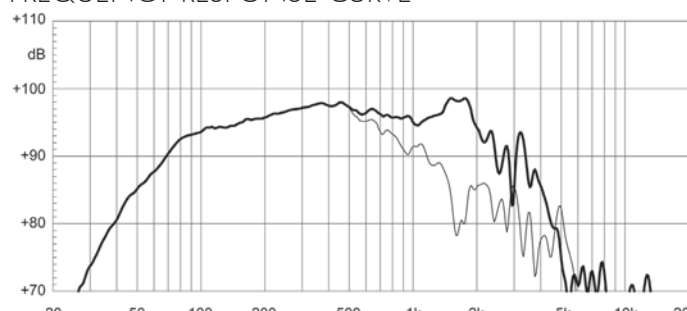

FREQUENCY RESPONSE CURVE OF 15NLW9300 MADE ON 125 LT. ENCLOSURE TUNED AT 50Hz IN FREE FIELD (4P) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE.

FREE AIR IMPEDANCE MAGNITUDE CURVE

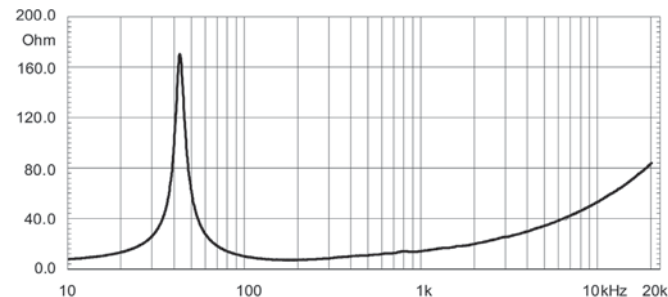

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 125 lt enclosure tuned at 50Hz using a 50-500Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 1000Hz with the test specimen mounted in the same enclosure as given for #2 above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 800 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

15ND930

Extended LF Neodymium Transducer

98 dB SPL 1W / 1m average sensitivity
 75 mm (3 in) edgewound voice coil
 500W AES power handling
 Neodymium magnet assembly
 Double Demodulating Rings (DDR) for lower distortion
 Humidity resistant cone
 Ideal for two way systems and for high loading compact subwoofer applications
 External neodymium magnet assembly
 Weather protected cone and plates for outdoor usage
 Recommended for multiway systems and studio monitoring applications



GENERAL SPECIFICATIONS

Nominal Diameter	380mm (15 in)
Rated Impedance	8 Ohm
AES Power (1)	500W
Program Power (2)	800W
Peak Power	1600W
Sensitivity (3)	98 dB
Frequency Range (4)	40 - 4100 Hz
Power Compression @-10dB	0,6 dB
Power Compression @-3dB	1,9 dB
Power Compression @Full Power	2,8 dB
Max Recomm. Frequency	1700 Hz
Recomm. Enclosure Volume	60 - 140 lt. (2,12 - 4,95 cuft)
Minimum Impedance	6,8 Ohm at 25°C
Max Peak To Peak Excursion	33 mm (1,3 in)


THIELE SMALL PARAMETERS (5)

Fs	36 Hz
Re	5,5 Ohm
Sd	0,085 sq.mt. (131,75 sq. in.)
Qms	5,3
Qes	0,23
Qts	0,22
Vas	206 lt. (7,28 cuft)
Mms	101 gr. (0,22 lb)
BL	23,8 Tm
Linear Mathematical Xmax (6)	± 7,5 mm (± 0,30 in)
Le (1kHz)	1,61 mH
Ref. Efficiency 1W@1m (half space)	98,2 dB

MOUNTING INFORMATION


Overall diameter	387 mm (15,24 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	370-371 mm (14,55-14,6 in)
Front mount baffle cutout Ø	353 mm (13,9 in)
Rear mount baffle cutout Ø	357 mm (14,06 in)
Total depth	177 mm (7 in)
Flange and gasket thickness	11,5 mm (0,45 in)
Net weight	4,1 kg (9 lb)
Shipping weight	4,8 kg (10,5 lb)
CardBoard Packaging dimensions	405 x 405 x 214 mm (15,94 x 15,94 x 8,43 in)

FREQUENCY RESPONSE CURVE

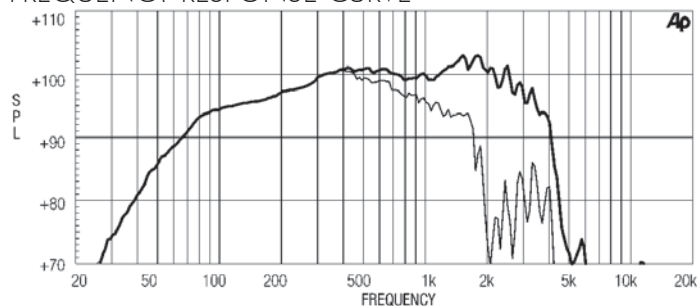

FREQUENCY RESPONSE CURVE OF 15ND930 MADE ON 125 lt. ENCLOSURE TUNED 50Hz IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

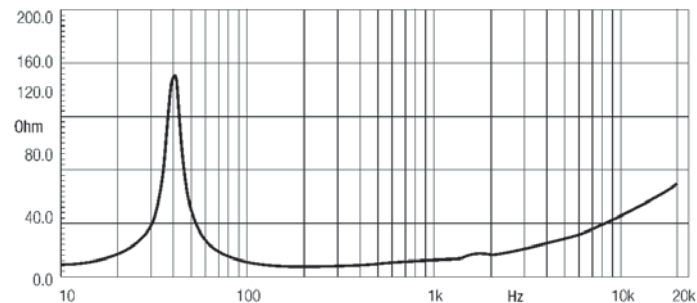

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 125 lt enclosure tuned at 50Hz using a 40-400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83 V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for #2 above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 500 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

LF Neodymium Transducer

98 dB SPL 1W / 1m average sensitivity
75 mm (3 in) edgewound voice coil (ISV)
450 W AES power handling
Neodymium magnet assembly
Weather protected cone for outdoor usage
Ideal for compact reflex subwoofer and reflex multiway systems

GENERAL SPECIFICATIONS

Nominal Diameter	380mm (15 in)
Rated Impedance	8 Ohm
AES Power (1)	450W
Program Power (2)	700W
Peak Power	1500W
Sensitivity (3)	98dB
Frequency Range (4)	38 - 5000 Hz
Power Compression @-10dB	0,5 dB
Power Compression @-3dB	2,0 dB
Power Compression @Full Power	3,0 dB
Max Recomm. Frequency	2000 Hz
Recomm. Enclosure Volume	80 - 140 lt. (2,83 - 4,95 cuft)
Minimum Impedance	6,7 Ohm at 25°C
Max Peak To Peak Excursion	33 mm (1,3 in)

THIELE SMALL PARAMETERS (5)


Fs	39 Hz
Re	5,7 Ohm
Sd	0,085 sq.mt. (131,75 sq. in.)
Qms	3,9
Qes	0,35
Qts	0,32
Vas	213 lt. (7,5 cuft)
Mms	80 gr. (0,18 lb)
BL	18 Tm
Linear Mathematical Xmax (6)	± 6,5 mm (± 0,26 in)
Le (1 kHz)	1,54 mH
Ref. Efficiency 1W@1m (half space)	97,5 dB

MOUNTING INFORMATION

Overall diameter	387 mm (15,24 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	370-371 mm (14,55-14,6 in)
Front mount baffle cutout Ø	353 mm (13,9 in)
Rear mount baffle cutout Ø	357 mm (14,06 in)
Total depth	177 mm (7,01 in)
Flange and gasket thickness	11,5 mm (0,45 in)
Net weight	4,1 kg (8,05 lb)
Shipping weight	4,8 kg (10,6 lb)
CardBoard Packaging dimensions	405 x 405 x 214 mm (15,94 x 15,94 x 8,43 in)




FREQUENCY RESPONSE CURVE

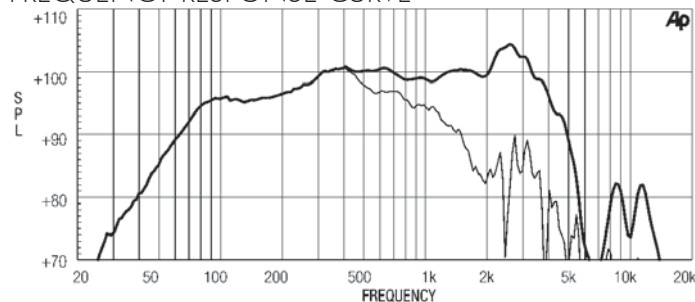

FREQUENCY RESPONSE CURVE OF 15ND830 MADE ON 125 LT. ENCLOSURE TUNED 50HZ IN FREE FIELD (API) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

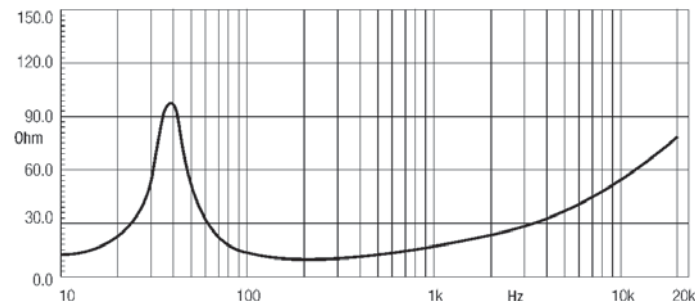

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 125 lt enclosure tuned at 50Hz using a 40-400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83 V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for #2 above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 450 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

12NLW9300

LF Neodymium Transducer


97 dB SPL 1W / 1m average sensitivity
 100 mm (4in) Interleaved Sandwich ISV aluminum voice coil
 800 W AES power handling
 Carbon fiber reinforced cone
 Double Demodulating Rings (DDR) for lower distortion
 External neodymium magnet assembly
 Weather protected cone and plates for outdoor usage
 Improved dissipation via onboard aluminum heatsink and multi-cell air diffractor
 Recommended for two way and multiway systems



GENERAL SPECIFICATIONS

Nominal Diameter	300mm (12 in)
Rated Impedance	8 Ohm
AES Power (1)	800W
Program Power (2)	1200W
Peak Power	2400W
Sensitivity (3)	97dB
Frequency Range (4)	45 - 3200 Hz
Power Compression @10dB	0,8 dB
Power Compression @3dB	2,5 dB
Power Compression @Full Power	3,1 dB
Max Recomm. Frequency	1500 Hz
Recomm. Enclosure Volume	30 - 70 lt. (1,06 - 2,47 cuft)
Minimum Impedance	6,2 Ohm at 25°C
Max Peak To Peak Excursion	37 mm (1,46 in)


FREQUENCY RESPONSE CURVE

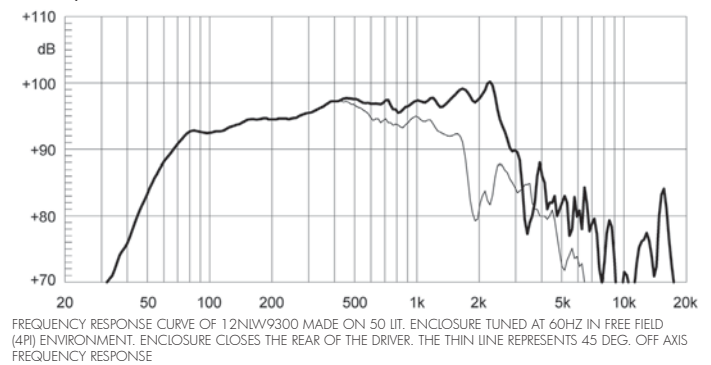

THIELE SMALL PARAMETERS (5)

Fs	40 Hz
Re	4,7 Ohm
Sd	0,053 sq.mt. (82,15 sq.in.)
Qms	4,67
Qes	0,25
Qts	0,24
Vas	87 lt. (3,07 cuft)
Mms	72 gr. (0,16 lb)
BL	18 Tm
Linear Mathematical Xmax (6)	±8mm (±0,31 in)
Le (1kHz)	0,49 mH
Ref. Efficiency 1W@1m (half space)	95,4 dB

FREE AIR IMPEDANCE MAGNITUDE CURVE

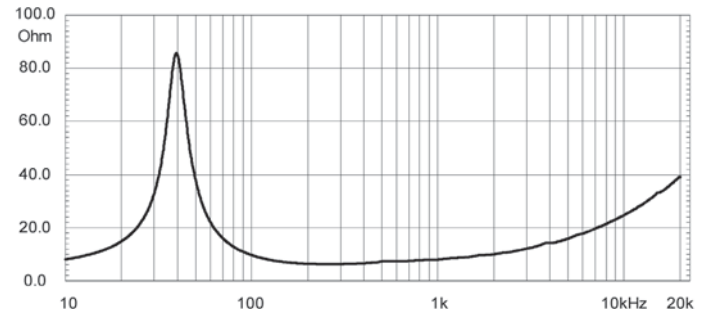

MOUNTING INFORMATION

Overall diameter	315 mm (12,4 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	296-300 mm (11,65-11,8 in)
Front mount baffle cutout Ø	282 mm (11,1 in)
Rear mount baffle cutout Ø	282 mm (11,1 in)
Total depth	153 mm (6,02 in)
Flange and gasket thickness	17 mm (0,67 in)
Net weight	6,2 kg (13,69 lb)
Shipping weight	7 kg (15,45 lb)
CardBoard Packaging dimensions	332 x 332 x 184mm (13,07 x 13,07 x 7,24 in)

NOTES

- 1) AES power is determined according to AES2-1984 (r2003) standard
- 2) Program power rating is measured in 50 lit enclosure tuned at 60Hz using a 60-600Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- 3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 1000Hz with the test specimen mounted in the same enclosure as given for #2 above.
- 4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- 5) Thiele - Small parameters are measured after the test specimen has been conditioned by 800W AES power and represent the expected long term parameters after a short period of use.
- 6) Linear Mat. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

LF Neodymium Transducer

98 dB SPL 1W / 1m average sensitivity
 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
 500 W AES power handling
 External neodymium magnet assembly
 Double Demodulating Rings (DDR) for lower distortion
 Humidity resistant cone
 Ideal for 2 way systems and compact high loading subwoofer applications

GENERAL SPECIFICATIONS

Nominal Diameter	300mm (12 in)
Rated Impedance	8 Ohm
AES Power (1)	500W
Program Power (2)	800W
Peak Power	1600W
Sensitivity (3)	98dB
Frequency Range (4)	46 - 4500 Hz
Power Compression @-10dB	0,9 dB
Power Compression @-3dB	2,2 dB
Power Compression @Full Power	3,1 dB
Max Recomm. Frequency	2000 Hz
Recomm. Enclosure Volume	30 - 100 lt. (1,06 - 3,53 cuft)
Minimum Impedance	6,4 Ohm at 25°C
Max Peak To Peak Excursion	30 mm (1,18 in)

THIELE SMALL PARAMETERS (5)


Fs	50 Hz
Re	5,5 Ohm
Sd	0,0531 sq.mt. (82,31 sq.in.)
Qms	5,64
Qes	0,218
Qts	0,21
Vas	70 lt. (2,47cuft)
Mms	57 gr. (0,13 lb)
BL	21,2 Tm
Linear Mathematical Xmax (6)	± 6,5 mm (± 0,26 in)
le (1kHz)	1,65 mH
Ref. Efficiency 1W@1m (half space)	98 dB

MOUNTING INFORMATION

Overall diameter	315 mm (12,4 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	296-300 mm (11,65-11,8 in)
Front mount baffle cutout Ø	282 mm (11,1 in)
Rear mount baffle cutout Ø	282 mm (11,1 in)
Total depth	140 mm (5,52 in)
Flange and gasket thickness	11,5 mm (0,45 in)
Net weight	4 kg (8,83 lb)
Shipping weight	4,8 kg (10,6 lb)
CardBoard Packaging dimensions	332 x 332 x 184 mm(13,07 x 13,07 x 7,24 in)




FREQUENCY RESPONSE CURVE

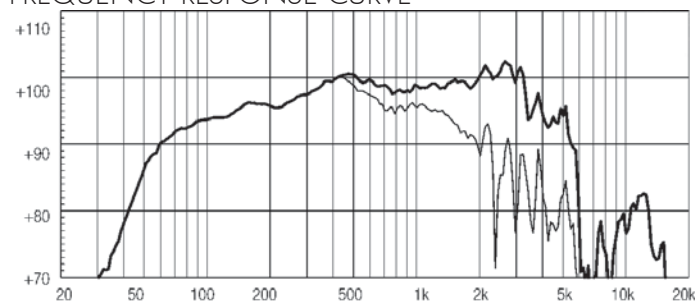

FREQUENCY RESPONSE CURVE OF 12ND930 MADE ON 50 LIT. ENCLOSURE TUNED 60HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE.

FREE AIR IMPEDANCE MAGNITUDE CURVE

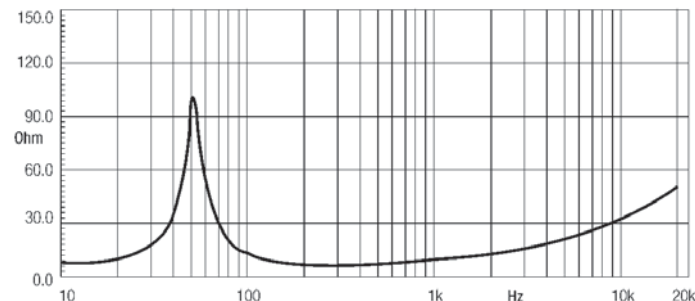

FREE AIR IMPEDANCE MAGNITUDE CURVE.

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 50 lit enclosure tuned at 60Hz using a 40-400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for #2 above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 500 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

12ND830

High Output MB Neodymium Transducer

99 dB SPL 1W / 1m average sensitivity
 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
 450 W AES power handling
 Neodymium magnet assembly
 Ideal for compact reflex enclosures and two-way systems

GENERAL SPECIFICATIONS

Nominal Diameter	300mm (12 in)
Rated Impedance	8 Ohm
AES Power (1)	450W
Program Power (2)	700W
Peak Power	1500W
Sensitivity (3)	99dB
Frequency Range (4)	53 - 5000 Hz
Power Compression @10dB	0,6 dB
Power Compression @3dB	2,0 dB
Power Compression @Full Power	3,1 dB
Max Recomm. Frequency	2000 Hz
Recomm. Enclosure Volume	40 - 100 lt. (1,41 - 3,53 cuft)
Minimum Impedance	7,0 Ohm at 25°C
Max Peak To Peak Excursion	30 mm (1,18 in)

THIELE SMALL PARAMETERS (5)


Fs	55 Hz
Re	5,7 Ohm
Sd	0,0531 sq.mt. (82,31 sq.in.)
Qms	5,15
Qes	0,296
Qts	0,28
Vas	72 lt. (2,54cuft)
Mms	46 gr. (0,10 lb)
BL	17,6 Tm
Linear Mathematical Xmax (6)	± 6,5 mm (± 0,26 in)
Le (1kHz)	1,5 mH
Ref. Efficiency 1W@1m (half space)	98,3 dB

MOUNTING INFORMATION

Overall diameter	315 mm (12,4 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	296-300 mm (11,65-11,8 in)
Front mount baffle cutout Ø	282 mm (11,1 in)
Rear mount baffle cutout Ø	282 mm (11,1 in)
Total depth	140 mm (5,52 in)
Flange and gasket thickness	11,5 mm (0,45 in)
Net weight	4 kg (8,83 lb)
Shipping weight	4,8 kg (10,6 lb)
CardBoard Packaging dimensions	332 x 332 x 184 mm (13,07 x 13,07 x 7,24 in)




FREQUENCY RESPONSE CURVE

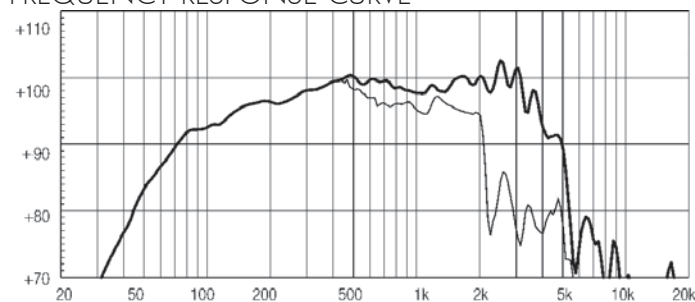

FREQUENCY RESPONSE CURVE OF 12ND830 MADE ON 50 LIT. ENCLOSURE TUNED 60HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE.

FREE AIR IMPEDANCE MAGNITUDE CURVE

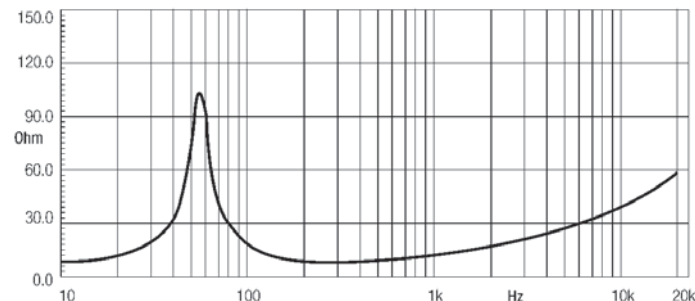

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 50 lit enclosure tuned at 60Hz using a 40-400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 450 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

Very High Output MB Neodymium Transducer

102 dB SPL 1W / 1m average sensitivity
 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
 450 W AES power handling
 Neodymium magnet assembly
 Very shallow profile, 124 mm (4,9 in)
 Water resistant cone
 Suitable for midrange and mid-bass loaded applications



GENERAL SPECIFICATIONS

Nominal Diameter	300mm (12 in)
Rated Impedance	8 Ohm
AES Power (1)	450W
Program Power (2)	700W
Peak Power	1500W
Sensitivity (3)	102dB
Frequency Range (4)	80 - 5500 Hz
Power Compression @-10dB	0,7 dB
Power Compression @-3dB	1,9 dB
Power Compression @Full Power	2,4 dB
Max Recomm. Frequency	2000 Hz
Recomm. Enclosure Volume	8 - 40 lt. (0,28 - 1,41 cuft)
Minimum Impedance	4,2 Ohm at 25°C
Max Peak To Peak Excursion	23 mm (0,91 in)


THIELE SMALL PARAMETERS (5)

Fs	46 Hz
Re	5,9 Ohm
Sd	0,0531 sq.mt. (82,31 sq.in.)
Qms	4,3
Qes	0,15
Qts	0,14
Vas	94,4 lt. (3,32 cuft)
Mms	49 gr. (0,11 lb)
BL	24 Tm
Linear Mathematical Xmax (6)	± 3,5 mm (± 0,14 in)
le (1kHz)	1,17 mH
Ref. Efficiency 1W@1m (half space)	100 dB

MOUNTING INFORMATION


Overall diameter	315 mm (12,4 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	296-300 mm (11,65-11,8 in)
Front mount baffle cutout Ø	282 mm (11,1 in)
Rear mount baffle cutout Ø	282 mm (11,1 in)
Total depth	124 mm (4,88 in)
Flange and gasket thickness	11,5 mm (0,45 in)
Net weight	3,4 kg (7,51 lb)
Shipping weight	4,2 kg (9,27 lb)
CardBoard Packaging dimensions	332 x 332 x 184 mm(13,07 x 13,07 x 7,24 in)

FREQUENCY RESPONSE CURVE

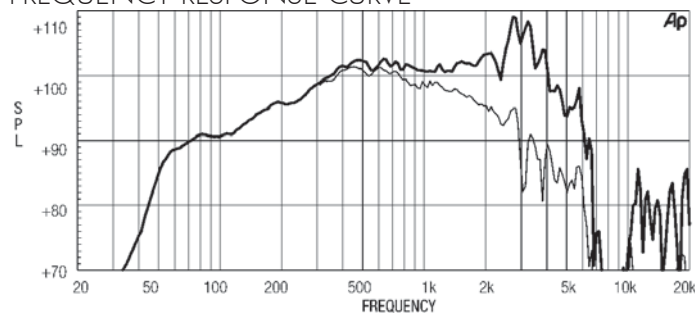

FREQUENCY RESPONSE CURVE OF 12ND610 MADE ON 50 LIT. ENCLOSURE TUNED 60HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

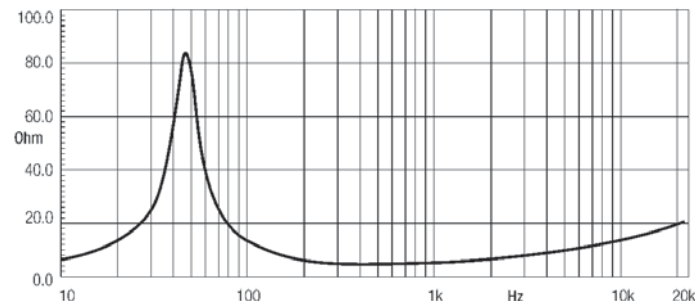

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 50 lit enclosure tuned @ 60Hz, using 60 -2000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for #2 above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 450 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

12NMB420

High Output MB Neodymium Transducer

100,5 dB SPL 1W / 1m average sensitivity
 65 mm (2,5 in) Interleaved Sandwich Voice coil (ISV)
 300 W AES power handling
 Single Demodulating Ring (SDR) for lower distortion
 Copper ring for lower intermodulation distortion
 External neodymium magnet assembly
 Weather protected cone and plates for outdoor usage
 Specially designed for compact two way systems



GENERAL SPECIFICATIONS

Nominal Diameter	300mm (12 in)
Rated Impedance	8 Ohm
AES Power (1)	300 W
Program Power (2)	450 W
Peak Power	900 W
Sensitivity (3)	100,5 dB
Frequency Range (4)	55 - 6000 Hz
Power Compression @10dB	0,9 dB
Power Compression @3dB	2,2 dB
Power Compression @Full Power	2,9 dB
Max Recomm. Frequency	2000 Hz
Recomm. Enclosure Volume	50 - 100 lt. (1,77- 3,53 cuft)
Minimum Impedance	6,9 Ohm at 25°C
Max Peak To Peak Excursion	22 mm (0,87 in)


THIELE SMALL PARAMETERS (5)

Fs	53 Hz
Re	5,2 Ohm
Sd	0,053 sq.mt. (82,15 sq.in.)
Qms	3,6
Qes	0,3
Qts	0,28
Vas	105 lt. (3,71 cuft)
Mms	33,5 gr. (73,95 lb)
BL	13,9 Tm
Linear Mathematical Xmax (6)	± 4 mm (±0,16 in)
le (1kHz)	0,2 mH
Ref. Efficiency 1W@1m (half space)	99 dB

MOUNTING INFORMATION


Overall diameter	315 mm (12,40 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	296-300 mm (11,65-11,8 in)
Front mount baffle cutout Ø	282 mm (11,10 in)
Rear mount baffle cutout Ø	282 mm (11,10 in)
Total depth	127 mm (5,00 in)
Flange and gasket thickness	11,5 mm (0,45 in)
Net weight	2,8 kg (6,2 lb)
Shipping weight	3,5 kg (7,7 lb)
CardBoard Packaging dimensions	332 x 332 x 184 mm (13,07 x 13,07 x 7,24 in)

FREQUENCY RESPONSE CURVE

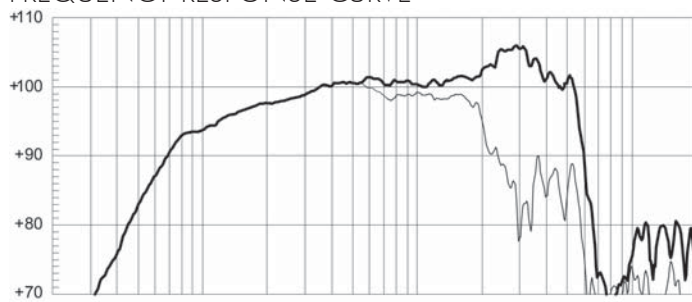

FREQUENCY RESPONSE CURVE OF 12NMB420 MADE ON 18 LIT. ENCLOSURE TUNED 60HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

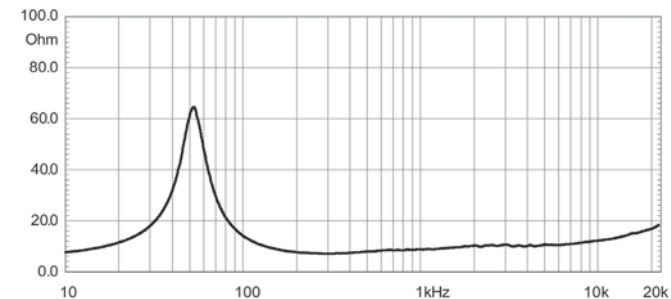

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 50 lit enclosure tuned at 60 Hz using a 70 - 3000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for #2 above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 300W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

Very High Output Neodymium MF Transducer


103 dB SPL 1W / 1m average sensitivity (AIC on)
 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
 400 W AES power handling
 Neodymium motor assembly
 A.I.C. (Active Impedance Control) technology
 Very shallow profile, 90 mm (3,5 in) total depth
 Humidity resistant cone and plates
 Suitable for high quality, very high SPL midrange frequency reproduction



GENERAL SPECIFICATIONS

Nominal Diameter	260mm (10 in)
Rated Impedance	8 Ohm
AES Power (1)	400W
Program Power (2)	600W
Peak Power	1200W
Sensitivity (3)	103dB
Frequency Range (4)	100 - 6100 Hz
Power Compression @-10dB	0,5 dB
Power Compression @-3dB	1,5 dB
Power Compression @Full Power	2,1 dB
Max Recomm. Frequency	4000 Hz
Recomm. Enclosure Volume	4 - 15 lt. (0,14 - 0,53 cuft)
Minimum Impedance	6,5 Ohm at 25°C
Max Peak To Peak Excursion	13 mm (0,51 in)

FREQUENCY RESPONSE CURVE

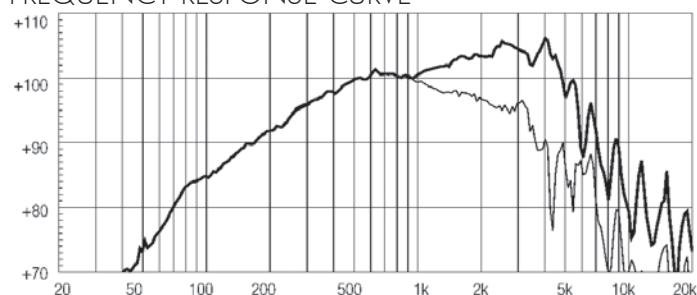


FREQUENCY RESPONSE CURVE OF 10NDA610 (AIC ON) MADE ON 30 LIT. CLOSED ENCLOSURE IN FREE FIELD (4P) ENVIRONMENT. ENCLOSURE CLOSURES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE.

THIELE SMALL PARAMETERS (5)

Fs	89 Hz
Re	5,5 Ohm
Sd	0,035 sq.mt. (54,25 sq.in.)
Qms	7,1
Qes	0,24
Qts	0,23
Vas	18 lt. (0,64 cuft)
Mms	30 gr. (0,07 lb)
BL	20,3 Tm
Linear Mathematical Xmax (6)	±2,5 mm (± 0,10 in)
Le (1kHz)	0,06 mH
Ref. Efficiency 1W@1m (half space)	98 dB

FREE AIR IMPEDANCE MAGNITUDE CURVE

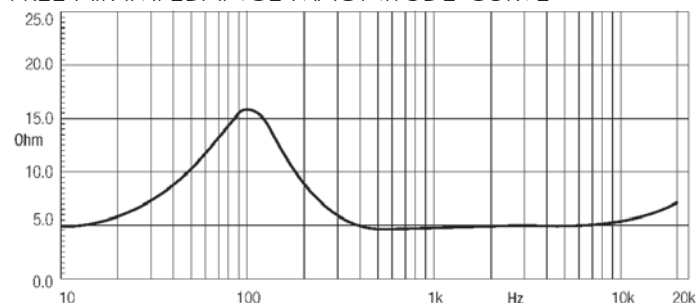

MOUNTING INFORMATION

Overall diameter	260 mm (10,24 in)
N. of mounting holes and bolt	4 on diam. 275 mm (4 on 10,83 in) 8 on diam. 244,5 mm (4 on 9,63 in)
Mounting holes diameter	7,15 mm (0,28 in)
Front mount baffle cutout Ø	232 mm (9,13 in)
Rear mount baffle cutout Ø	232 mm (9,13 in)
Total depth	96 mm (3,78 in)
Flange and gasket thickness	14,5 mm (0,57 in)
Net weight	3,5 kg (7,7 lb)
Shipping weight	3,9 kg (8,58 lb)
CardBoard Packaging dimensions	275 x 275 x 164 mm (10,83 x 10,83 x 6,46 in)
CardBoard Packaging dimensions	570x570x290 mm (22,4x22,4x11,4 in)

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in a 30 lit closed enclosure, using 100-3000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for #2 above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 400 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

10NMBA520

High Output MB Neodymium Transducer

100,5 dB SPL 1W / 1m average sensitivity (AIC on)
 65 mm (2,5 in) Interleaved Sandwich Voice coil (ISV)
 300 Watt AES power handling
 Neodymium motor assembly
 AIC (Active Impedance Control) secondary voice coil for superior intelligibility,
 very low distortion and inductance linearization
 Suitable for high quality two way compact systems
 Suitable for line array applications and multiway systems



GENERAL SPECIFICATIONS

Nominal Diameter	260mm (10 in)
Rated Impedance	8 Ohm
AES Power (1)	300W
Program Power (2)	600W
Peak Power	900W
Sensitivity (3)	100,5 dB
Frequency Range (4)	60 - 7000 Hz
Power Compression @10dB	0,7 dB
Power Compression @3dB	2,5 dB
Power Compression @Full Power	3,9 dB
Max Recomm. Frequency	2000 Hz
Recomm. Enclosure Volume	10 - 40 lt. (0,90 - 1,41 cuft)
Minimum Impedance	6,3 Ohm at 25°C
Max Peak To Peak Excursion	24 mm (0,95 in)


THIELE SMALL PARAMETERS (5)

Fs	60 Hz
Re	5 Ohm
Sd	0,035 sq.mt. (54,25 sq.in.)
Qms	4,2
Qes	0,24
Qts	0,23
Vas	42 lt. (1,48 cu ft)
Mms	28 gr. (0,06 lb)
BL	14,6 Tm
Linear Mathematical Xmax (6)	±4 mm (±0,16 in)
le (1kHz)	0,01 mH (AIC on) - 0,38 mH (AIC off)
Ref. Efficiency 1W@1m (half space)	97,8 dB

MOUNTING INFORMATION


Overall diameter	260 mm (10,24 in)
N. of mounting holes and bolt	4 on diam. 275 mm (4 on 10,83 in) 8 on diam. 244,5 mm (4 on 9,63 in)
Mounting holes diameter	7,15 mm (0,28 in)
Front mount baffle cutout Ø	232 mm (9,13 in)
Rear mount baffle cutout Ø	232 mm (9,13 in)
Total depth	104 mm (4,09 in)
Flange and gasket thickness	14,5 mm (0,57 in)
Net weight	3 kg (6,67 lb)
Shipping weight	3,57 kg (7,88 lb)
CardBoard Packaging dimensions	275 x 275 x 164mm (10,83 x 10,83 x 6,46 in)
CardBoard Packaging dimensions	570x570x290 mm (22,4x22,4x11,4 in)

FREQUENCY RESPONSE CURVE

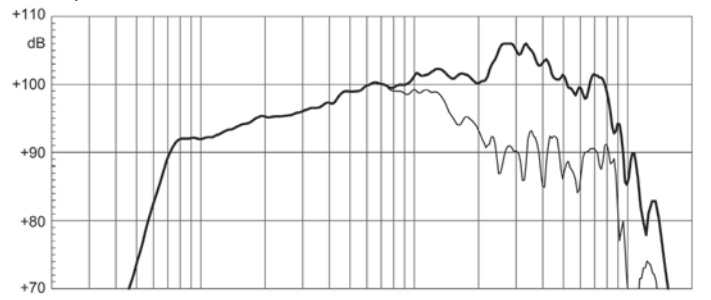

FREQUENCY RESPONSE CURVE OF 10NMBA520 (AIC ON) MADE ON 30 LIT. ENCLOSURE TUNED AT 55 HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE.

FREE AIR IMPEDANCE MAGNITUDE CURVE

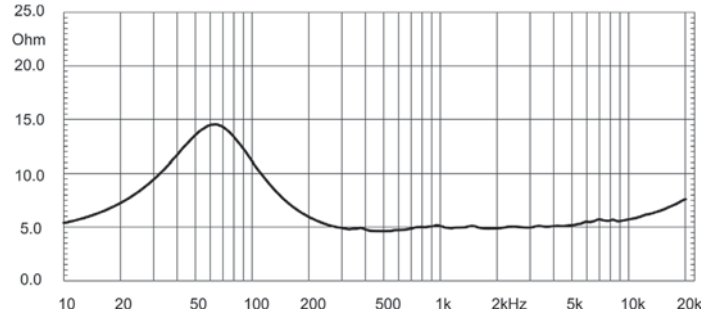

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 30 lit enclosure tuned at 55 Hz using a 100-3000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for #2 above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 300 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth..

LF Neodymium Transducer

96 dB SPL 1W / 1m average sensitivity
 65 mm (2.5 in) aluminum edgewound voice coil
 600 W program power handling
 High excursion design for low frequency clarity and punch
 Weather protected cone and coated plates for outdoor usage
 Ultra lightweight design
 Suitable for line array applications and multiway systems

GENERAL SPECIFICATIONS

Nominal Diameter	260 mm (10 in)
Rated Impedance	8 Ohm
AES Power (1)	300 W
Program Power (2)	600 W
Peak Power	1200 W
Sensitivity (3)	96 dB
Frequency Range (4)	60 - 6000 Hz
Power Compression @-10dB	0,5 dB
Power Compression @-3dB	1,3 dB
Power Compression @Full Power	2,3 dB
Max Recomm. Frequency	1800 Hz
Recomm. Enclosure Volume	10 - 40 lt. (0,35 - 1,41 cu.ft)
Minimum Impedance	6,0 Ohm at 25°C
Max Peak To Peak Excursion	25 mm (0,98 in)

THIELE SMALL PARAMETERS (5)


Fs	51 Hz
Re	5,0 Ohm
Sd	0,0346 sq.mt. (53,6 sq.in.)
Qms	8
Qes	0,29
Qts	0,28
Vas	48 lt (1.70 cu.ft.)
Mms	34 g (0.07 lb)
BL	14 Tm
Linear Mathematical Xmax (6)	± 7 mm (±0.28 in)
le (1kHz)	0,70 mH
Ref. Efficiency 1W@1m (half space)	95,2 dB

MOUNTING INFORMATION

Overall diameter	260 mm (10.24 in)
N. of mounting holes and bolt	8
Mounting holes diameter	6,1 mm (0.24 in)
Bolt circle diameter	243,5 mm (9.59 in)
Front mount baffle cutout Ø	230 mm (9.06 in)
Rear mount baffle cutout Ø	231 mm (9.09 in)
Total depth	131,8 mm (5.19 in)
Flange and gasket thickness	9,8 mm (0.39 in)
Net weight	2,7 kg (5.95 lb)
Shipping weight	3,15 kg (6.95 lb)
CardBoard Packaging dimensions	275 x 275 x 170 mm (9.25 x 9.25 x 6.69 in)




FREQUENCY RESPONSE CURVE

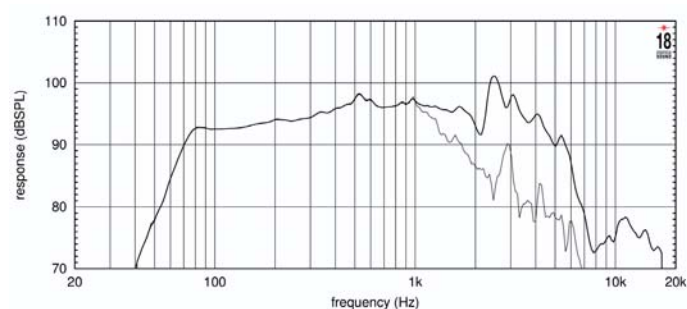

FREQUENCY RESPONSE CURVE OF 10NW650 MADE ON 25 LT. ENCLOSURE TUNED @ 65Hz IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE.

FREE AIR IMPEDANCE MAGNITUDE CURVE

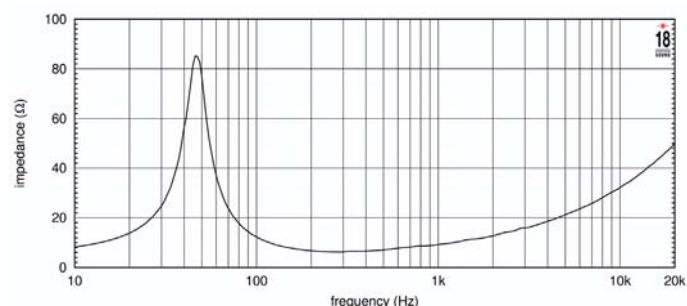

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 25 lit enclosure tuned at 55 Hz using a 70-2000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 1000Hz with the test specimen mounted in the same enclosure as given for #2 above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 1 hour 20 Hz sine and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

10NMB420

High Output MB Neodymium Transducer

99 dB SPL 1W / 1m average sensitivity
 65 mm (2.5 in) Interleaved Sandwich Voice coil (ISV)
 350 W AES power handling
 External neodymium magnet assembly
 Single Demodulating Ring (SDR) for lower distortion
 Weather protected cone and plates for outdoor usage
 Suitable for line arrays and compact two way systems



GENERAL SPECIFICATIONS

Nominal Diameter	260mm (10 in)
Rated Impedance	16 Ohm
AES Power (1)	350 W
Program Power (2)	500 W
Peak Power	1000 W
Sensitivity (3)	99 dB
Frequency Range (4)	65 - 5000 Hz
Power Compression @-10dB	0,8 dB
Power Compression @-3dB	2,2 dB
Power Compression @Full Power	2,9 dB
Max Recomm. Frequency	2000 Hz
Recomm. Enclosure Volume	10 - 40 lt. (0,35 - 1,41 cu.ft)
Minimum Impedance	11,9Ohm at 25°C
Max Peak To Peak Excursion	25 mm (1 in)


THIELE SMALL PARAMETERS (5)

Fs	65 Hz
Re	10,5 Ohm
Sd	0,0346 sq.mt. (53,6 sq.in.)
Qms	4,6
Qes	0,36
Qts	0,33
Vas	30 lt. (1,06 cu.ft.)
Mms	31,5 gr. (0,07 lb)
BL	19,5 Tm
Linear Mathematical Xmax (6)	± 4 mm (±0,16 in)
le (1kHz)	0,4 mH
Ref. Efficiency 1W@1m (half space)	96 dB

MOUNTING INFORMATION


Overall diameter	260 mm (10,24 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7 mm (0,27 in)
Bolt circle diameter	244 mm (9,6 in)
Front mount baffle cutout Ø	232 mm (9,1 in)
Rear mount baffle cutout Ø	232 mm (9,1 in)
Total depth	122 mm (4,8 in)
Flange and gasket thickness	11 mm (0,43 in)
Net weight	3 kg (6,6 lb)
Shipping weight	3,5 kg (7,7 lb)
CardBoard Packaging dimensions	275 x 275 x 164 mm (9,25 x 9,25 x 5,91 in)

FREQUENCY RESPONSE CURVE

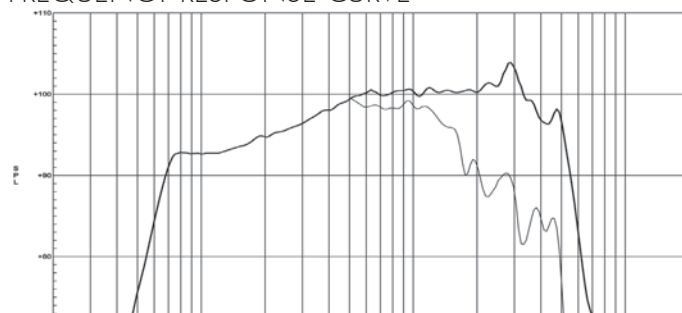

FREQUENCY RESPONSE CURVE OF 10NMB420 MADE ON 30LT. ENCLOSURE TUNED @ 55Hz IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE.

FREE AIR IMPEDANCE MAGNITUDE CURVE

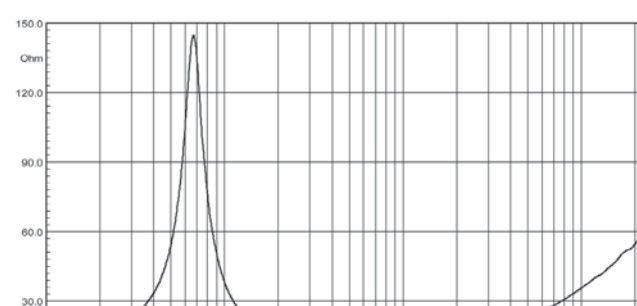

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 30 lit enclosure tuned at 55 Hz using a 70-2000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 4V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for #2 above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 350 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

LF Neodymium Transducer

96 dB SPL 1W / 1m average sensitivity

65 mm (2.5 in) aluminum edgewound voice coil

600 W program power handling

High excursion design for low frequency clarity and punch

Weather protected cone and coated plates for outdoor usage

Ultra lightweight design

Suitable for line array applications and multiway systems

GENERAL SPECIFICATIONS

Nominal Diameter	200mm (8 in)
Rated Impedance	8 Ohm
AES Power (1)	300 W
Program Power (2)	600 W
Peak Power	1200 W
Sensitivity (3)	96 dB
Frequency Range (4)	55 - 6300 Hz
Power Compression @-10dB	0,8 dB
Power Compression @-3dB	2,2 dB
Power Compression @Full Power	3,0 dB
Max Recomm. Frequency	2500 Hz
Recomm. Enclosure Volume	10 - 40 lt. (0.36 - 1.41 cuft)
Minimum Impedance	6,3 Ohm at 25°C
Max Peak To Peak Excursion	26 mm (1.02 in)

THIELE SMALL PARAMETERS (5)


Fs	63 Hz
Re	6,1 Ohm
Sd	0,0227 sq.mt. (35,19 sq.in.)
Qms	3,7
Qes	0,27
Qts	0,25
Vas	17,8 lt. (0.63 cuft)
Mms	26 gr. (0.06 lb)
BL	15,2 Tm
Linear Mathematical Xmax (6)	± 5.5 mm (±0,22 in)
le (1kHz)	0,71 mH
Ref. Efficiency 1W@1m (half space)	94,0 dB

MOUNTING INFORMATION

Overall diameter	210 mm (8,3 in)
N. of mounting holes and bolt	6
Mounting holes diameter	6 mm (0,23 in)
Bolt circle diameter	195-198 mm (7,68-7,8 in)
Front mount baffle cutout Ø	185 mm (7,28 in)
Rear mount baffle cutout Ø	185,5 mm (7,3 in)
Total depth	111,3 mm (4.38 in)
Flange and gasket thickness	8,8 mm (0,35 in)
Net weight	2,2 kg (4,85 lb)
Shipping weight	2,5 kg (5,51 lb)
CardBoard Packaging dimensions	235 x 235 x 150 mm (9,25 x 9,25 x 5,91 in)




FREQUENCY RESPONSE CURVE

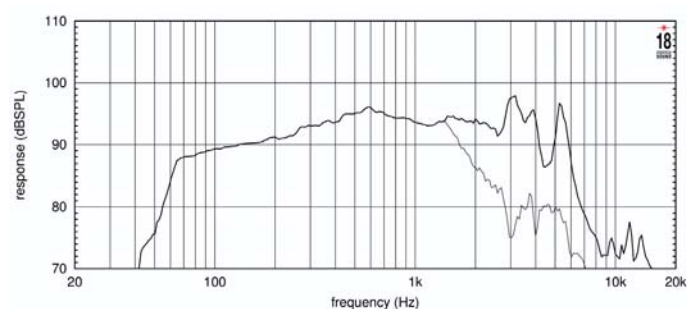

FREQUENCY RESPONSE CURVE OF 8NW650 MADE ON 25LIT. ENCLOSURE TUNED 65HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

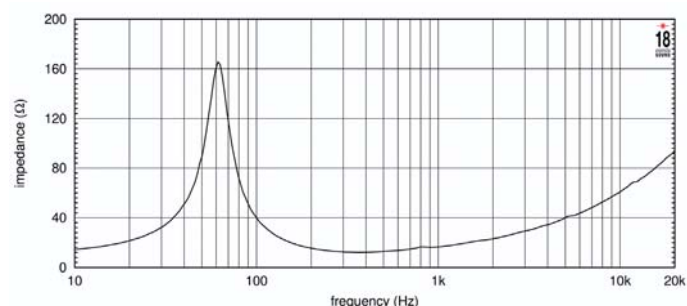

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- 1) AES power is determined according to AES2-1984 (r2003) standard
- 2) Program power rating is measured in 25 lit enclosure tuned 65Hz using a 70 - 700 Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- 3) The peak power rating represents the maximum permitted instantaneous peak power level over a maximum period of 10ms which will be withstood by the loudspeaker without damage.
- 4) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for #2 above.
- 5) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- 6) Linear Math. Xmax is calculated as $(H_{vc}-H_g)/2 + H_g/4$ where H_{vc} is the coil depth and H_g is the gap depth.

8NMB420

High Output MB Neodymium Transducer

95 dB SPL 1W / 1m average sensitivity
 51 mm (2 in) Interleaved Sandwich Voice coil (ISV)
 280 W AES power handling
 External neodymium magnet assembly
 Single Demodulating Ring (SDR) for lower distortion
 Weather protected cone and plates for outdoor usage
 Suitable for line arrays and compact two way systems

GENERAL SPECIFICATIONS

Nominal Diameter	200mm (8 in)
Rated Impedance	8 Ohm
AES Power (1)	280 W
Program Power (2)	400 W
Peak Power	800 W
Sensitivity (3)	95 dB
Frequency Range (4)	60 - 5500 Hz
Power Compression @-10dB	0,8 dB
Power Compression @-3dB	1,7 dB
Power Compression @Full Power	2,2 dB
Max Recomm. Frequency	2500 Hz
Recomm. Enclosure Volume	10 - 40 lt. (0,35 - 1,41 cuft)
Minimum Impedance	5,9 Ohm at 25°C
Max Peak To Peak Excursion	19 mm (0,7 in)

THIELE SMALL PARAMETERS (5)


Fs	61 Hz
Re	5 Ohm
Sd	0,022 sq.mt. (34,1 sq.in.)
Qms	4
Qes	0,31
Qts	0,28
Vas	33 lt. (1,2cuft)
Mms	14,9 gr. (0.033 lb)
BL	10 Tm
Linear Mathematical Xmax (6)	± 5,75 mm (±0,23 in)
le (1kHz)	0,35 mH
Ref. Efficiency 1W@1m (half space)	95,6dB

MOUNTING INFORMATION

Overall diameter	210 mm (8,3 in)
N. of mounting holes and bolt	6
Mounting holes diameter	6 mm (0,23 in)
Bolt circle diameter	195-198 mm (7,68-7,8 in)
Front mount baffle cutout Ø	186 mm (7,3 in)
Rear mount baffle cutout Ø	184 mm (7,2 in)
Total depth	99 mm (3,9 in)
Flange and gasket thickness	14,5 mm (0,6 in)
Net weight	1,7 kg (3,7 lb)
Shipping weight	2,0 kg (4,4 lb)
CardBoard Packaging dimensions	235 x 235 x 150 mm (9,25 x 9,25 x 5,91 in)




FREQUENCY RESPONSE CURVE

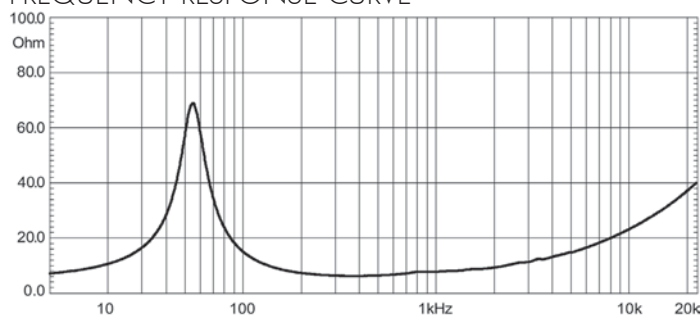

FREQUENCY RESPONSE CURVE OF 8NMB420 MADE ON 25LIT. ENCLOSURE TUNED 65HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

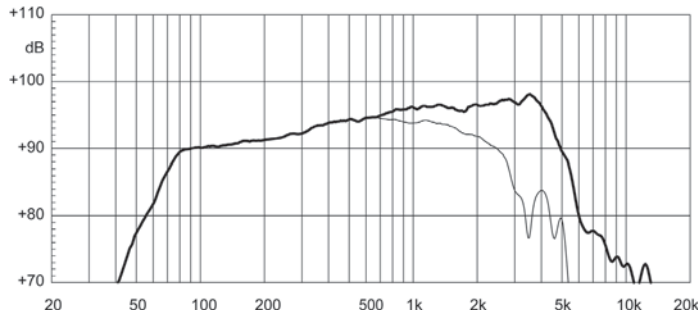

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 25 lit enclosure tuned 65Hz using a 60 - 2000 Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for #2 above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 280 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

LF Neodymium Transducer

92,5 dB SPL 1W / 1m average sensitivity
 45 mm (1,77 in) aluminum voice coil
 200 W AES power handling
 Neodymium motor assembly
 Weather protected cone
 Improved heat dissipation via unique basket design
 Ideal for compact two way and multiway systems

GENERAL SPECIFICATIONS

Nominal Diameter	152mm (6 in)
Rated Impedance	8 Ohm
AES Power (1)	200 W
Program Power (2)	260 W
Peak Power	500 W
Sensitivity (3)	92,5 dB
Frequency Range (4)	63 - 5500 Hz
Power Compression @-10dB	1,0 dB
Power Compression @-3dB	1,5 dB
Power Compression @Full Power	2,9 dB
Max Recomm. Frequency	3000 Hz
Recomm. Enclosure Volume	10 - 40 lt. (0,35 - 1,41 cuft)
Minimum Impedance	6,1 Ohm at 25°C
Max Peak To Peak Excursion	22 mm (0,87 in)

THIELE SMALL PARAMETERS (5)


Fs	61 Hz
Re	5.5 Ohm
Sd	0,0133 sq.mt. (20,6 sq.in.)
Qms	6.5
Qes	0.28
Qts	0.27
Vas	12.6 lt. (0,4 cuft)
Mms	13,3 gr. (0,03 lb)
BL	10.0 Tm
Linear Mathematical Xmax (6)	± 5 mm (±0,20 in)
le (1kHz)	0.28 mH
Ref. Efficiency 1W@1m (half space)	92 dB

MOUNTING INFORMATION

Overall diameter	162 mm (6,38 in)
N. of mounting holes and bolt	4
Mounting holes diameter	5,5 mm (0,22 in)
Bolt circle diameter	170 mm (6,69 in)
Front mount baffle cutout Ø	148 mm (5,38 in)
Rear mount baffle cutout Ø	148 mm (5,38 in)
Total depth	73 mm (2,87 in)
Flange and gasket thickness	9,5 mm (0,37 in)
Net weight	1,25 kg (2,76 lb)
Shipping weight	1,8 kg (3,97 lb)
CardBoard Packaging dimensions	170 x 170 x 80 mm (6,69 x 6,69 x 3,15 in)




FREQUENCY RESPONSE CURVE

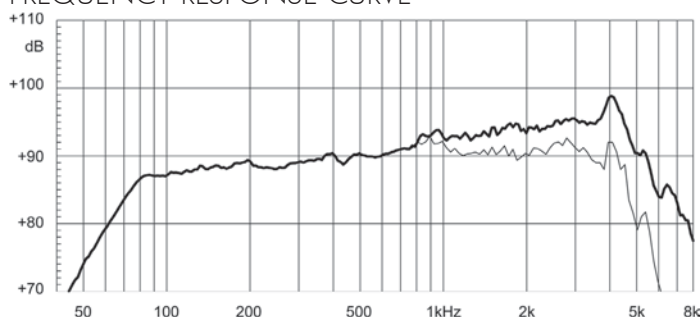

FREQUENCY RESPONSE CURVE OF 6ND430 MADE ON 18 LIT. ENCLOSURE TUNED AT 60Hz IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

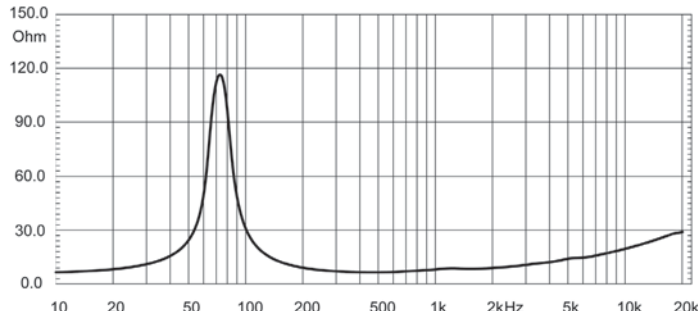

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 18 lit enclosure tuned at 60 Hz using a 70 - 3000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for #2 above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 200 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth..

6NMB420

High Output MB Neodymium Transducer

100 dB SPL 1W / 1m average sensitivity
 44 mm (1 3/4 in) voice coil
 200 W AES power handling
 External neodymium magnet assembly
 Single Demodulating Ring (SDR) for lower distortion
 Weather protected cone and plates for outdoor usage
 Improved heat dissipation via Active Cooling System
 Specially designed for line arrays and compact two way systems

GENERAL SPECIFICATIONS

Nominal Diameter	152mm (6 in)
Rated Impedance	8 Ohm
AES Power (1)	200 W
Program Power (2)	260 W
Peak Power	500 W
Sensitivity (3)	100 dB
Frequency Range (4)	200 - 7000 Hz
Power Compression @10dB	0,9 dB
Power Compression @3dB	1,6 dB
Power Compression @Full Power	2,9 dB
Max Recomm. Frequency	3500 Hz
Recomm. Enclosure Volume	2 - 6 lt. (0,07 - 0,21 cuft)
Minimum Impedance	6,2 Ohm at 25°C
Max Peak To Peak Excursion	14 mm (0,55 in)

THIELE SMALL PARAMETERS (5)


Fs	110 Hz
Re	5,3 Ohm
Sd	0,013 sq.mt. (20,15 sq.in.)
Qms	2,7
Qes	0,38
Qts	0,33
Vas	6,1 lt. (0,22 cuft)
Mms	8,5 gr. (18,76 lb)
BL	9 Tm
linear Mathematical Xmax (6)	± 3 mm (±0,12 in)
le (1kHz)	0,1 mH
Ref. Efficiency 1W@1m (half space)	95,1 dB

MOUNTING INFORMATION


Overall diameter	162 mm (6,38 in)
N. of mounting holes and bolt	4
Mounting holes diameter	5,5 mm (0,22 in)
Bolt circle diameter	170 mm (6,69 in)
Front mount baffle cutout Ø	148 mm (5,38 in)
Rear mount baffle cutout Ø	148 mm (5,38 in)
Total depth	73 mm (2,87 in)
Flange and gasket thickness	11,5 mm (0,45 in)
Net weight	1,25 kg (2,76 lb)
Shipping weight	1,8 kg (3,97 lb)
CardBoard Packaging dimensions	170 x 170 x 80 mm (6,69 x 6,69 x 3,15 in)



FREQUENCY RESPONSE CURVE

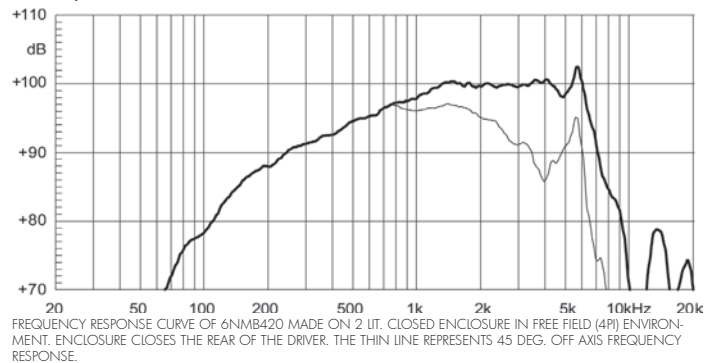

FREE AIR IMPEDANCE MAGNITUDE CURVE

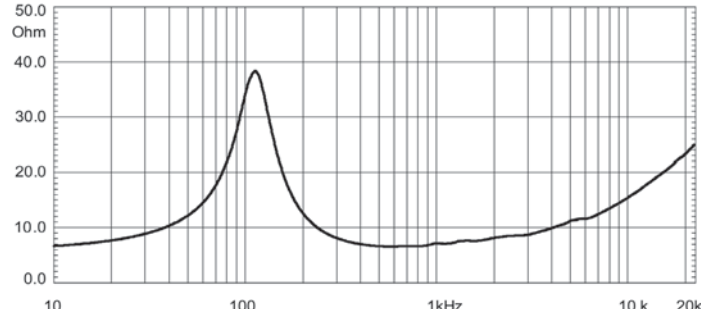

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 2 lit closed enclosure using a 150-3000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 200 W AES power and represent the expected long term parameters after a short period of use.
- (6) linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

Very High Output Neodymium MF Transducer

102 dB SPL 1W / 1m average sensitivity
 45 mm (1,77 in) edgewound aluminum voice coil
 180 W AES power handling
 Neodymium motor assembly
 Extremely high sound quality
 Very shallow profile, 58 mm (2,3 in)
 Suitable for horn and direct radiation midrange applications

GENERAL SPECIFICATIONS

Nominal Diameter	152mm (6 in)
Rated Impedance	8 Ohm
AES Power (1)	180 W
Program Power (2)	240 W
Peak Power	480 W
Sensitivity (3)	102 dB
Frequency Range (4)	200 - 8000 Hz
Power Compression @-10dB	0,7 dB
Power Compression @-3dB	1,2 dB
Power Compression @Full Power	1,6 dB
Max Recomm. Frequency	5000 Hz
Recomm. Enclosure Volume	1 - 5 lt. (0,04 - 0,18 cuft)
Minimum Impedance	8,2 Ohm at 25°C
Max Peak To Peak Excursion	8 mm (0,31 in)

THIELE SMALL PARAMETERS (5)


Fs	120 Hz
Re	5,9 Ohm
Sd	0,0143 sq.mt. (20,6 sq.in.)
Qms	2,2
Qes	0,27
Qts	0,24
Vas	6,2 lt. (0,22 cuft)
Mms	8,2 gr. (0,02 lb)
BL	11,6 Tm
Linear Mathematical Xmax (6)	± 2 mm (±0,08 in)
le (1kHz)	0,67 mH
Ref. Efficiency 1W@1m (half space)	97,9 dB

MOUNTING INFORMATION

Overall diameter	162 mm (6,38 in)
N. of mounting holes and bolt	4
Mounting holes diameter	5,5 mm (0,22 in)
Bolt circle diameter	170 mm (6,69 in)
Front mount baffle cutout Ø	148 mm (5,88 in)
Rear mount baffle cutout Ø	148 mm (5,88 in)
Total depth	60 mm (2,3 in)
Flange and gasket thickness	9,5 mm (0,37 in)
Net weight	1,25 kg (2,76 lb)
Shipping weight	1,8 kg (3,97 lb)
CardBoard Packaging dimensions	170 x 170 x 80 mm (6,69 x 6,69 x 3,15 in)




FREQUENCY RESPONSE CURVE

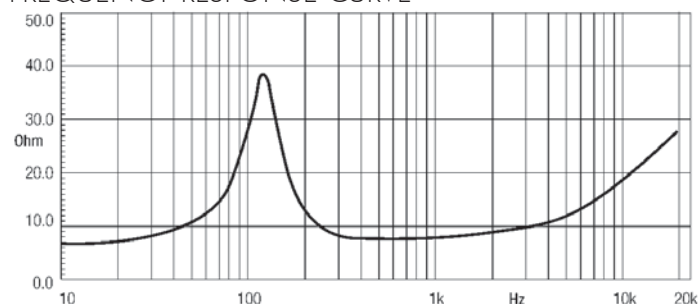

FREQUENCY RESPONSE CURVE OF 6ND410 MADE ON 2 lit. CLOSED ENCLOSURE IN FREE FIELD (4Pi) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

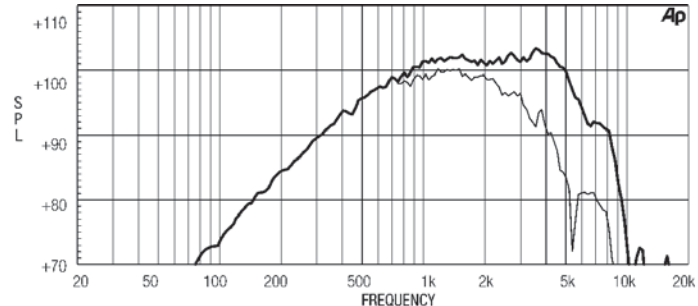

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 2 lit closed enclosure using a 300 -3000Hz band limited pink noise test signalwith 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted inthe same enclosure as given for #2 above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 180 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.



LF TRANSDUCERS - FERRITE



Extended LF Ferrite Transducer

99 dB SPL 1W / 1m average sensitivity
 100 mm (4 in) Interleaved Sandwich Voice coil (ISV)
 1400W AES power handling
 Carbon fiber reinforced straight-ribbed cone
 Double Silicon Spider (DSS) for improved excursion control and linearity
 Double Demodulating Rings (DDR) for lower distortion
 Improved heat dissipation via unique basket design
 Weather protected cone and plates for outdoor usage
 Suitable for ultra low frequency systems

GENERAL SPECIFICATIONS

Nominal Diameter	533 mm (21 in)
Rated Impedance	8 Ohm
AES Power (1)	1400 W
Program Power (2)	1600 W
Peak Power	7000 W
Sensitivity (3)	99 dB
Frequency Range (4)	24 - 2000 Hz
Power Compression @10dB	0,6 dB
Power Compression @3dB	1,5 dB
Power Compression @Full Power	2,2 dB
Max Recomm. Frequency	250 Hz
Recomm. Enclosure Volume	120 - 500 lt. (4,24 - 17,7 cuft)
Minimum Impedance	6,4 Ohm at 25°C
Max Peak To Peak Excursion	52 mm (2,05 in)

THIELE SMALL PARAMETERS (5)


Fs	28 Hz
Re	5 Ohm
Sd	0,1662 sq.mt. (257,6 sq.in.)
Qms	9,32
Qes	0,242
Qts	0.235
Vas	385 lt. (13,6 cuft)
Mms	296 gr. (0,65 lb)
BL	33,5 Tm
Linear Mathematical Xmax (6)	± 9,5 mm (± 0,37 in)
Le (1 kHz)	2,85 mH
Ref. Efficiency 1W@1m (half space)	98,0 dB

MOUNTING INFORMATION

Overall diameter	545 mm (21,46 in)
N. of mounting holes and bolt	8
Mounting holes diameter	10 mm (0,39 in)
Bolt circle diameter	520 mm (20,47 in)
Front mount baffle cutout Ø	492 mm (19,37 in)
Rear mount baffle cutout Ø	490 mm (19,29 in)
Total depth	256,3 mm (10,1 in)
Flange and gasket thickness	14 mm (0,55 in)
Net weight	19,2 kg (42,38 lb)
Shipping weight	20,6 kg (45,47 lb)
CardBoard Packaging dimensions	550 x 550 x 300 mm (21,65 x 21,65 x 11,8 in)




FREQUENCY RESPONSE CURVE

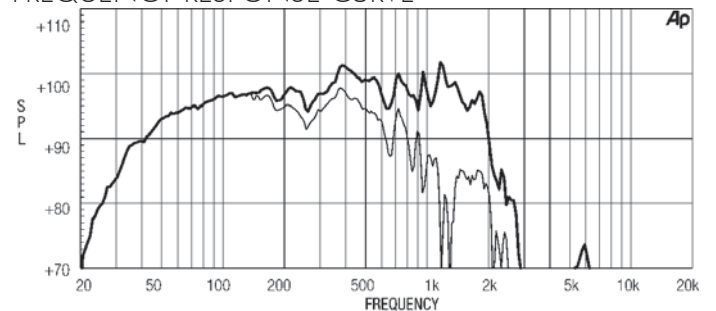

FREQUENCY RESPONSE CURVE OF 21LW1400 MADE ON 250 LIT. ENCLOSURE TUNED 28HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

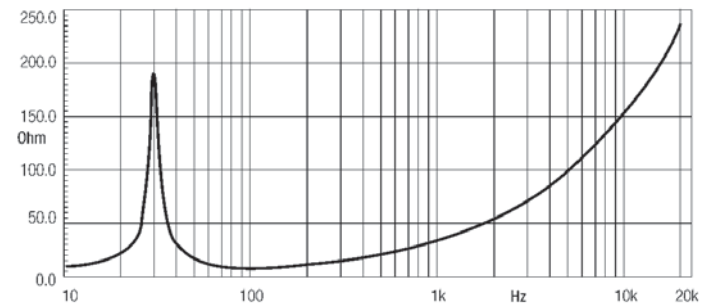

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 250 lit enclosure tuned 28Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 1500 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

18TLW3000

Extended LF Ferrite Transducer

3600 W program power handling
 100 mm (4 in) Tetracoil dual voice coil, equivalent to a single coil diameter larger than 152 mm (> 6 in)
 Ultra linear suspension behavior for excellent sound clarity
 Symmetric flux density and inductance behaviour
 Low noise forced air cooling design
 Water repellent cone and epoxy coated plates for outdoor use
 Suitable for vented, horn loaded and bandpass subwoofer design

GENERAL SPECIFICATIONS

Nominal Diameter	460 mm (18 in)
Rated Impedance	8 Ohm
AES Power (1)	1800 W
Program Power (2)	3600 W
Peak Power	10000 W
Sensitivity (3)	95 dB
Frequency Range (4)	30 - 2000 Hz
Power Compression @-10dB	0,6 dB
Power Compression @-3dB	2,0 dB
Power Compression @Full Power	3,4 dB
Max Recomm. Frequency	300 Hz
Recomm. Enclosure Volume	100 - 350 lt. (3,53 - 12,36 cuft)
Minimum Impedance	5,7 Ohm at 25°C
Max Peak To Peak Excursion	45 mm (1.77 in)

THIELE SMALL PARAMETERS (5)


Fs	33 Hz
Re	4,6 Ohm
Sd	0,1225 sq. mt. (189,88 sq. in.)
Qms	13,00
Qes	0,42
Qts	0,41
Vas	185 lt. (6.53 cuft)
Mms	266 gr. (0,59 lb)
BL	24,5 Tm
linear Mathematical Xmax (6)	± 12 mm (± 0,47 in)
le (1kHz)	1,80 mH
Ref. Efficiency 1W@1m (half space)	94,0 dB

MOUNTING INFORMATION

Overall diameter	462 mm (18,18 in)
N. of mounting holes and bolt	8
Mounting holes diameter	8,5 mm (0,33 in)
Bolt circle diameter	438-440 mm (17,24-17,32 in)
Front mount baffle cutout Ø	425 mm (16,73 in)
Rear mount baffle cutout Ø	414 mm (16,30 in)
Total depth	275 mm (10,83 in)
Flange and gasket thickness	24 mm (0,94 in)
Net weight	13,2 kg (29,10 lb)
Shipping weight	14 kg (30,86 lb)
CardBoard Packaging dimensions	482 x 482 x 257 mm (19 x 19 x 10,1 in)




FREQUENCY RESPONSE CURVE

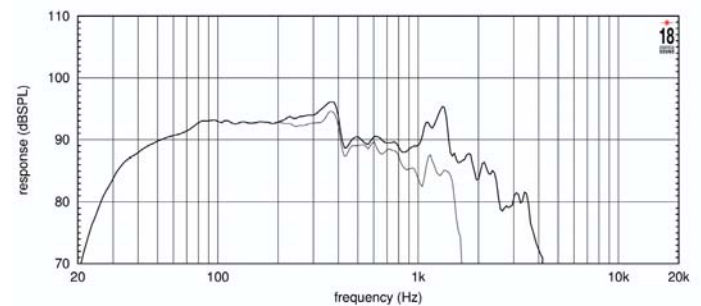

FREQUENCY RESPONSE MADE IN 180 LT. ENCLOSURE TUNED AT 35 Hz IN FREE FIELD (4p) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER, THE THIN LINE REPRESENTS 45° OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

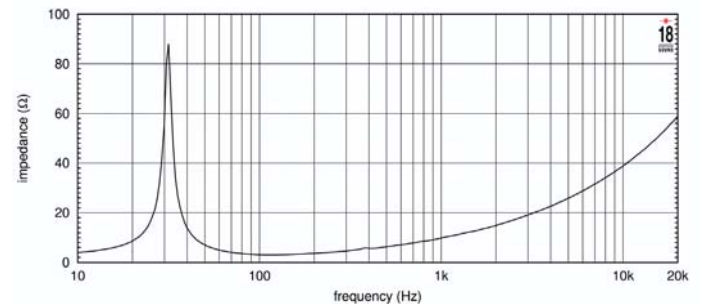

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 180 lit enclosure tuned 35Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 1 hour 20 Hz sine and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.



18LW2400

Extended LF Ferrite Transducer


98 dB SPL 1W / 1m average sensitivity
 100 mm (4 in) Interleaved Sandwich Voice coil (ISV)
 2400 W program power handling
 Fiberglass reinforced cone
 Double Silicon Spider (DSS) for superior excursion control and linearity
 Double Demodulating Rings (DDR) for lower distortion
 Improved heat dissipation via multi-cell air diffractor and multiple backplate vents
 Weather protected cone and plates for outdoor usage
 Ideal for high SPL subwoofer designs



GENERAL SPECIFICATIONS

Nominal Diameter	460 mm (18 in)
Rated Impedance	8 Ohm
AES Power (1)	1200 W
Program Power (2)	2400 W
Peak Power	7000 W
Sensitivity (3)	98 dB
Frequency Range (4)	31 - 2500 Hz
Power Compression @-10dB	0,7 dB
Power Compression @-3dB	1,5 dB
Power Compression @Full Power	2,2 dB
Max Recomm. Frequency	500 Hz
Recomm. Enclosure Volume	130 - 350 lt. (4,59 - 12,36 cuft)
Minimum Impedance	6,3 Ohm at 25°C
Max Peak To Peak Excursion	50 mm (1,97 in)


FREQUENCY RESPONSE CURVE

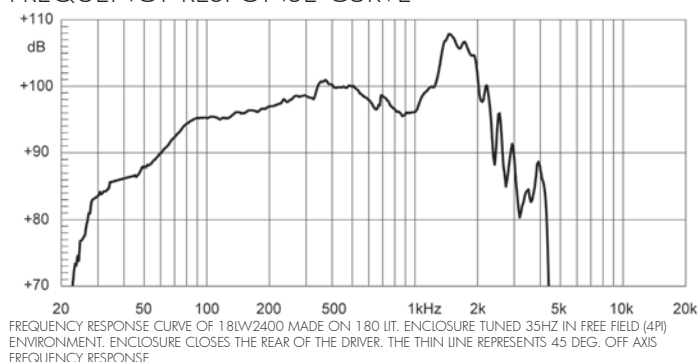

THIELE SMALL PARAMETERS (5)

Fs	35 Hz
Re	5 Ohm
Sd	0,1225 sq. mt. (189,88 sq. in.)
Qms	7,2
Qes	0,32
Qts	0,31
Vas	230 lt. (8,12 cuft)
Mms	192 gr. (0,42 lb)
BL	25,6 Tm
Linear Mathematical Xmax (6)	± 9,5 mm (± 0,38 in)
Le (1 kHz)	1,35 mH
Ref. Efficiency 1W@1m (half space)	96,7 dB

FREE AIR IMPEDANCE MAGNITUDE CURVE

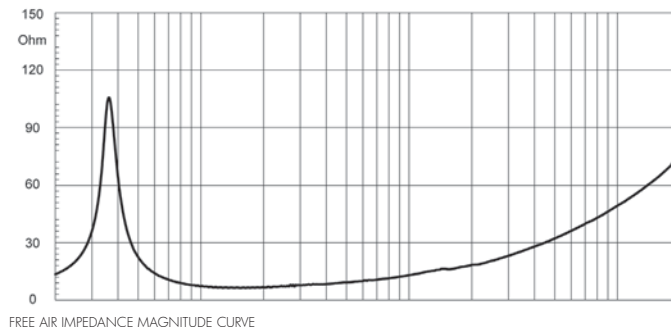

MOUNTING INFORMATION

Overall diameter	462 mm (18,18 in)
N. of mounting holes and bolt	8
Mounting holes diameter	8,5 mm (0,33 in)
Bolt circle diameter	438-440 mm (17,24-17,32 in)
Front mount baffle cutout Ø	416 mm (16,38 in)
Rear mount baffle cutout Ø	422 mm (16,61 in)
Total depth	214,4 mm (8,44 in)
Flange and gasket thickness	24,5 mm (0,96 in)
Net weight	11,9 kg (26,18 lb)
Shipping weight	13,5 kg (29,7 lb)
CardBoard Packaging dimensions	482 x 482 x 257 mm (19 x 19 x 10,1 in)

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 180 lit enclosure tuned 35Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 1200 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

18LW1400

Extended LF Ferrite Transducer


98 dB SPL 1W / 1m average sensitivity
 100 mm (4 in) Interleaved Sandwich Voice coil (ISV)
 1000W AES power handling
 Carbon fiber reinforced straight ribbed cone
 Double Silicon Spider (DSS) for improved excursion control and linearity
 Double Demodulating Rings (DDR) for lower distortion
 Improved heat dissipation via unique basket design and multiple backplate vents
 Weather protected cone and plates for outdoor usage
 Ideal for high SPL subwoofer designs



GENERAL SPECIFICATIONS

Nominal Diameter	460 mm (18 in)
Rated Impedance	8 Ohm
AES Power (1)	1000 W
Program Power (2)	1400 W
Peak Power	7000 W
Sensitivity (3)	98 dB
Frequency Range (4)	28 - 2500 Hz
Power Compression @-10dB	0,8 dB
Power Compression @-3dB	2,1 dB
Power Compression @Full Power	3,0 dB
Max Recomm. Frequency	500 Hz
Recomm. Enclosure Volume	130 - 350 lt. (4,59 - 12,36 cuft)
Minimum Impedance	6,4 Ohm at 25°C
Max Peak To Peak Excursion	50 mm (1,97 in)

FREQUENCY RESPONSE CURVE

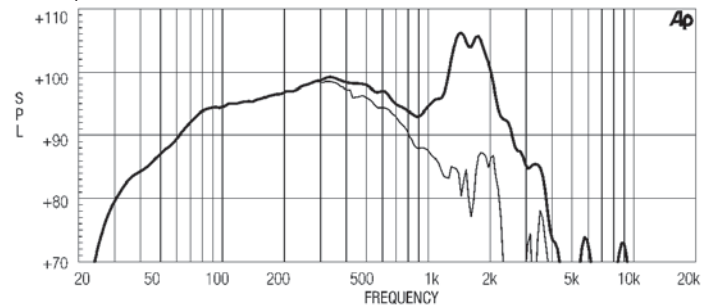


FREQUENCY RESPONSE CURVE OF 18LW1400 MADE ON 180 LIT. ENCLOSURE TUNED 35Hz IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE.

THIELE SMALL PARAMETERS (5)

Fs	31 Hz
Re	5 Ohm
Sd	0,1225 sq. mt. (189,88 sq. in.)
Qms	7,2
Qes	0,31
Qts	0,29
Vas	297 lt. (10,49 cuft)
Mms	190 gr. (0,42 lb)
BL	24,7 Tm
Linear Mathematical Xmax (6)	± 9 mm (± 0,35 in)
Le (1 kHz)	2,3 mH
Ref. Efficiency 1W@1m (half space)	96,5 dB

FREE AIR IMPEDANCE MAGNITUDE CURVE

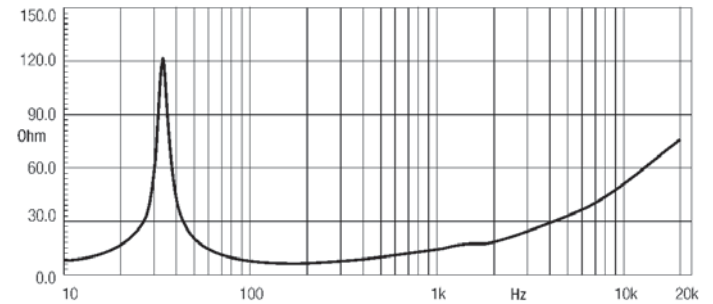

FREE AIR IMPEDANCE MAGNITUDE CURVE

MOUNTING INFORMATION

Overall diameter	462 mm (18,18 in)
N. of mounting holes and bolt	8
Mounting holes diameter	8,5 mm (0,33 in)
Bolt circle diameter	438-440 mm (17,24-17,32 in)
Front mount baffle cutout Ø	416 mm (16,38 in)
Rear mount baffle cutout Ø	422 mm (16,61 in)
Total depth	215,4 mm (8,48 in)
Flange and gasket thickness	26 mm (1,02 in)
Net weight	13,3 kg (29,36 lb)
Shipping weight	14,9 kg (32,9 lb)
CardBoard Packaging dimensions	482 x 482 x 257 mm (19 x 19 x 10,1 in)

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 180 lit enclosure tuned 35Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 1000 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.



18LW1250

Extended LF Ferrite Transducer

98 dB SPL 1W / 1m average sensitivity
100 mm (4 in) Interleaved Sandwich Voice coil (ISV)
1000 W AES power handling
Double Silicon Spider (DSS) for improved excursion control and linearity
Weather protected cone and plates for outdoor usage
Improved heat dissipation via unique basket design and backplate vents
Suitable for high SPL subwoofer design

GENERAL SPECIFICATIONS

Nominal Diameter	460 mm (18 in)
Rated Impedance	8 Ohm
AES Power (1)	1000 W
Program Power (2)	1400 W
Peak Power	7000 W
Sensitivity (3)	98 dB
Frequency Range (4)	35 - 3500 Hz
Power Compression @10dB	0,7 dB
Power Compression @3dB	1,6 dB
Power Compression @Full Power	2,6 dB
Max Recomm. Frequency	500 Hz
Recomm. Enclosure Volume	120 - 350 lt. (4,24 - 12,36 cuft)
Minimum Impedance	6,4 Ohm at 25°C
Max Peak To Peak Excursion	36 mm (1,42 in)

THIELE SMALL PARAMETERS (5)


Fs	35 Hz
Re	5 Ohm
Sd	0,1134 sq.mt. (175,7 sq.in.)
Qms	8
Qes	0,28
Qts	0,27
Vas	268 lt. (9,47 cuft)
Mms	142 gr. (0,31 lb)
BL	23,6 Tm
Linear Mathematical Xmax (6)	± 9 mm (±0,35 in)
le (1kHz)	2,73 mH
Ref. Efficiency 1W@1m (half space)	98 dB

MOUNTING INFORMATION

Overall diameter	462 mm (18,18 in)
N. of mounting holes and bolt	8
Mounting holes diameter	8,5 mm (0,33 in)
Bolt circle diameter	438-440 mm (17,24-17,32 in)
Front mount baffle cutout Ø	416 mm (16,38 in)
Rear mount baffle cutout Ø	412 mm (16,22 in)
Total depth	207,9 mm (8,18 in)
Flange and gasket thickness	19 mm (0,75 in)
Net weight	13 kg (28,7 lb)
Shipping weight	14,7 kg (32,45 lb)
CardBoard Packaging dimensions	482 x 482 x 257 mm (19 x 19 x 10,1 in)




FREQUENCY RESPONSE CURVE

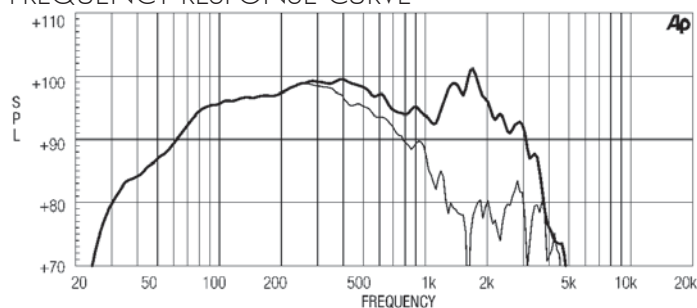

FREQUENCY RESPONSE CURVE OF 18LW1250 MADE ON 180 LIT. ENCLOSURE TUNED 35Hz IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

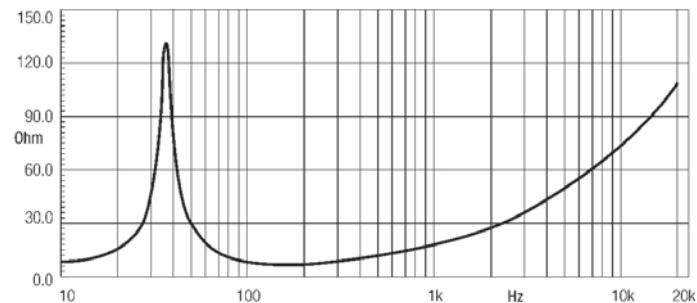

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- 1) AES power is determined according to AES2-1984 (r2003) standard
- 2) Program power rating is measured in 180 lit enclosure tuned 35Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- 3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- 4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- 5) Thiele - Small parameters are measured after the test specimen has been conditioned by 1000 W AES power and represent the expected long term parameters after a short period of use.
- 6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

18W2000

High Output LF Ferrite Transducer

99 dB SPL 1W / 1m average sensitivity
 100 mm (4 in) Interleaved Sandwich ISV copper voice coil
 1200 W AES power handling
 Double Silicon Spider (DSS) for improved excursion control and linearity
 Improved heat dissipation via unique basket design and multi-cell air diffractor
 Weather protected cone and plates for outdoor usage
 Suitable for high SPL subwoofer designs



GENERAL SPECIFICATIONS

Nominal Diameter	460 mm (18 in)
Rated Impedance	8 Ohm
AES Power (1)	1200 W
Program Power (2)	2400 W
Peak Power	7000 W
Sensitivity (3)	99 dB
Frequency Range (4)	37 - 3000 Hz
Power Compression @-10dB	0,5 dB
Power Compression @-3dB	1,5 dB
Power Compression @Full Power	2,2 dB
Max Recomm. Frequency	500 Hz
Recomm. Enclosure Volume	120 - 300 lt. (4,24 - 10,60 cuft)
Minimum Impedance	7,3 Ohm at 25°C
Max Peak To Peak Excursion	36 mm (1,42 in)


THIELE SMALL PARAMETERS (5)

Fs	37 Hz
Re	5,8 Ohm
Sd	0,1134 sq.mt. (175,7 sq.in.)
Qms	7,29
Qes	0,26
Qts	0,25
Vas	230 lt. (8,12 cuft)
Mms	143 gr. (0,32 lb)
BL	27,1 Tm
Linear Mathematical Xmax (6)	± 7 mm (±0,28 in)
le (1kHz)	1,90 mH
Ref. Efficiency 1W@1m (half space)	98,6 dB

MOUNTING INFORMATION


Overall diameter	462 mm (18,18 in)
N. of mounting holes and bolt	8
Mounting holes diameter	8,5 mm (0,33 in)
Bolt circle diameter	438-440 mm (17,24-17,32 in)
Front mount baffle cutout Ø	416 mm (16,38 in)
Rear mount baffle cutout Ø	412 mm (16,22 in)
Total depth	205,9 mm (8,1 in)
Flange and gasket thickness	19 mm (0,75 in)
Net weight	11,5 kg (26,35 lb)
Shipping weight	13 kg (28,66 lb)
CardBoard Packaging dimensions	482 x 482 x 257 mm (19 x 19 x 10,1 in)

FREQUENCY RESPONSE CURVE

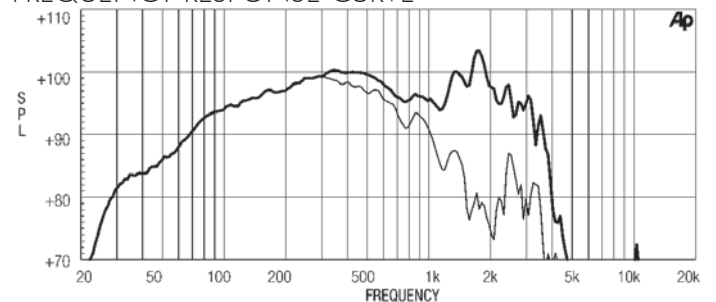

FREQUENCY RESPONSE CURVE OF 18W2000 MADE ON 180 LIT. ENCLOSURE TUNED 35Hz IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

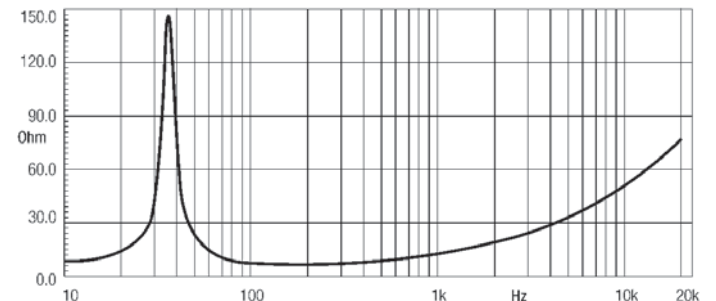

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 180 lit enclosure tuned 35Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.



15LW2400

Extended LF Ferrite Transducer


97 dB SPL 1W / 1m average sensitivity
100 mm (4 in) Interleaved Sandwich Voice coil (ISV)
2400 W program power handling
Weather protected fiberglass reinforced cellulose cone
Double Silicon Spider (DSS) for improved excursion control and linearity
Unlimited life lead wire construction
Improved heat dissipation via multi-cell air diffractor and multiple backplate vents
Suitable for 60 to 130 liters low bass or subwoofer applications



GENERAL SPECIFICATIONS

Nominal Diameter	380 mm (15 in)
Rated Impedance	8 Ohm
AES Power (1)	1200 W
Program Power (2)	2400 W
Peak Power	7000 W
Sensitivity (3)	97 dB
Frequency Range (4)	40 - 2200 Hz
Power Compression @10dB	0,7 dB
Power Compression @3dB	1,5 dB
Power Compression @Full Power	2,2 dB
Max Recomm. Frequency	500 Hz
Recomm. Enclosure Volume	60 - 130 lt. (2.12 - 4.59 cuft)
Max Peak To Peak Excursion	38 mm (1,53 in)
Voice Coil Diameter	100 mm (4 in)

FREQUENCY RESPONSE CURVE

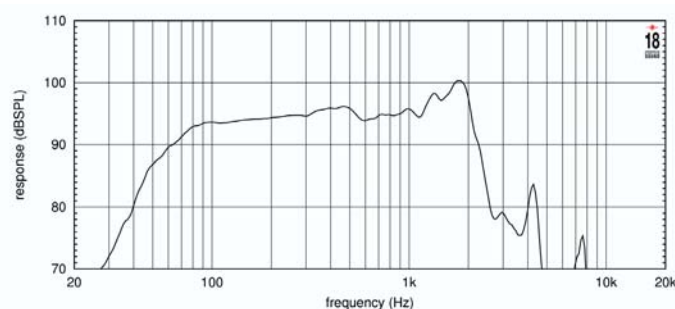


FREQUENCY RESPONSE CURVE OF 15LW2400 MADE ON 125 LIT. ENCLOSURE TUNED 50Hz IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

THIELE SMALL PARAMETERS (5)

Fs	40 Hz
Re	5,3 Ohm
Sd	0,090 sq.mt. (139,5 sq.in.)
Qms	4,75
Qes	0,32
Qts	0,3
Vas	131 lt. (4.63 cuft)
Mms	138 gr. (0,30 lb)
BL	24 Tm
Linear Mathematical Xmax (6)	± 10 mm (±0,39 in)
Le (1kHz)	1,25 mH
Ref. Efficiency 1W@1m (half space)	96,4 dB

FREE AIR IMPEDANCE MAGNITUDE CURVE

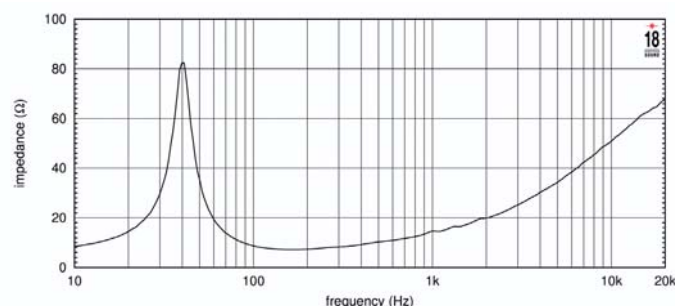

FREE AIR IMPEDANCE MAGNITUDE CURVE

MOUNTING INFORMATION

Overall diameter	393 mm (15.47 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	371 mm (14.6 in)
Front mount baffle cutout Ø	354mm (13.93 in)
Rear mount baffle cutout Ø	360 mm (14.17 in)
Total depth	181 mm (7.13 in)
Flange and gasket thickness	12,5 mm (0,49 in)
Flange and gasket thickness	12,5 mm (0,49 in)
Net weight	11,2 kg (24.7 lb)
Shipping weight	12,2 kg (26.9 lb)

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 125 lit enclosure tuned 50Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

15LW1401

Extended LF Ferrite Transducer

98 dB SPL 1W / 1m average sensitivity
 100 mm (4 in) Interleaved Sandwich Voice coil (ISV)
 1000 W AES power handling
 Carbon fiber reinforced cellulose cone
 Double Silicon Spider (DSS) for improved excursion control and linearity
 Improved heat dissipation via unique basket design
 Weather protected cone and plates for outdoor usage
 Suitable for low bass or subwoofer applications



GENERAL SPECIFICATIONS

Nominal Diameter	380 mm (15 in)
Rated Impedance	8 Ohm
AES Power (1)	1000 W
Program Power (2)	1400 W
Peak Power	7000 W
Sensitivity (3)	98 dB
Frequency Range (4)	40 - 2400 Hz
Power Compression @-10dB	0,8 dB
Power Compression @-3dB	2,1 dB
Power Compression @Full Power	3,0 dB
Max Recomm. Frequency	800 Hz
Recomm. Enclosure Volume	70 - 150 lt. (2,47 - 5,30 cuft)
Minimum Impedance	6,7 Ohm at 25°C
Max Peak To Peak Excursion	38 mm (1,53 in)


THIELE SMALL PARAMETERS (5)

Fs	42 Hz
Re	5 Ohm
Sd	0,090 sq.mt. (139,5 sq.in.)
Qms	5,36
Qes	0,28
Qts	0,27
Vas	131 lt. (4,63 cuft)
Mms	125 gr. (0,28 lb)
BL	24,2 Tm
Linear Mathematical Xmax (6)	± 9 mm (±0,35 in)
le (1kHz)	2,15 mH
Ref. Efficiency 1W@1m (half space)	97,4 dB

MOUNTING INFORMATION


Overall diameter	387 mm (15,23 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	370 - 371 mm (14,55 - 14,6 in)
Front mount baffle cutout Ø	353 mm (13,90 in)
Rear mount baffle cutout Ø	357 mm (14,06 in)
Total depth	163,4 mm (6,43 in)
Flange and gasket thickness	19,5 mm (0,76 in)
Net weight	12,4 kg (27,37 lb)
Shipping weight	13,4 kg (29,58 lb)
CardBoard Packaging dimensions	405 x 405 x 214 mm (15,94 x 15,94 x 8,43 in)

FREQUENCY RESPONSE CURVE

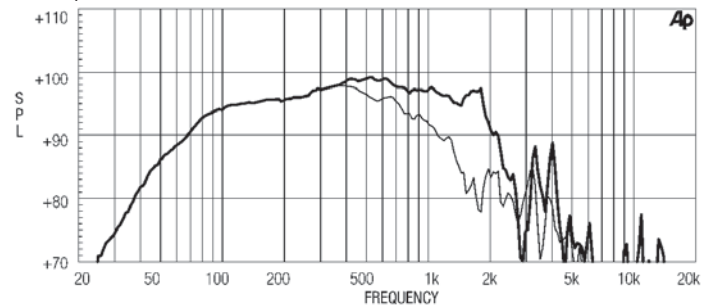

FREQUENCY RESPONSE CURVE OF 15LW1401 MADE ON 125 LIT. ENCLOSURE TUNED 50HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

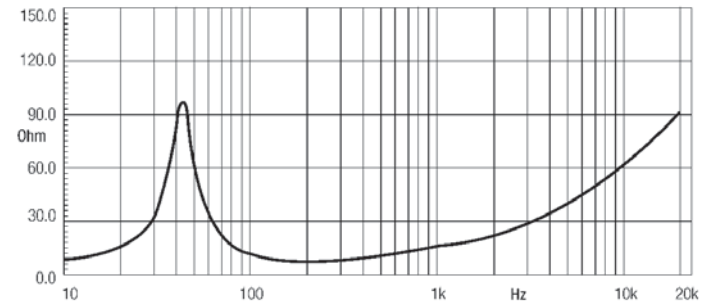

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 125 lit enclosure tuned 50Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 1000 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Mat. Xmax is calculated as; $(Hvc-Hg)/2 Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

High Output MB Ferrite Transducer


98 dB SPL 1W / 1m average sensitivity
 100 mm (4 in) Interleaved Sandwich Voice coil (ISV)
 850 W AES power handling
 Carbon fiber reinforced cellulose cone
 Copper shorting ring for linear impedance and reduced distortion figure
 Improved heat dissipation via unique basket design
 Weather protected cone and plates for outdoor usage
 Ideal for compact reflex enclosures, two-way systems and stage monitoring applications



GENERAL SPECIFICATIONS

Nominal Diameter	380 mm (15 in)
Rated Impedance	8 Ohm
AES Power (1)	850 W
Program Power (2)	1200 W
Peak Power	3000 W
Sensitivity (3)	98 dB
Frequency Range (4)	45 - 5100 Hz
Power Compression @10dB	0,9 dB
Power Compression @3dB	2,1 dB
Power Compression @Full Power	3,8 dB
Max Recomm. Frequency	1200 Hz
Recomm. Enclosure Volume	70 - 150 lt. (2,47 - 5,3 cuft)
Minimum Impedance	6 Ohm at 25°C
Max Peak To Peak Excursion	39 mm (1,53 in)

FREQUENCY RESPONSE CURVE

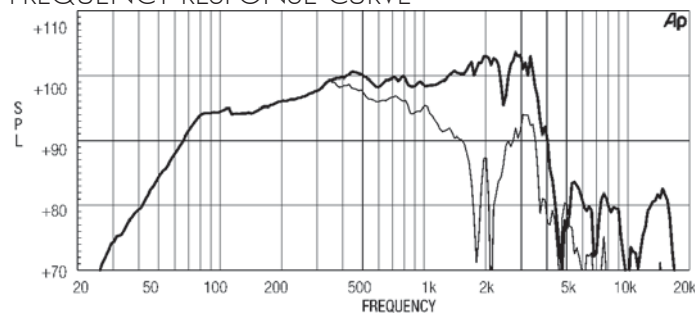


FREQUENCY RESPONSE CURVE OF 15MB1000 MADE ON 125 lit. ENCLOSURE TUNED 50Hz IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

THIELE SMALL PARAMETERS (5)

Fs	48 Hz
Re	5,5 Ohm
Sd	0,0855 sq.mt. (132,5 sq.in.)
Qms	6
Qes	0,32
Qts	0,31
Vas	132,5 lt. (4,66 cuft)
Mms	85 gr. (0,19 lb)
BL	21 Tm
Linear Mathematical Xmax (6)	± 6 mm (±0,24 in)
Le (1kHz)	1,5 mH
Ref. Efficiency 1W@1m (half space)	98,4 dB

FREE AIR IMPEDANCE MAGNITUDE CURVE

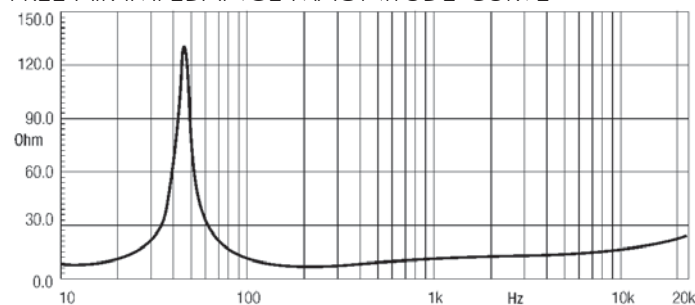

FREE AIR IMPEDANCE MAGNITUDE CURVE

MOUNTING INFORMATION

Overall diameter	387 mm (15,23 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	370 - 371 mm (14,55 - 14,6 in)
Front mount baffle cutout Ø	353 mm (13,90 in)
Rear mount baffle cutout Ø	357 mm (14,06 in)
Total depth	156,4 mm (6,16 in)
Flange and gasket thickness	19,5 mm (0,76 in)
Net weight	12,4 kg (27,37 lb)
Shipping weight	13,4 kg (29,58 lb)
CardBoard Packaging dimensions	405 x 405 x 214 mm (15,94 x 15,94 x 8,43 in)

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 125 lit enclosure tuned 50Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 850 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

15W930

Extended LF Ferrite Transducer

98 dB SPL 1W / 1m average sensitivity
 75 mm (3 in) edgewound copper voice coil
 800 W program power handling
 Aluminum demodulating ring (SDR)
 Long excursion, linear travel suspension design
 Humidity resistant cone and treated plates for outdoor usage
 Ideal for high loading compact subwoofer applications and two way systems

GENERAL SPECIFICATIONS

Nominal Diameter	380 mm (15 in)
Rated Impedance	8 Ohm
AES Power (1)	500 W
Program Power (2)	800 W
Peak Power	1600 W
Sensitivity (3)	98 dB
Frequency Range (4)	50 - 3600 Hz
Power Compression @-10dB	0,6 dB
Power Compression @-3dB	1,9 dB
Power Compression @Full Power	2,8 dB
Max Recomm. Frequency	1700 Hz
Recomm. Enclosure Volume	60 - 140 lt. (2,12 - 4,95 cuft)
Minimum Impedance	7,2 ohm at 25°C
Max Peak To Peak Excursion	33 mm (1,30 in)

THIELE SMALL PARAMETERS (5)


Fs	33 Hz
Re	5,5 Ohm
Sd	0,086 sq.mt. (132.53 sq.in.)
Qms	8,78
Qes	0,23
Qts	0,22
Vas	240 lt. (8,46 cuft)
Mms	97 gr. (0,21 lb)
BL	22,1 Tm
Linear Mathematical Xmax (6)	± 7,5 mm (± 0,30 in)
le (1kHz)	1,47 mH
Ref. Efficiency 1W@1m (half space)	97,9 dB

MOUNTING INFORMATION

Overall diameter	393 mm (15,47 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	371 mm (14,6 in)
Front mount baffle cutout Ø	360 mm (14,17 in)
Rear mount baffle cutout Ø	354 mm (13,94 in)
Total depth	185 mm (7,28 in)
Flange and gasket thickness	14 mm (0,55 in)
Net weight	7,6 kg (16,7 lb)
Shipping weight	8,5 kg (18,7 lb)
CardBoard Packaging dimensions	405 x 405 x 252 mm (15,94 x 15,94 x 9,92 in)




FREQUENCY RESPONSE CURVE

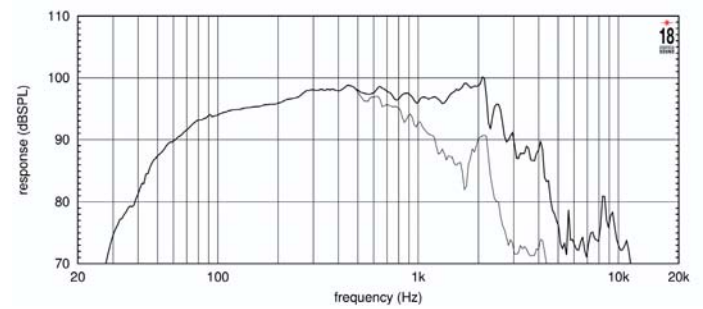

FREQUENCY RESPONSE CURVE MADE ON 125 LIT. ENCLOSURE TUNED 50HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

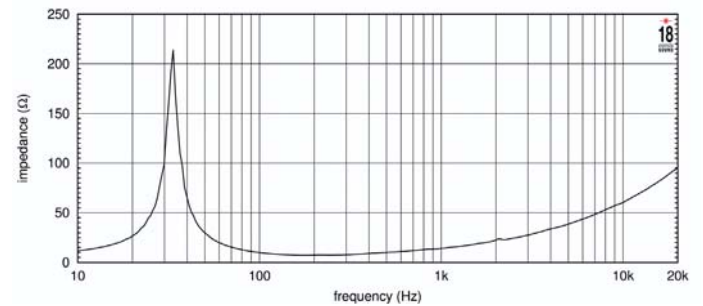

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 125 lit enclosure tuned 50Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 1 hour 20 Hz sine and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

LF Ferrite Transducer

97 dB SPL 1W / 1m average sensitivity
 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
 1200 W program power handling
 Long excursion, linear travel suspension design
 Weather protected cone and plates for outdoor usage
 Generous low frequency output make it suitable for 2-way systems and subwoofer applications

GENERAL SPECIFICATIONS

Nominal Diameter	380 mm (15 in)
Rated Impedance	8 Ohm
AES Power (1)	600 W
Program Power (2)	1200 W
Peak Power	2500 W
Sensitivity (3)	97 dB
Frequency Range (4)	50 - 4300 Hz
Power Compression @-10dB	1,0 dB
Power Compression @-3dB	2,8 dB
Power Compression @Full Power	4,0 dB
Max Recomm. Frequency	1800 Hz
Recomm. Enclosure Volume	80 - 140 lt. (2,82 - 4,95 cuft)
Minimum Impedance	6,1 Ohm at 25°C
Max Peak To Peak Excursion	38 mm (1,50 in)

THIELE SMALL PARAMETERS (5)


Fs	39 Hz
Re	5,1 Ohm
Sd	0,091 sq.mt. (141,05 sq.in.)
Qms	9,34
Qes	0,39
Qts	0,37
Vas	218 lt. (7,70 cuft)
Mms	88 gr. (0,19 lb)
BL	17,6 Tm
Linear Mathematical Xmax (6)	± 8 mm (± 0,31 in)
Le (1kHz)	1,10 mH
Ref. Efficiency 1W@1m (half space)	97,2 dB

MOUNTING INFORMATION

Overall diameter	393 mm (15,47 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	371 mm (14,6 in)
Front mount baffle cutout Ø	354 mm (13,94 in)
Rear mount baffle cutout Ø	357 mm (14,06 in)
Total depth	184,5 mm (7,26 in)
Flange and gasket thickness	13,5 mm (0,53 in)
Net weight	7,6 kg (16,7 lb)
Shipping weight	8,5 kg (18,7 lb)
CardBoard Packaging dimensions	405 x 405 x 252 mm (15,94 x 15,94 x 9,92 in)




FREQUENCY RESPONSE CURVE

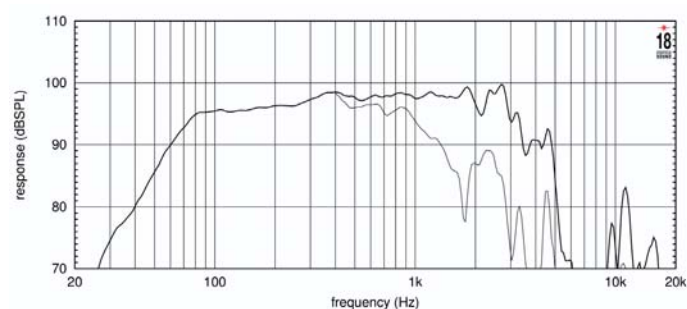

FREQUENCY RESPONSE CURVE OF 15W750 MADE ON 125 LIT. ENCLOSURE TUNED 50HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

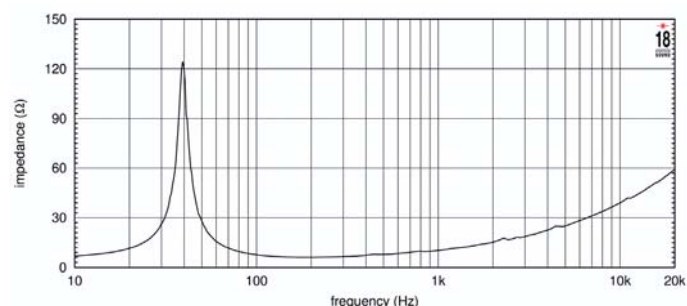

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 125 lit enclosure tuned 50Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

15W700

LF Ferrite Transducer

99 dB SPL 1W / 1m average sensitivity
 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
 450 W AES power handling
 Weather protected cone and plates for outdoor usage
 Excellent transient response
 Improved heat dissipation via unique basket design
 Ideal for compact reflex subwoofers and multiway systems

GENERAL SPECIFICATIONS

Nominal Diameter	380 mm (15 in)
Rated Impedance	8 Ohm
AES Power (1)	450 W
Program Power (2)	700 W
Peak Power	1500 W
Sensitivity (3)	99 dB
Frequency Range (4)	38 - 5000 Hz
Power Compression @-10dB	0,7 dB
Power Compression @-3dB	2,3 dB
Power Compression @Full Power	3,4 dB
Max Recomm. Frequency	2000 Hz
Recomm. Enclosure Volume	80 - 140 lt. (2,82 - 4,95 cuft)
Minimum Impedance	6,8 Ohm at 25°C
Max Peak To Peak Excursion	35 mm (1,38 in)

THIELE SMALL PARAMETERS (5)


Fs	38 Hz
Re	5,7 Ohm
Sd	0,085 sq.mt. (131,75 sq.in.)
Qms	3,8
Qes	0,33
Qts	0,3
Vas	217 lt. (7,67 cuft)
Mms	80 gr. (0,18 lb)
BL	18,4 Tm
Linear Mathematical Xmax (6)	± 6,5 mm (± 0,26 in)
le (1kHz)	1,57 mH
Ref. Efficiency 1W@1m (half space)	97,8 dB

MOUNTING INFORMATION

Overall diameter	387 mm (15,23 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	370 - 371 mm (14,55 - 14,6 in)
Front mount baffle cutout Ø	353 mm (13,90 in)
Rear mount baffle cutout Ø	357 mm (14,06 in)
Total depth	168,5 mm (6,63 in)
Flange and gasket thickness	19,5 mm (0,76 in)
Net weight	8,6 kg (18,98 lb)
Shipping weight	9,7 kg (21,41 lb)
CardBoard Packaging dimensions	405 x 405 x 214 mm (15,94 x 15,94 x 8,43 in)




FREQUENCY RESPONSE CURVE

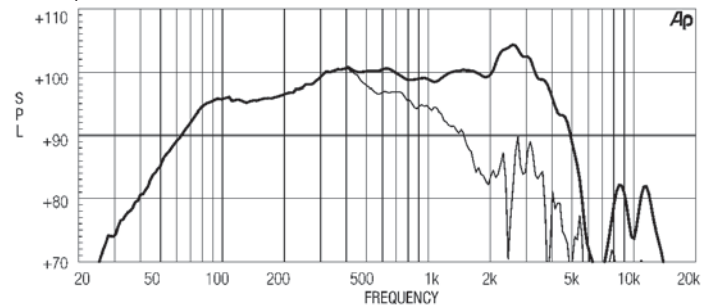

FREQUENCY RESPONSE CURVE OF 15W700 MADE ON 125 LIT. ENCLOSURE TUNED 50HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

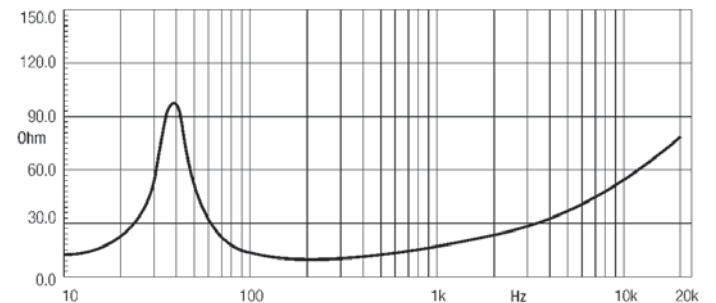

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 125 lit enclosure tuned 50Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 450 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.



15MB700

Very High Output MB Ferrite Transducer

103 dB SPL 1W / 1m average sensitivity
75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
400 W AES power handling
Excellent transient response
Additional cone damping treatment
Improved heat dissipation via unique basket design
Suitable for compact two way, multiway and horn loaded midbass applications



GENERAL SPECIFICATIONS

Nominal Diameter	380 mm (15 in)
Rated Impedance	8 Ohm
AES Power (1)	400 W
Program Power (2)	600 W
Peak Power	1200 W
Sensitivity (3)	103 dB
Frequency Range (4)	45 - 4300 Hz
Power Compression @-10dB	0,6 dB
Power Compression @-3dB	2,0 dB
Power Compression @Full Power	3,3 dB
Max Recomm. Frequency	3000 Hz
Recomm. Enclosure Volume	75 - 130 lt. (2,65 - 4,6 cuft)
Minimum Impedance	5,9 Ohm at 25°C
Max Peak To Peak Excursion	23 mm (0,88 in)


THIELE SMALL PARAMETERS (5)

Fs	42 Hz
Re	5 Ohm
Sd	0,085 sq.mt. (131,75 sq.in.)
Qms	4,6
Qes	0,31
Qts	0,29
Vas	202 lt. (7,14 cuft)
Mms	73 gr. (0,16 lb)
BL	17,6 Tm
Linear Mathematical Xmax (6)	± 5,5 mm (± 0,22 in)
le (1kHz)	1,2 mH
Ref. Efficiency 1W@1m (half space)	98,9 dB

MOUNTING INFORMATION


Overall diameter	387 mm (15,23 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	370 - 371 mm (14,55 - 14,6 in)
Front mount baffle cutout Ø	353 mm (13,90 in)
Rear mount baffle cutout Ø	357 mm (14,06 in)
Total depth	167,5 mm (6,59 in)
Flange and gasket thickness	19,5 mm (0,76 in)
Net weight	8,3 kg (18,3 lb)
Shipping weight	9,4 kg (20,75 lb)
CardBoard Packaging dimensions	405 x 405 x 214 mm (15,94 x 15,94 x 8,43 in)

FREQUENCY RESPONSE CURVE

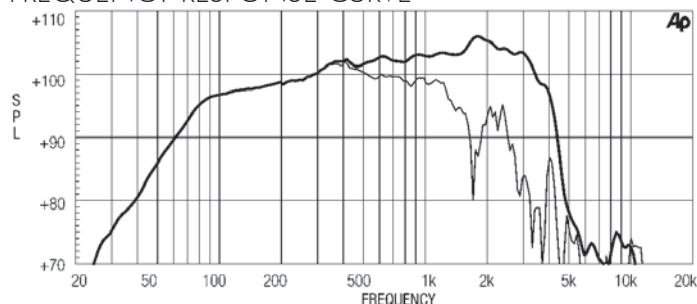

FREQUENCY RESPONSE CURVE OF 15MB700 MADE ON 125 LIT. ENCLOSURE TUNED 50HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

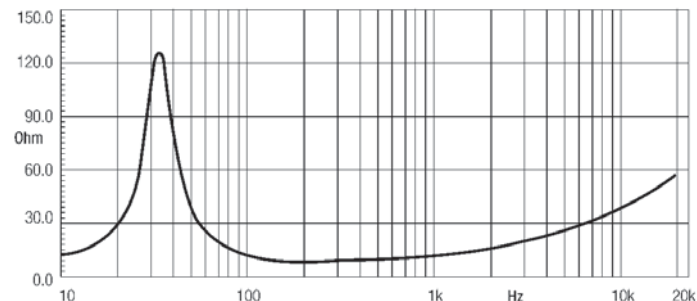

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- 1) AES power is determined according to AES2-1984 (r2003) standard
- 2) Program power rating is measured in 125 lit enclosure tuned 50Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- 3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- 4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- 5) Thiele - Small parameters are measured after the test specimen has been conditioned by 400 W AES power and represent the expected long term parameters after a short period of use.
- 6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

15MB606

Very High Output MB Ferrite Transducer

101 dB SPL 1W / 1m average sensitivity
 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
 400 W AES power handling
 Excellent transient response and cone damping
 Improved heat dissipation via unique basket design
 Ideal for compact two way and multiway systems

GENERAL SPECIFICATIONS

Nominal Diameter	380 mm (15 in)
Rated Impedance	8 Ohm
AES Power (1)	400 W
Program Power (2)	600 W
Peak Power	1200 W
Sensitivity (3)	101 dB
Frequency Range (4)	45 - 4800 Hz
Power Compression @-10dB	0,6 dB
Power Compression @-3dB	2,0 dB
Power Compression @Full Power	3,6 dB
Max Recomm. Frequency	2000 Hz
Recomm. Enclosure Volume	80 - 140 lt. (2,85 - 5 cuft)
Minimum Impedance	5,8 Ohm at 25°C
Max Peak To Peak Excursion	23 mm (0,88 in)

THIELE SMALL PARAMETERS (5)


Fs	43 Hz
Re	5 Ohm
Sd	0,085 sq.mt. (131,75 sq.in.)
Qms	6,2
Qes	0,37
Qts	0,35
Vas	223 lt. (7,88 cuft)
Mms	63 gr. (0,14 lb)
BL	15,1 Tm
Linear Mathematical Xmax (6)	± 4,5 mm (± 0,18 in)
Le (1 kHz)	1,3 mH
Ref. Efficiency 1W@1m (half space)	98,8 dB

MOUNTING INFORMATION

Overall diameter	387 mm (15,23 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	370 - 371 mm (14,55 - 14,6 in)
Front mount baffle cutout Ø	353 mm (13,90 in)
Rear mount baffle cutout Ø	357 mm (14,06 in)
Total depth	171,5 mm (6,75 in)
Flange and gasket thickness	19,5 mm (0,76 in)
Net weight	6,9 kg (15,23 lb)
Shipping weight	8 kg (17,66 lb)
CardBoard Packaging dimensions	405 x 405 x 214 mm (15,94 x 15,94 x 8,43 in)




FREQUENCY RESPONSE CURVE

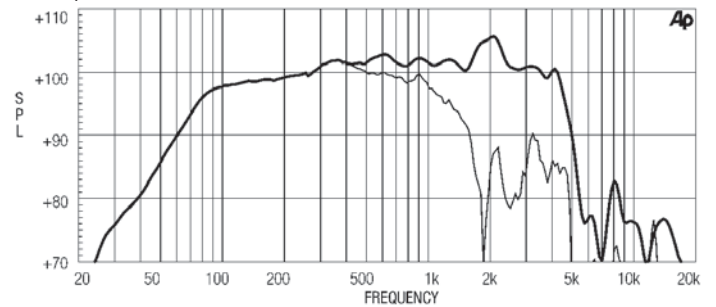

FREQUENCY RESPONSE CURVE OF 15MB606 MADE ON 125 LT. ENCLOSURE TUNED 50HZ IN FREE FIELD (API) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

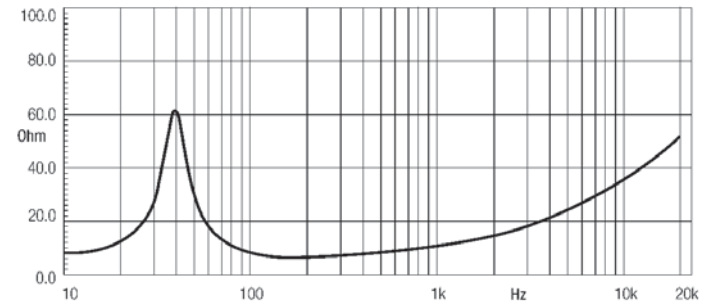

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 125 lit enclosure tuned 50Hz using a 50 -2000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 400 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

LF Ferrite Transducer

100,5dB SPL 1W / 1m average sensitivity
 65 mm (2,5 in) Interleaved Sandwich Voice coil (ISV)
 350 W AES power handling
 Excellent transient response and cone damping
 Improved heat dissipation via unique basket design
 Ideal for compact two way and multiway systems

GENERAL SPECIFICATIONS

Nominal Diameter	380 mm (15 in)
Rated Impedance	8 Ohm
AES Power (1)	350 W
Program Power (2)	500 W
Peak Power	1000 W
Sensitivity (3)	100,5 dB
Frequency Range (4)	50 - 4500 Hz
Power Compression @-10dB	0,7 dB
Power Compression @-3dB	2,5 dB
Power Compression @Full power	4,0 dB
Max Recomm. Frequency	3000 Hz
Recomm. Enclosure Volume	80 - 200 lt. (2,47 - 5,3 cuft)
Minimum Impedance	6 Ohm at 25°C
Max Peak To Peak Excursion	23 mm (0,88 in)

THIELE SMALL PARAMETERS (5)


Fs	50 Hz
Re	5,2 Ohm
Sd	0,085 sq.mt. (131,75 sq.in.)
Qms	9,64
Qes	0,55
Qts	0,52
Vas	189 lt. (6,68 cuft)
Mms	55 gr. (0,12 lb)
BL	12,6 Tm
Linear Mathematical Xmax (6)	± 4 mm (±0,16 in)
Le (1 kHz)	1,04 mH
Ref. Efficiency 1W@1m (half space)	98,2 dB

MOUNTING INFORMATION

Overall diameter	387 mm (15,23 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	370 - 371 mm (14,55 - 14,6 in)
Front mount baffle cutout Ø	353 mm (13,90 in)
Rear mount baffle cutout Ø	357 mm (14,06 in)
Total depth	161 mm (6,33 in)
Flange and gasket thickness	11,5 mm (0,45 in)
Net weight	4,3 kg (9,4 lb)
Shipping weight	5,1 kg (11,2 lb)
CardBoard Packaging dimensions	405 x 405 x 214 mm (15,94 x 15,94 x 8,43 in)




FREQUENCY RESPONSE CURVE

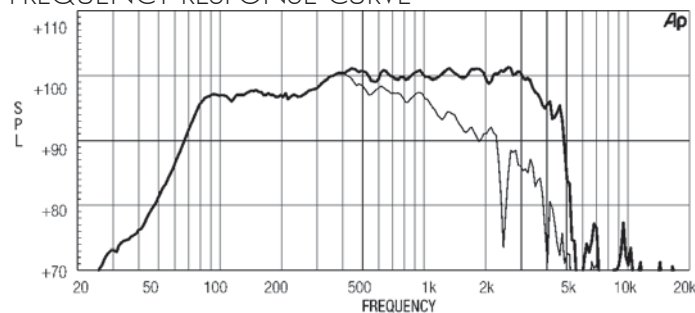

FREQUENCY RESPONSE CURVE OF 15W500 MADE ON 125 LIT. ENCLOSURE TUNED 50HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

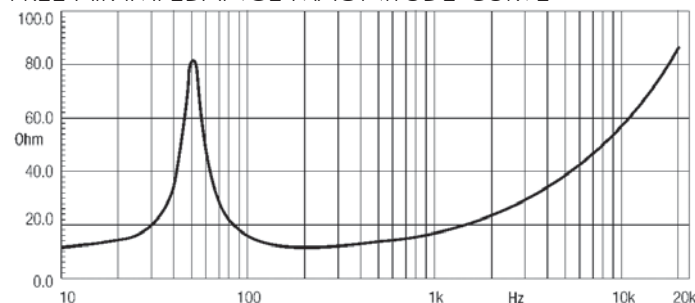

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 125 lit enclosure tuned 50Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83 V sinewave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 350W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2$ where Hvc is the coil depth and Hg is the gap depth.

12LW1400

Extended LF Ferrite Transducer

96 dB SPL 1W / 1m average sensitivity
 100 mm (4 in) Interleaved Sandwich Voice coil (ISV)
 900 W AES power handling
 Double Silicon Spider (DSS) for improved excursion control and linearity
 Double Demodulating Ring (DDR) for lower distortion
 Improved heat dissipation via unique basket design
 Weather protected cone and plates for outdoor usage
 Specially designed for high loading compact subwoofers

GENERAL SPECIFICATIONS

Nominal Diameter	300 mm (12 in)
Rated Impedance	8 Ohm
AES Power (1)	900W
Program Power (2)	1400 W
Peak Power	6000 W
Sensitivity (3)	96 dB
Frequency Range (4)	51 - 4000 Hz
Power Compression @-10dB	0,5 dB
Power Compression @-3dB	2,2 dB
Power Compression @Full power	3 dB
Max Recomm. Frequency	1000 Hz
Recomm. Enclosure Volume	30 - 60 lt. (1,06 - 2,12 cuft)
Minimum Impedance	6,8 Ohm at 25°C
Max Peak To Peak Excursion	36 mm (1,4 in)

THIELE SMALL PARAMETERS (5)


Fs	45 Hz
Re	5,2 Ohm
Sd	0,053 sq.mt. (82,15 sq.in.)
Qms	5
Qes	0,32
Qts	0,3
Vas	55 lt. (1,94 cuft)
Mms	88 gr. (0,19 lb)
BL	20 Tm
Linear Mathematical Xmax (6)	± 8,25 mm (± 0,32 in)
le (1kHz)	1,5 mH
Ref. Efficiency 1W@1m (half space)	1,5% (94 dB)

MOUNTING INFORMATION


Overall diameter	315 mm (12,4 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	296 - 300 mm (11,65 - 11,8 in)
Front mount baffle cutout Ø	282 mm (11,1 in)
Rear mount baffle cutout Ø	282 mm (11,1 in)
Total depth	141 mm (5,55 in)
Flange and gasket thickness	17,5 mm (0,69 in)
Net weight	10,9 kg (26,5 lb)
Shipping weight	11,5 kg (27,8 lb)
CardBoard Packaging dimensions	332 x 332 x 184 mm (13,07 x 13,07 x 7,24 in)



FREQUENCY RESPONSE CURVE

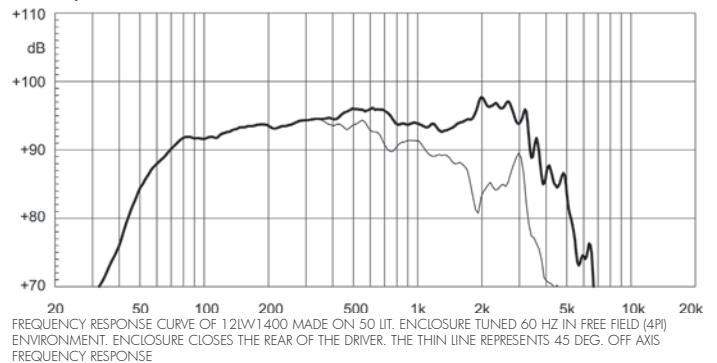

FREE AIR IMPEDANCE MAGNITUDE CURVE

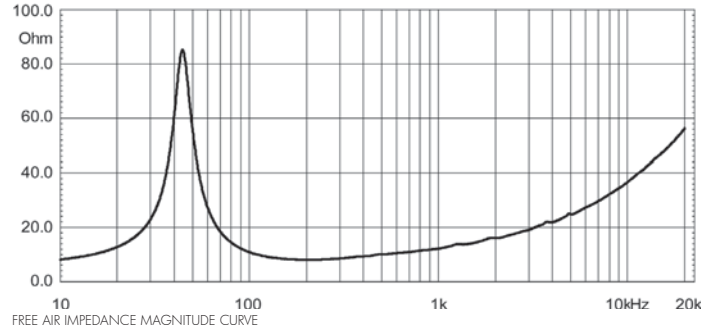

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 50 lit enclosure tuned 60Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83 V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upperlimits where the output level drops by 10 dB below the rated sensitivity in half spaceenvironment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 900 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2Hg/4$ where Hvc is the coil depth and Hg is the gap depth.



12MB1000

High Output MB Ferrite Transducer

102 dB SPL 1W / 1m average sensitivity

100 mm (4 in) Interleaved Sandwich ISV copper voice coil

600 W AES power handling

Excellent transient response

Very low power compression

Improved heat dissipation via unique basket design

Ideal for direct radiating or horn loaded midbass systems



GENERAL SPECIFICATIONS

Nominal Diameter	300 mm (12 in)
Rated Impedance	8 Ohm
AES Power (1)	600 W
Program Power (2)	800 W
Peak Power	1600 W
Sensitivity (3)	102 dB
Frequency Range (4)	80 - 3500 Hz
Power Compression @10dB	0,5 dB
Power Compression @3dB	1,5 dB
Power Compression @Full Power	2,1 dB
Max Recomm. Frequency	2500 Hz
Recomm. Enclosure Volume	8 - 60 lt. (0,28 - 2,12 cuft)
Minimum Impedance	7,2 Ohm at 25°C
Max Peak To Peak Excursion	20 mm (0,79 in)


THIELE SMALL PARAMETERS (5)

Fs	54 Hz
Re	5,8 Ohm
Sd	0,0531 sq.mt. (82,31 sq.in.)
Qms	6
Qes	0,2
Qts	0,18
Vas	60 lt. (2,12 cuft)
Mms	55,5 gr. (0,12 lb)
BL	23,5 Tm
Linear Mathematical Xmax (6)	± 2,5mm (±0,10 in)
le (1kHz)	1,46 mH
Ref. Efficiency 1W@1m (half space)	99 dB

MOUNTING INFORMATION


Overall diameter	315 mm (12,4 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	296 - 300 mm (11,65 - 11,8 in)
Front mount baffle cutout Ø	282 mm (11,1 in)
Rear mount baffle cutout Ø	282 mm (11,1 in)
Total depth	118,4 mm (4,66 in)
Flange and gasket thickness	16,5 mm (0,65 in)
Net weight	9,6 kg (21,19 lb)
Shipping weight	10,3 kg (22,74 lb)
CardBoard Packaging dimensions	332 x 332 x 184 mm (13,07 x 13,07 x 7,24 in)

FREQUENCY RESPONSE CURVE

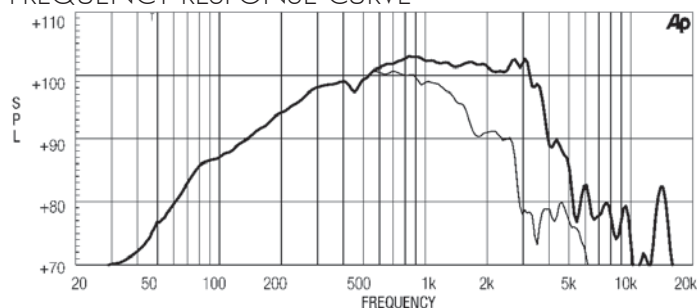

FREQUENCY RESPONSE CURVE OF 12MB1000 MADE ON 50 LT. CLOSED BOX ENCLOSURE IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

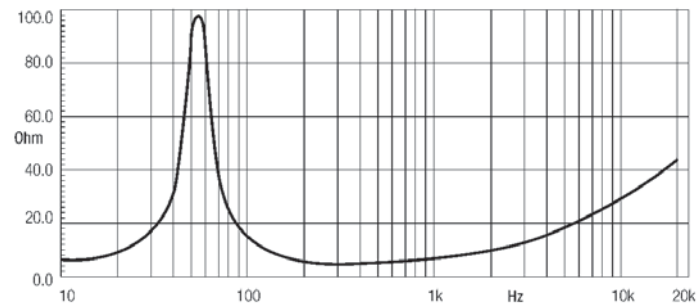

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Continuous power rating is measured in 50 lit closed box using a 60 - 2000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 600 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

12W750

LF Ferrite Transducer

97 dB SPL 1W / 1m average sensitivity
 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
 1200 W program power handling
 Long excursion, linear travel suspension design
 Weather protected cone and plates for outdoor use
 Generous low frequency output make it suitable for 2-way systems and subwoofer applications

GENERAL SPECIFICATIONS

Nominal Diameter	300 mm (12 in)
Rated Impedance	8 Ohm
AES Power (1)	600 W
Program Power (2)	1200 W
Peak Power	2500 W
Sensitivity (3)	97 dB
Frequency Range (4)	50 - 4600 Hz
Power Compression @-10dB	0,9 dB
Power Compression @-3dB	2,8 dB
Power Compression @Full Power	3,8 dB
Max Recomm. Frequency	1800 Hz
Recomm. Enclosure Volume	40 - 90 lt. (1,41 - 3,18 cuft)
Minimum Impedance	6,4 Ohm at 25°C
Max Peak To Peak Excursion	38 mm (1,50 in)

THIELE SMALL PARAMETERS (5)


Fs	49 Hz
Re	5,2 Ohm
Sd	0,0531 sq.mt. (82,31 sq.in.)
Qms	7,00
Qes	0,30
Qts	0,28
Vas	73 lt. (2,58 cuft)
Mms	57 gr. (0,13 lb)
BL	18 Tm
Linear Mathematical Xmax (6)	± 8 mm (± 0,31 in)
le (1kHz)	0,95 mH
Ref. Efficiency 1W@1m (half space)	96,6 dB

MOUNTING INFORMATION

Overall diameter	310 mm (12,2 in)
N. of mounting holes and bolt	8
Mounting holes diameter	5,90 mm (0,23 in)
Bolt circle diameter	295 mm (11,61 in)
Front mount baffle cutout Ø	280 mm (11,02 in)
Rear mount baffle cutout Ø	280 mm (11,02 in)
Total depth	148 mm (5,83 in)
Flange and gasket thickness	13,5 mm (0,53 in)
Net weight	7,5 kg (16,5 lb)
Shipping weight	8,3 kg (18,26 lb)
CardBoard Packaging dimensions	332 x 332 x 184 mm (13,07 x 13,07 x 7,24 in)




FREQUENCY RESPONSE CURVE

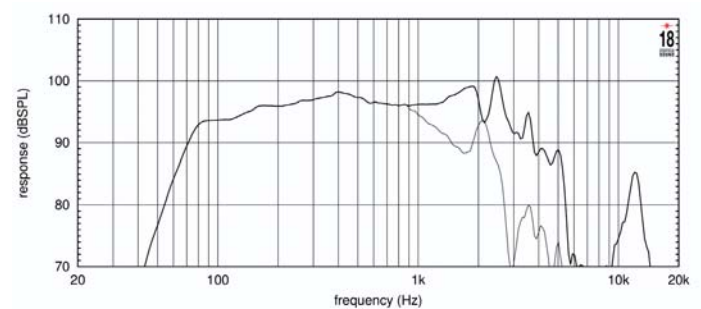

FREQUENCY RESPONSE CURVE OF 12W750 MADE ON 50 LIT. ENCLOSURE TUNED 60HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

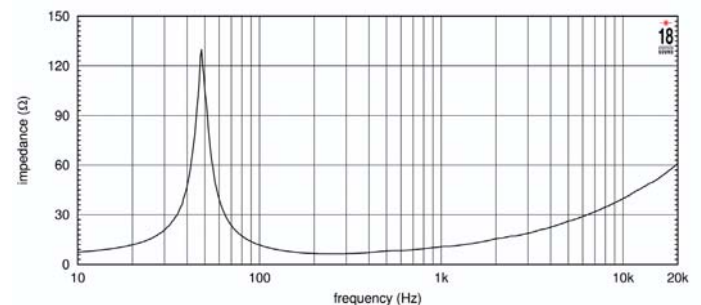

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 50 lit enclosure tuned 60Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.



12W700

LF Ferrite Transducer

98 dB SPL 1W / 1m average sensitivity
 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
 450 W AES power handling
 Excellent transient response
 Weather protected cone and plates for outdoor usage
 Improved heat dissipation via unique basket design
 Ideal for compact two way, multiway systems and subwoofer applications

GENERAL SPECIFICATIONS

Nominal Diameter	300 mm (12 in)
Rated Impedance	8 Ohm
AES Power (1)	450 W
Program Power (2)	700 W
Peak Power	1500 W
Sensitivity (3)	98 dB
Frequency Range (4)	55 - 4200 Hz
Power Compression @-10dB	0,8 dB
Power Compression @-3dB	2,3 dB
Max Recomm. Frequency	1700 Hz
Recomm. Enclosure Volume	40 - 90 lt. (1,41 - 3,18 cuft)
Minimum Impedance	7 Ohm at 25°C
Max Peak To Peak Excursion	34 mm (1,34 in)
Voice Coil Diameter	75 mm (3 in)

THIELE SMALL PARAMETERS (5)


Fs	58 Hz
Re	5,7 Ohm
Sd	0,0531 sq.mt. (82,31 sq.in.)
Qms	3,93
Qes	0,37
Qts	0,36
Vas	55 lt. (1,94 cuft)
Mms	51 gr. (0,11 lb)
BL	17,7 Tm
Linear Mathematical Xmax (6)	± 6,5 mm (± 0,26 in)
Le (1kHz)	1,48 mH
Ref. Efficiency 1W@1m (half space)	97,2 dB

MOUNTING INFORMATION

Overall diameter	315 mm (12,4 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	296 - 300 mm (11,65 - 11,8 in)
Front mount baffle cutout Ø	282 mm (11,1 in)
Rear mount baffle cutout Ø	282 mm (11,1 in)
Total depth	147,5 mm (5,80 in)
Flange and gasket thickness	16,5 mm (0,65 in)
Net weight	8,2 kg (18,1 lb)
Shipping weight	9 kg (19,87 lb)
CardBoard Packaging dimensions	332 x 332 x 184 mm (13,07 x 13,07 x 7,24 in)




FREQUENCY RESPONSE CURVE

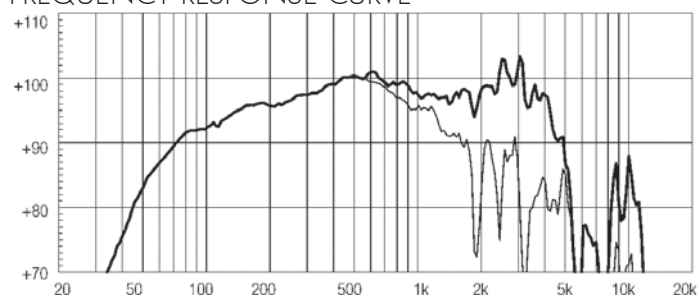

FREQUENCY RESPONSE CURVE OF 12W700 MADE ON 50 LIT. ENCLOSURE TUNED 60HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

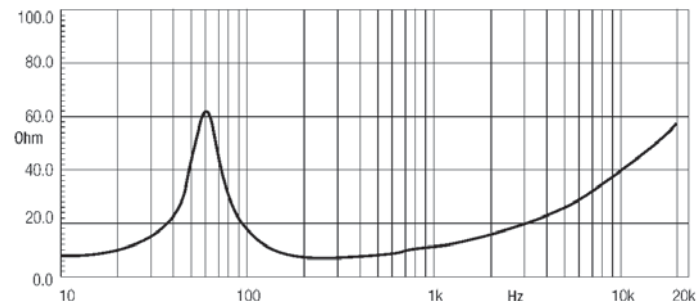

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Continuous power rating is measured in 50 lit enclosure tuned 60Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 450 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

12MB700

Very High Output MB Ferrite Transducer

101,5 dB SPL 1W / 1m sensitivity
 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
 450 W AES power handling
 Double Demodulating Rings (DDR) for lower distortion
 Improved heat dissipation via unique basket design
 Weather protected cone and plates for outdoor usage
 Ideal for compact two way and multiway systems

GENERAL SPECIFICATIONS

Nominal Diameter	300 mm (12 in)
Rated Impedance	8 Ohm
AES Power (1)	450 W
Program Power (2)	600 W
Peak Power	1200 W
Sensitivity (3)	101,5 dB
Frequency Range (4)	60 - 5000 Hz
Power Compression @-10dB	0,4 dB
Power Compression @-3dB	1,5 dB
Power Compression @Full Power	2,8 dB
Max Recomm. Frequency	4000 Hz
Recomm. Enclosure Volume	10 - 80 lt. (0,3 - 2,83 cuft)
Minimum Impedance	5,7 Ohm at 25°C
Max Peak To Peak Excursion	22 mm (0,87 in)

THIELE SMALL PARAMETERS (5)


Fs	49 Hz
Re	5 Ohm
Sd	0,0531 sq.mt. (82,31 sq.in.)
Qms	4,7
Qes	0,2
Qts	0,19
Vas	101 lt. (3,57 cuft)
Mms	41 gr. (0,09 lb) 101 lt. (3,57 cuft)
BL	17,8 Tm
Linear Mathematical Xmax (6)	± 4,5 mm (± 0,18 in)
Le (1kHz)	0,9 mH
Ref. Efficiency 1W@1m (half space)	99,6 dB

MOUNTING INFORMATION

Overall diameter	315 mm (12,4 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	296 - 300 mm (11,65 - 11,8 in)
Front mount baffle cutout Ø	282 mm (11,1 in)
Rear mount baffle cutout Ø	282 mm (11,1 in)
Total depth	147,5 mm (5,82 in)
Flange and gasket thickness	16,5 mm (0,65 in)
Net weight	8,0 kg (17,66 lb)
Shipping weight	8,8 kg (19,43 lb)
CardBoard Packaging dimensions	332 x 332 x 184 mm (13,07 x 13,07 x 7,24 in)




FREQUENCY RESPONSE CURVE

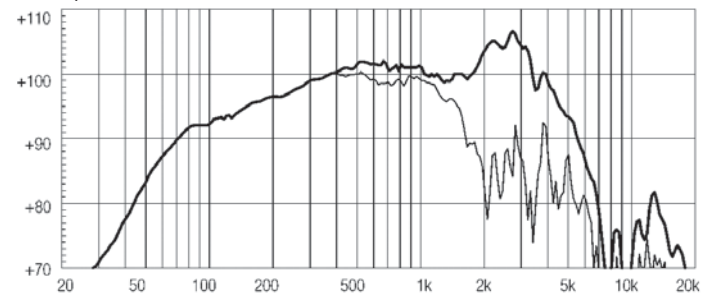

FREQUENCY RESPONSE CURVE OF 12MB700 MADE ON 50 LIT. ENCLOSURE TUNED 60HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

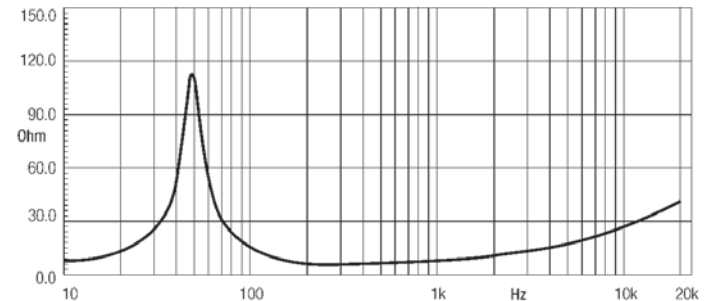

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Continuous power rating is measured in 50 lit enclosure tuned 60Hz using a 60 - 2000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 450 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2+Hg/4$ where Hvc is the coil depth and Hg is the gap depth.



12MB600

High Output MB Ferrite Transducer

101 dB SPL 1W / 1m average sensitivity
 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
 450 W AES power handling
 Weather protected cone and plates for outdoor usage
 Excellent transient response
 Improved heat dissipation via unique basket design
 Ideal for compact two way and multiway systems

GENERAL SPECIFICATIONS

Nominal Diameter	300 mm (12 in)
Rated Impedance	8 Ohm
AES Power (1)	450 W
Program Power (2)	600 W
Peak Power	1200 W
Sensitivity (3)	101 dB
Frequency Range (4)	58 - 5000 Hz
Power Compression @-10dB	0,5 dB
Power Compression @-3dB	1,6 dB
Power Compression @Full Power	3,0 dB
Max Recomm. Frequency	2200 Hz
Recomm. Enclosure Volume	30 - 80 lt. (1,06 - 2,83 cuft)
Minimum Impedance	6,5 Ohm at 25°C
Max Peak To Peak Excursion	22 mm (0,87 in)

THIELE SMALL PARAMETERS (5)


Fs	44 Hz
Re	5 Ohm
Sd	0,0531 sq.mt. (82,31 sq.in.)
Qms	3,9
Qes	0,19
Qts	0,18
Vas	115 lt. (4,06 cuft)
Mms	43 gr. (0,09 lb)
BL	18 Tm
Linear Mathematical Xmax (6)	± 4,5 mm (± 0,18 in)
le (1kHz)	1,32 mH
Ref. Efficiency 1W@1m (half space)	99,2 dB

MOUNTING INFORMATION

Overall diameter	315 mm (12,4 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	296 - 300 mm (11,65 - 11,8 in)
Front mount baffle cutout Ø	282 mm (11,1 in)
Rear mount baffle cutout Ø	282 mm (11,1 in)
Total depth	147,5 mm (5,82 in)
Flange and gasket thickness	16,5 mm (0,65 in)
Net weight	8,0 kg (17,66 lb)
Shipping weight	8,8 kg (19,43 lb)
CardBoard Packaging dimensions	332 x 332 x 184 mm (13,07 x 13,07 x 7,24 in)




FREQUENCY RESPONSE CURVE

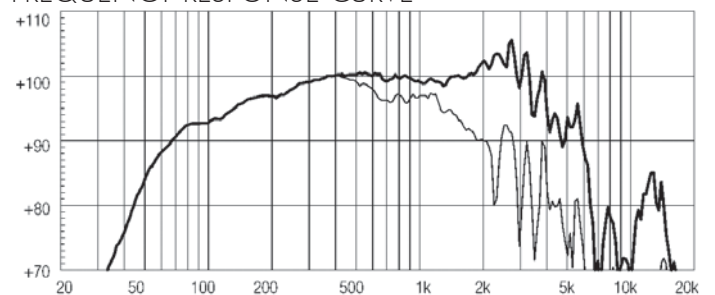

FREQUENCY RESPONSE CURVE OF 12MB600 MADE ON 50 LIT. ENCLOSURE TUNED 60HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

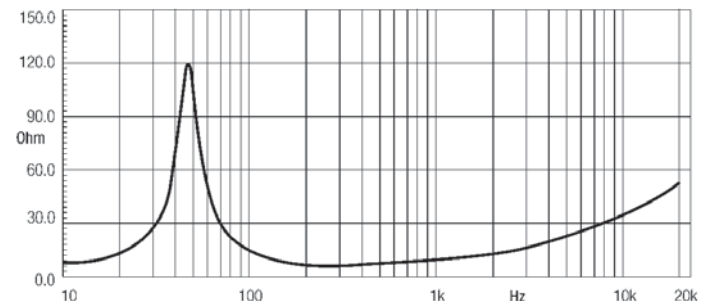

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 50 lit enclosure tuned 60Hz using a 60 - 2000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 450 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

12MB650

High Output MB Ferrite Transducer

98 dB SPL 1W / 1m sensitivity
 65 mm (2.5 in) Edgewound Aluminum Voice coil (EVAL)
 800W program power handling
 Improved heat dissipation via proprietary basket design
 Weather protected cone and plates for outdoor usage
 Ideal for high quality two way and stage monitor applications

GENERAL SPECIFICATIONS

Nominal Diameter	300 mm (12 in)
Rated Impedance	8 Ohm
AES Power (1)	400 W
Program Power (2)	800 W
Peak Power	1600 W
Sensitivity (3)	98 dB
Frequency Range (4)	45 - 5000 Hz
Power Compression @-10dB	0,7 dB
Power Compression @-3dB	1,5 dB
Power Compression @Full Power	2,2 dB
Max Recomm. Frequency	2000 Hz
Recomm. Enclosure Volume	70 - 150 lt. (2.47 - 5.30 cuft)
Minimum Impedance	7,2 Ohm at 25°C
Max Peak To Peak Excursion	24 mm (0,95 in)

THIELE SMALL PARAMETERS (5)


Fs	48 Hz
Re	6,0 Ohm
Sd	0,053 sq.mt. (82,15 sq.in.)
Qms	3,2
Qes	0,24
Qts	0,23
Vas	90 lt. (3.18 cuft)
Mms	48 gr. (0.11 lb)
BL	19 Tm
Linear Mathematical Xmax (6)	± 5,5 mm (± 0.22 in)
Le (1 kHz)	0,83 mH
Ref. Efficiency 1W@1m (half space)	98,1 dB

MOUNTING INFORMATION

Overall diameter	310 mm (12,2 in)
N. of mounting holes and bolt	8
Mounting holes diameter	5,9 mm (0,23 in)
Bolt circle diameter	295 mm (11.61 - 11,8 in)
Front mount baffle cutout Ø	280 mm (11,02 in)
Rear mount baffle cutout Ø	280 mm (11,02 in)
Total depth	143 mm (5.63 in)
Flange and gasket thickness	14 mm (0.55 in)
Net weight	6,8 kg (14.95 lb)
Shipping weight	7,5 kg (16.53 lb)
CardBoard Packaging dimensions	332 x 332 x 184 mm (13,07 x 13,07 x 7,24 in)




FREQUENCY RESPONSE CURVE

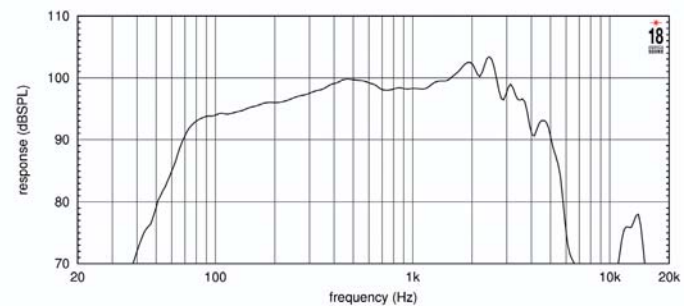

FREQUENCY RESPONSE CURVE MADE ON 50 LIT. ENCLOSURE TUNED 60HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

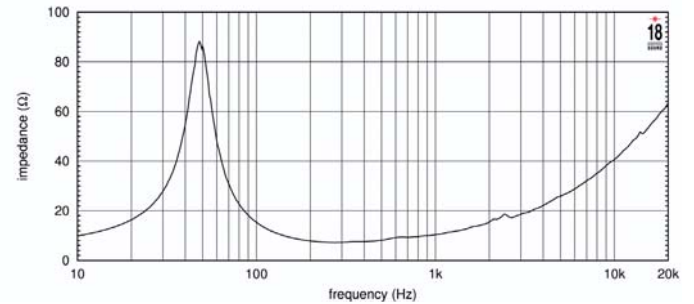

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 250 lit. enclosure tuned at 28 Hz using a 30-300 band limited pink noise test signal applied for 2 hours and with 50% duty cycle
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 450 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2+Hg/4$ where Hvc is the coil depth and Hg is the gap depth.



12W500

LF Ferrite Transducer

99,5 dB SPL 1W / 1m average sensitivity
65 mm (2,5 in) Interleaved Sandwich Voice coil (ISV)
350 W AES power handling
Excellent transient response
Improved heat dissipation via unique basket design
Ideal for compact two way systems

GENERAL SPECIFICATIONS

Nominal Diameter	300 mm (12 in)
Rated Impedance	8 Ohm
AES Power (1)	350 W
Program Power (2)	500 W
Peak Power	1000 W
Sensitivity (3)	99,5 dB
Frequency Range (4)	50 - 6000 Hz
Power Compression @-10dB	0,7 dB
Power Compression @-3dB	2,5 dB
Power Compression @Full Power	4,1 dB
Max Recomm. Frequency	2500 Hz
Recomm. Enclosure Volume	50 - 100 lt. (1,77 - 3,53 cuft)
Minimum Impedance	6,4 Ohm at 25°C
Max Peak To Peak Excursion	22 mm (0,87 in)

THIELE SMALL PARAMETERS (5)


Fs	46 Hz
Re	5,2 Ohm
Sd	0,0531 sq.mt. (82,31 sq.in.)
Qms	6,02
Qes	0,38
Qts	0,36
Vas	123 lt. (4,34 cuft)
Mms	36,5 gr. (0,08 lb)
BL	12,1 Tm
Linear Mathematical Xmax (6)	± 4 mm (±0,16 in)
Le (1 kHz)	1,12 mH
Ref. Efficiency 1W@1m (half space)	97,2 dB

MOUNTING INFORMATION

Overall diameter	315 mm (12,4 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	296 - 300 mm (11,65 - 11,8 in)
Front mount baffle cutout Ø	282 mm (11,1 in)
Rear mount baffle cutout Ø	282 mm (11,1 in)
Total depth	141 mm (5,55 in)
Flange and gasket thickness	16,5 mm (0,65 in)
Net weight	4,5 kg (9,93 lb)
Shipping weight	5,3 kg (11,7 lb)
CardBoard Packaging dimensions	332 x 332 x 184 mm (13,07 x 13,07 x 7,24 in)




FREQUENCY RESPONSE CURVE

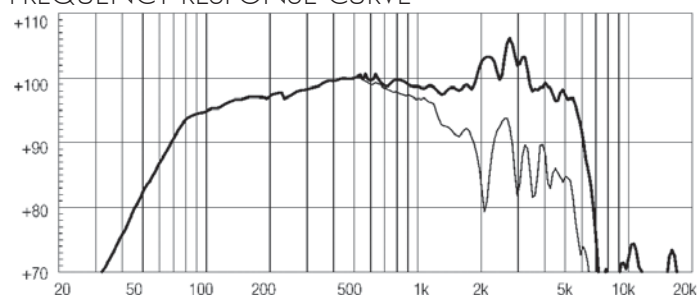

FREQUENCY RESPONSE CURVE OF 12W500 MADE ON 50 LIT. ENCLOSURE TUNED 60HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

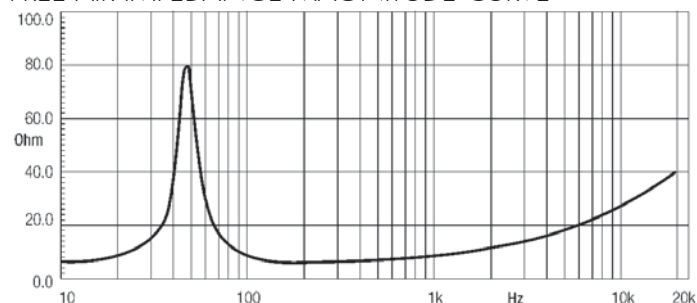

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 50 lit enclosure tuned 60Hz using a 55 - 2500Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 350 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(H_{vc}H_g)/2 + H_g/4$ where H_{vc} is the coil depth and H_g is the gap depth.

10MB600

High Output MB Ferrite Transducer

98 dB SPL 1W / 1m average sensitivity
 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
 450 W AES power handling
 Weather protected cone and plates for outdoor usage
 Excellent transient response
 Improved heat dissipation via unique basket design
 Ideal for compact two way and multiway systems



GENERAL SPECIFICATIONS

Nominal Diameter	260 mm (10 in)
Rated Impedance	8 Ohm
AES Power (1)	450 W
Program Power (2)	700 W
Peak Power	1500 W
Sensitivity (3)	98 dB
Frequency Range (4)	55 - 4500 Hz
Power Compression @-10dB	0,4 dB
Power Compression @-3dB	1,6 dB
Power Compression @Full Power	2,2 dB
Max Recomm. Frequency	2500 Hz
Recomm. Enclosure Volume	10 - 40 lt. (0,9 - 1,41 cuft)
Max Recomm. Frequency	2500 Hz
Max Peak To Peak Excursion	24 mm (0,94 in)


THIELE SMALL PARAMETERS (5)

Fs	58 Hz
Re	5,7 Ohm
Sd	0,035 sq.mt. (54,25 sq.in.)
Qms	5,5
Qes	0,23
Qts	0,22
Vas	33,4 lt. (1,18 cuft)
Mms	38 gr. (0,08 lb)
BL	18,6 Tm
Linear Mathematical Xmax (6)	± 6,5 mm (± 0,26 in)
Le (1kHz)	1,6 mH
Ref. Efficiency 1W@1m (half space)	96,5 dB

MOUNTING INFORMATION


Overall diameter	260 mm (10,24 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	244,5 mm (9,63 in)
Front mount baffle cutout Ø	232 mm (9,13 in)
Rear mount baffle cutout Ø	232 mm (9,13 in)
Total depth	127 mm (5 in)
Flange and gasket thickness	14,5 mm (0,57 in)
Flange and gasket thickness	14,5 mm (0,57 in)
Net weight	7,35 kg (16,23 lb)
Shipping weight	7,9 kg (17,44 lb)

FREQUENCY RESPONSE CURVE

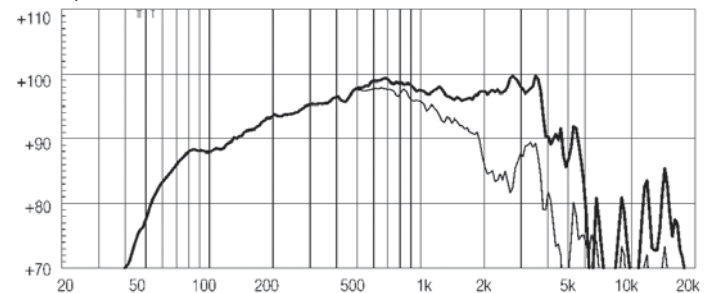

FREQUENCY RESPONSE CURVE OF 10MB600 MADE ON 30 LIT. ENCLOSURE TUNED AT 55HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

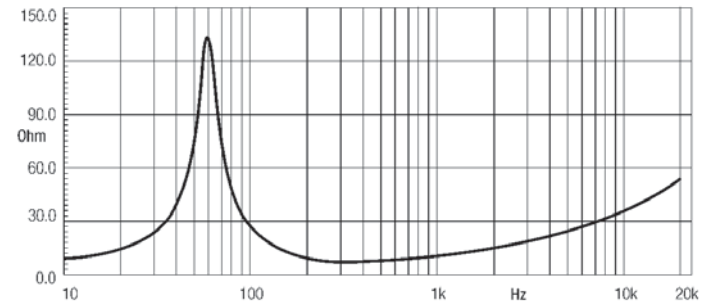

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 30 lit enclosure tuned 55Hz using a 70 - 2000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 450 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

FT 10M600

Very High Output MF Ferrite Transducer

102 dB SPL 1W / 1m average sensitivity
 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
 400 W AES power handling
 Excellent transient response
 Improved heat dissipation via unique basket design
 Ideal for direct radiating or horn loaded midrange systems

GENERAL SPECIFICATIONS

Nominal Diameter	260 mm (10 in)
Rated Impedance	8 Ohm
AES Power (1)	400 W
Program Power (2)	500 W
Peak Power	1200 W
Sensitivity (3)	102 dB
Frequency Range (4)	80 - 5200 Hz
Power Compression @-10dB	0,5 dB
Power Compression @-3dB	1,6 dB
Power Compression @Full Power	2,3 dB
Max Recomm. Frequency	3000 Hz
Recomm. Enclosure Volume	5 - 30 lt. (0,18 - 1,09 cuft)
Minimum Impedance	6,4 Ohm at 25°C
Max Peak To Peak Excursion	16 mm (0,63 in)

THIELE SMALL PARAMETERS (5)


Fs	70 Hz
Re	5,2 Ohm
Sd	0,035 sq.mt. (54,25 sq.in.)
Qms	4,5
Qes	0,25
Qts	0,23
Vas	25,6 lt. (0,9 cuft)
Mms	32 gr. (0,07 lb)
BL	17,6 Tm
Linear Mathematical Xmax (6)	± 4 mm (±0,16 in)
Le (1 kHz)	1,28 mH
Ref. Efficiency 1W@1m (half space)	97,7 dB

MOUNTING INFORMATION

Overall diameter	260 mm (10,24 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	244,5 mm (9,63 in)
Front mount baffle cutout Ø	232 mm (9,13 in)
Rear mount baffle cutout Ø	232 mm (9,13 in)
Total depth	126 mm (4,95 in)
Flange and gasket thickness	14,5 mm (0,57 in)
Net weight	7,35 kg (16,23 lb)
Shipping weight	7,8 kg (17,22 lb)
CardBoard Packaging dimensions	275 x 275 x 164 mm (10,83 x 10,83 x 6,46 in)




FREQUENCY RESPONSE CURVE

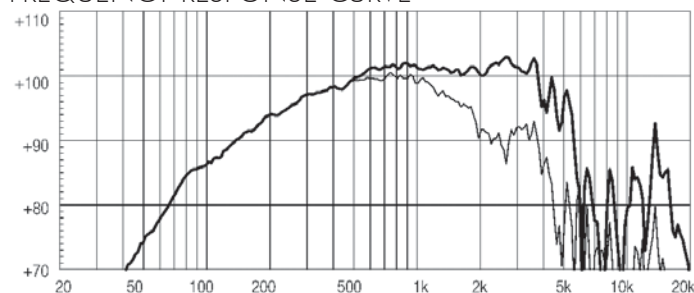

FREQUENCY RESPONSE CURVE OF 10M600 MADE ON 30 LIT. CLOSED ENCLOSURE IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

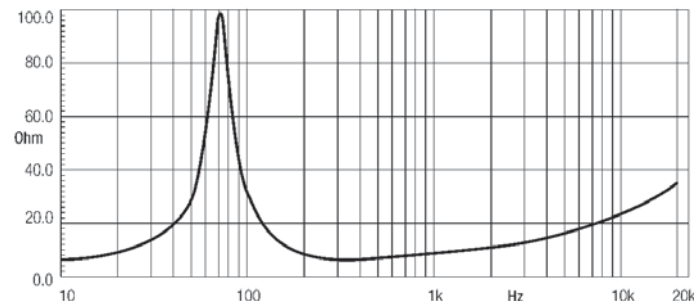

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 30 lit closed enclosure using a 70 - 2000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 400 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

10W500

LF Ferrite Transducer

98 dB SPL 1W / 1m average sensitivity
 51 mm (2 in) Interleaved Sandwich copper Voice coil (ISV)
 280 W AES power handling
 Improved heat dissipation via unique basket design
 Ideal for compact two way and multiway systems

GENERAL SPECIFICATIONS

Nominal Diameter	260 mm (10 in)
Rated Impedance	8 Ohm
AES Power (1)	280 W
Program Power (2)	400 W
Peak Power	800 W
Sensitivity (3)	98 dB
Frequency Range (4)	55 - 4500 Hz
Power Compression @10dB	0,7 dB
Power Compression @3dB	1,3 dB
Power Compression @Full Power	2,8 dB
Max Recomm. Frequency	2000 Hz
Recomm. Enclosure Volume	20 - 50 lt. (0,71 - 1,77 cuft)
Minimum Impedance	7 Ohm at 25°C
Max Peak To Peak Excursion	24 mm (0,94 in)

THIELE SMALL PARAMETERS (5)


Fs	53 Hz
Re	6,0 Ohm
Sd	0,035 sq.mt. (54,25 sq.in.)
Qms	4,22
Qes	0,31
Qts	0,29
Vas	45,2 lt. (1,60 cuft)
Mms	33 gr. (0,07 lb)
BL	14,6 Tm
Linear Mathematical Xmax (6)	± 5,5 mm (± 0,22 in)
Le (1kHz)	0,72 mH
Ref. Efficiency 1W@1m (half space)	96 dB

MOUNTING INFORMATION

Overall diameter	260 mm (10,24 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	244,5 mm (9,63 in)
Front mount baffle cutout Ø	232 mm (9,13 in)
Rear mount baffle cutout Ø	232 mm (9,13 in)
Total depth	121,5 mm (4,78 in)
Flange and gasket thickness	14,5 mm (0,57 in)
Flange and gasket thickness	14,5 mm (0,57 in)
Net weight	4,7 kg (10,38 lb)
Shipping weight	5,10 kg (11,26 lb)




FREQUENCY RESPONSE CURVE

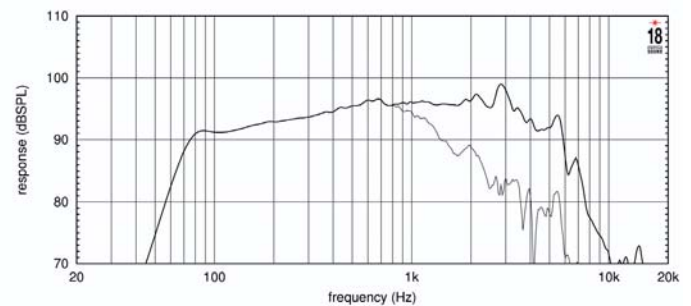

FREQUENCY RESPONSE CURVE OF 10W500 MADE ON 30 LIT. ENCLOSURE TUNED 55Hz IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

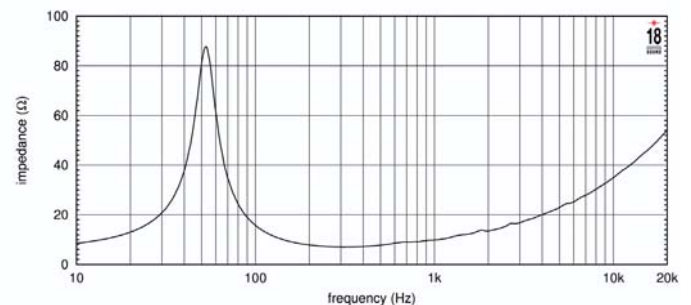

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 30 lit enclosure tuned 55Hz using a 70 - 2000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 280 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.



8MB500

MB Ferrite Transducer

95 dB SPL 1W / 1m average sensitivity
 51 mm (2 in) Interleaved Sandwich Voice coil (ISV)
 400 Watt program power handling
 Triple roll suspension for increased motion control
 Weather protected treated cellulose cone
 Lightweight diecast aluminum basket design
 Suitable for compact two way and multiway systems

GENERAL SPECIFICATIONS

Nominal Diameter	200 mm (8 in)
Rated Impedance	8 Ohm
AES Power (1)	280 W
Program Power (2)	400 W
Peak Power	800 W
Sensitivity (3)	95 dB
Frequency Range (4)	60 - 4500 Hz
Power Compression @-10dB	0,5 dB
Power Compression @-3dB	1,4 dB
Power Compression @Full Power	2,3 dB
Max Recomm. Frequency	3000 Hz
Recomm. Enclosure Volume	10 - 40 lt. (0,35 - 1,41 cuft)
Minimum Impedance	5,8 Ohm at 25°C
Max Peak To Peak Excursion	19 mm (0,75 in)

THIELE SMALL PARAMETERS (5)


Fs	74 Hz
Re	5,1 Ohm
Sd	0,023 sq.mt. (35,65 sq.in.)
Qms	2,66
Qes	0,51
Qts	0,43
Vas	21,5 lt. (0,76 cuft)
Mms	17 gr. (0,04 lb)
BL	9,0 Tm
Linear Mathematical Xmax (6)	± 6 mm (± 0,24 in)
le (1kHz)	0,60 mH
Ref. Efficiency 1W@1m (half space)	94,4 dB

MOUNTING INFORMATION

Overall diameter	210 mm (8,27 in)
N. of mounting holes and bolt	6
Mounting holes diameter	6 mm (0,23 in)
Bolt circle diameter	195 - 198 mm (7,68 - 7,80 in)
Front mount baffle cutout Ø	186 mm (7,32 in)
Rear mount baffle cutout Ø	184 mm (7,24 in)
Total depth	99,5 mm (3,92 in)
Flange and gasket thickness	14,5 mm (0,57 in)
Net weight	3,4 kg (7,5 lb)
Shipping weight	3,72 kg (8,22 lb)
CardBoard Packaging dimensions	235 x 235 x 150 mm (9,25 x 9,25 x 5,91 in)




FREQUENCY RESPONSE CURVE

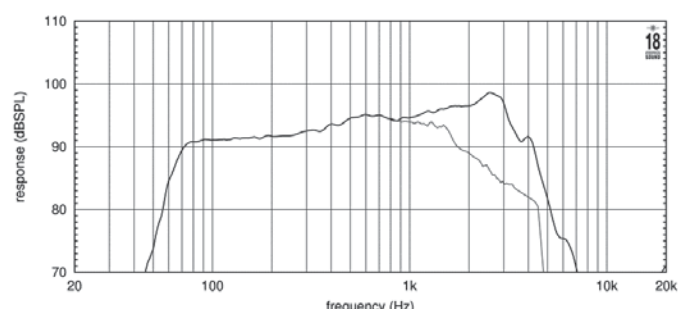

FREQUENCY RESPONSE CURVE OF 8MB500 MADE ON 25 LIT. ENCLOSURE TUNED 65Hz IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

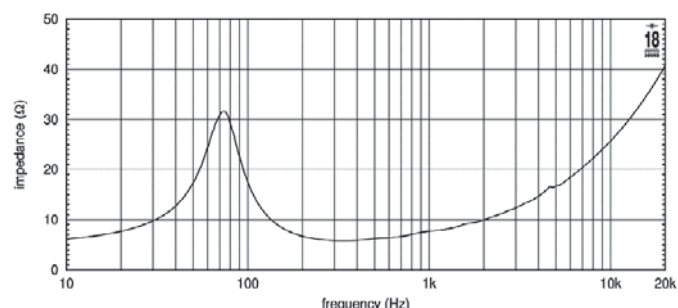

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 25 lit enclosure tuned 65Hz using a 60 - 2000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

8M400

High Output MF Ferrite Transducer

100,5 dB SPL 1W / 1m average sensitivity
 51 mm (2 in) Interleaved Sandwich Voice coil (ISV)
 250 Watt AES power handling
 Improved heat dissipation via unique basket design
 Copper ring to linearize impedance curve
 Suitable for high quality midrange applications

GENERAL SPECIFICATIONS

Nominal Diameter	200 mm (8 in)
Rated Impedance	8 Ohm
AES Power (1)	250 W
Program Power (2)	320 W
Peak Power	650 W
Sensitivity (3)	100,5 dB
Frequency Range (4)	120 - 6100 Hz
Power Compression @-10dB	0,5 dB
Power Compression @-3dB	1,6 dB
Power Compression @Full Power	2,7 dB
Max Recomm. Frequency	4000 Hz
Recomm. Enclosure Volume	2 - 10 lt. (0,07 - 0,35 cuft)
Minimum Impedance	6,5 Ohm at 25°C
Max Peak To Peak Excursion	13 mm (0,51 in)

THIELE SMALL PARAMETERS (5)


Fs	90 Hz
Re	5,2 Ohm
Sd	0,0227 sq.mt. (35,19 sq.in.)
Qms	6,2
Qes	0,28
Qts	0,27
Vas	16,2 lt. (0,57 cuft)
Mms	14 gr. (0,03 lb)
BL	12,2 Tm
Linear Mathematical Xmax (6)	± 3 mm (±0,12 in)
Le (1 kHz)	0,95 mH
Ref. Efficiency 1W@1m (half space)	98,1 dB

MOUNTING INFORMATION

Overall diameter	210 mm (8,27 in)
N. of mounting holes and bolt	6
Mounting holes diameter	6 mm (0,23 in)
Bolt circle diameter	195 - 198 mm (7,68 - 7,80 in)
Front mount baffle cutout Ø	186 mm (7,32 in)
Rear mount baffle cutout Ø	184 mm (7,24 in)
Total depth	105,5 mm (4,15 in)
Flange and gasket thickness	14,5 mm (0,57 in)
Net weight	4,5 kg (9,93 lb)
Shipping weight	4,8 kg (10,6 lb)
CardBoard Packaging dimensions	235 x 235 x 150 mm (9,25 x 9,25 x 5,91 in)




FREQUENCY RESPONSE CURVE

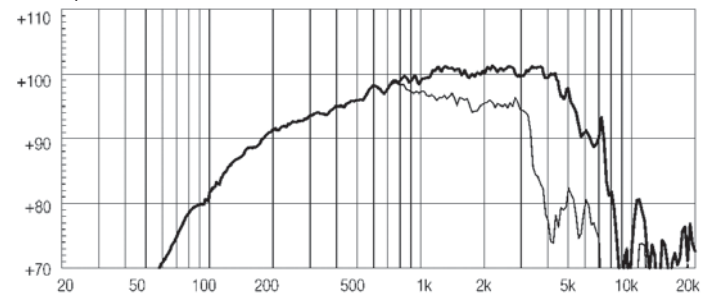

FREQUENCY RESPONSE CURVE OF 8M400 MADE ON 3 LIT. CLOSED ENCLOSURE IN FREE FIELD (4PI). ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

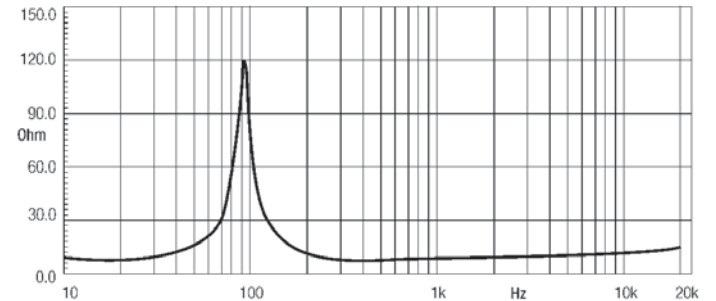

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 3 lit closed enclosure using a 100 - 2500Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 250 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.

FT 5W430

LF Ferrite Transducer

89 dB SPL 1W / 1m average sensitivity
25,4 mm (1 in) copper voice coil
120W program power handling
Weather protected cone
Ideal for compact two way and multiway systems

GENERAL SPECIFICATIONS

Nominal Diameter	125mm (5 in)
Rated Impedance	8 Ohm
AES Power (1)	80 W
Program Power (2)	120 W
Peak Power	250 W
Sensitivity (3)	89 dB
Frequency Range (4)	60 - 8000 Hz
Power Compression @-10dB	0,8 dB
Power Compression @-3dB	2,0 dB
Power Compression @Full Power	3,3 dB
Max Recomm. Frequency	4000 Hz
Recomm. Enclosure Volume	8 - 20 lt. (0.28 - 0.71 cuft)
Max Peak To Peak Excursion	16 mm (0,63in)
Voice Coil Diameter	25 mm (1 in)

THIELE SMALL PARAMETERS (5)


Fs	52 Hz
Re	5.4 Ohm
Sd	0,009 sq.mt. (13.95 sq.in.)
Qms	2.77
Qes	0.36
Qts	0.32
Vas	15 lt
Mms	8,2 gr
BL	6.3 Tm
Linear Mathematical Xmax (6)	± 6 mm (±0,24 in)
Le (1kHz)	0.49 mH
Ref. Efficiency 1W@1m (half space)	89.6 dB

MOUNTING INFORMATION

Overall diameter	134 mm (5.28 in)
N. of mounting holes and bolt	4
Mounting holes diameter	4,5 mm (0,18 in)
Bolt circle diameter	140 mm (5.51 in)
Front mount baffle cutout Ø	124 mm (4.88 in)
Rear mount baffle cutout Ø	123 mm (4.84 in)
Total depth	72 mm (2,83 in)
Flange and gasket thickness	4,5 mm (0,18 in)
Net weight	1,24 kg (2,73 lb)
Shipping weight	1,8 kg (3,97 lb)
CardBoard Packaging dimensions	12 pieces pack




FREQUENCY RESPONSE CURVE

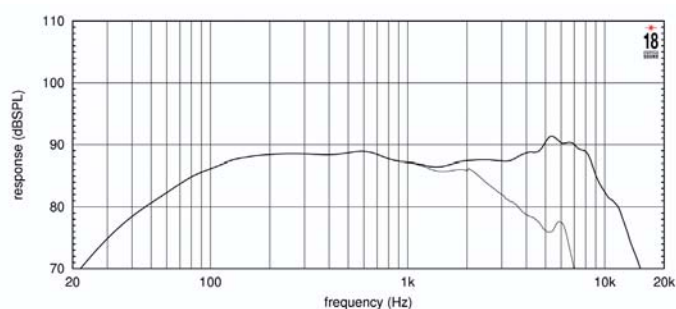

FREQUENCY RESPONSE MEASURED WITH 2.83V AT 1MT DISTANCE ON CENTRAL FORWARD AXIS FROM THE MOUTH OF XR1564 HORN. THIN LINE REPRESENTS IMPEDANCE MEASURED IN SAME CONDITIONS.

FREE AIR IMPEDANCE MAGNITUDE CURVE

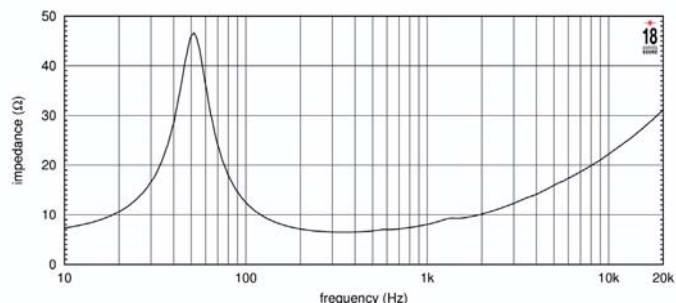

FREQUENCY RESPONSE MEASURED WITH 1W INPUT ON RATED IMPEDANCE ON CENTRAL FORWARD AXIS IN A PLANE WAVE TUBE. THIN LINE REPRESENTS IMPEDANCE MEASURED IN SAME CONDITIONS.

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 10 lit enclosure tuned at 75 Hz using a 100 - 1000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 1000Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gap depth.



HF DRIVERS - NEODYMIUM



HF Neodymium Driver

113 dB 1W / 1m average sensitivity
 1,5 inch exit throat
 4 inch edgewound aluminium voice coil
 280W max. program power handling
 4 inch pure Beryllium dome - polymer surround diaphragm
 Copper plated pole piece reduces inductance modulation distortion and increases HF output
 Ultra high precision diaphragm centering system for improved performances and lifespan
 BEM optimized 4 slot phaseplug design
 Extreme sound clarity even at very high SPL




GENERAL SPECIFICATIONS

Throat Diameter	39 mm (1,5 in)
Rated Impedance	8 Ohm
DC Resistance	4,2 Ohm
Minimum Impedance	6,4 Ohm
Le (at 1 kHz)	N/A
Sensitivity (3)	113 dB
Frequency Range	900 Hz - 20 kHz
Diaphragm Material	Pure beryllium dome on polymer surround
Voice Coil Diameter	100 mm (4 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium
Flux Density	2 T
BL Factor	13,4 Tm
Polarity	Positive voltage on red terminal gives positive pressure in the throat

MOUNTING INFORMATION


Overall diameter	150 mm (6 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø102 mm (4 in)
Bolt circle diameter	102 - 114,7 mm (4 - 4.52 in)
Total depth	57 mm (2,2 in)
Net weight	3.2 Kg (7 lb)
Shipping weight	3.7 Kg (8.14 lb)
CardBoard Packaging dimensions	170 x 170 x 80 mm (6,69 x 6,69 x 3,15 in)

FREQUENCY RESPONSE CURVE

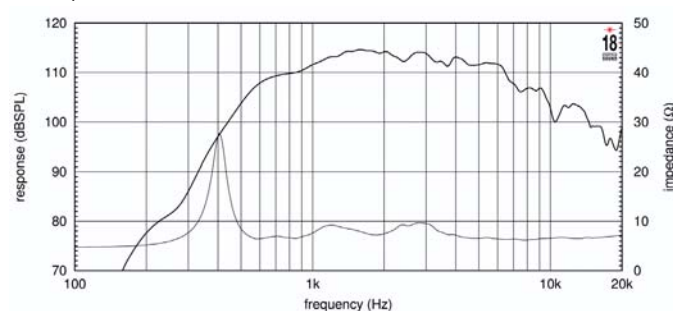

FREQUENCY RESPONSE MEASURED WITH 2.83V AT 1MT DISTANCE ON CENTRAL FORWARD AXIS FROM THE MOUTH OF XR1564 HORN. THIN LINE REPRESENTS IMPEDANCE MEASURED IN SAME CONDITIONS.

FREE AIR IMPEDANCE MAGNITUDE CURVE

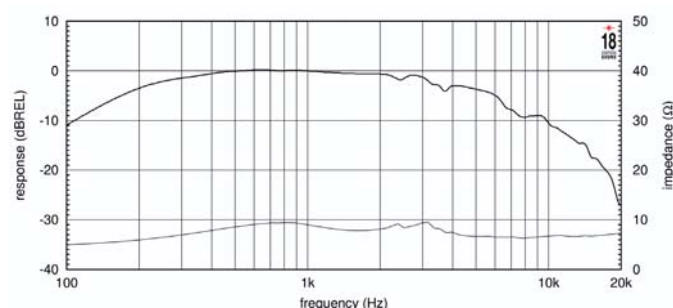

FREQUENCY RESPONSE MEASURED WITH 1W INPUT ON RATED IMPEDANCE ON CENTRAL FORWARD AXIS IN A PLANE WAVE TUBE. THIN LINE REPRESENTS IMPEDANCE MEASURED IN SAME CONDITIONS.

NOTES

- 1) Continuous Power is defined as 3 dB greater than the one measured with the new AES2-2012 standard, using continuous pink noise having 12 dB crest factor for 2 hours, mounted on XR1564 horn, from 1.2kHz to 12kHz.
- 2) Max. program power rating is defined as 3 dB greater than continuous power rating and is a conservative expression of the transducer ability to handle music program material
- 3) Sensitivity represent the averaged value of acoustic output as measured at 1 mt distance on axis from the mouth of XR1564 horn, when connected to 2,83V sine wave swept between 1000 and 4000 Hz.

NSD4015N

HF Neodymium Driver

111 dB 1W / 1m average sensitivity
 1,5 inch exit throat
 4 inch edgewound aluminium voice coil
 320W max. program power rating
 True Piston Motion TiN coated titanium diaphragm
 Copper ring reduces inductance modulation distortion and increases high frequency output
 Ultra high precision diaphragm centering system for improved performances and lifespan
 BEM optimized 4-slot metal alloy phase-plug
 Available also in 1.4" and 2" exit versions




GENERAL SPECIFICATIONS

Throat Diameter	39 mm (1,5 in)
Rated Impedance	8 Ohm
DC Resistance	6,0 Ohm
Minimum Impedance	9,2 Ohm
Le (at 1kHz)	N/A
Sensitivity (3)	111 dB
Frequency Range	800 Hz - 20 kHz
Diaphragm Material	Nitride Coated Titanium
Voice Coil Diameter	100 mm (4 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium
Flux Density	2 T
BL Factor	17 Tm
Polarity	Positive voltage on red terminal gives positive pressure in the throat

MOUNTING INFORMATION


Overall diameter	150 mm (6 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø102 mm (4 in)
Bolt circle diameter	102 - 114,7 mm (4 - 4.52 in)
Total depth	57 mm (2,2 in)
Net weight	3.2 Kg (7 lb)
Shipping weight	3.6 Kg (8.1 lb)
CardBoard Packaging dimensions	170 x 170 x 80 mm (6,69 x 6,69 x 3,15 in)

FREQUENCY RESPONSE CURVE

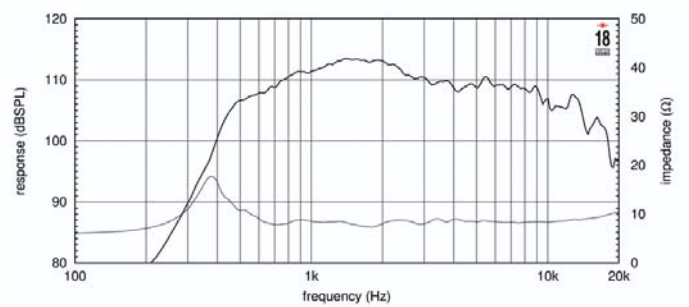

FREQUENCY RESPONSE MEASURED WITH 2.83 V INPUT AT 1 METER DISTANCE ON CENTRAL FORWARD AXIS FROM THE MOUTH OF XR1564 HORN. THIN LINE REPRESENTS IMPEDANCE MEASURED IN SAME CONDITIONS.

FREE AIR IMPEDANCE MAGNITUDE CURVE

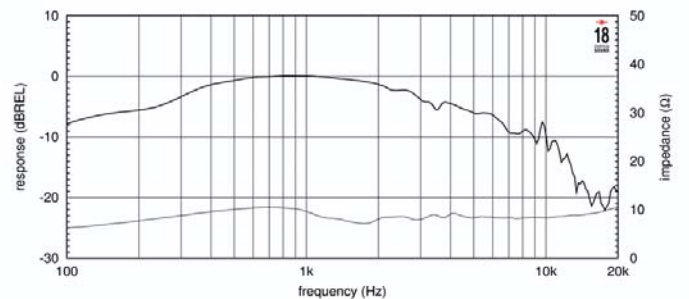

FREQUENCY RESPONSE MEASURED WITH 77.5 mV INPUT ON CENTRAL FORWARD AXIS IN A PLANE WAVE TUBE. THIN LINE REPRESENTS IMPEDANCE MEASURED IN SAME CONDITIONS.

NOTES

- 1) Sensitivity represent the averaged value of acoustic output as measured on the central forward axis of a XR1564 horn, at a distance 1 m from horn mouth, when connected to 2,83 V sine wave swept between 1000-4000 Hz
- 2) Sensitivity represent the averaged value of acoustic output as measured on the central forward axis of a XR1564 horn, at a distance 1 m from horn mouth, when connected to 2,83 V sine wave swept between 1000-4000 Hz
- 3) Minimum Crossover frequency requires at least 12 dB oct slope high pass filter

HF Neodymium Driver

Next Gen Titanium diaphragm for higher sensitivity and extended high frequency

112 dB 1W / 1m average sensitivity

1.5 inch throat exit

4 inch edgewound aluminium voice coil

320W max. program power handling

HF copper sleeve for reduced distortion and increased output

BEM optimized 4-slot metal alloy phase plug

Available also in 1.4" and 2" exit versions

GENERAL SPECIFICATIONS


Throat Diameter	38 mm (1,5 in)
Rated Impedance	8 Ohm
DC Resistance	4.7 Ohm
Minimum Impedance	6.9 Ohm @ 5500 Hz
Le (at 1kHz)	N/A
Continuous Power	160 W
Max program power	320 W
Sensitivity (3) (1W@1m)	113 dB
Frequency Range	800 Hz - 20 kHz
Minimum Xover Frequency	800 Hz with 24 dB/oct LR
Diaphragm Material	Pure Titanium
Voice Coil Diameter	100 mm (4 in)
Voice Coil Winding Material	Edge-wound CCAW
Magnet Material	Neodymium
Flux Density	2 T
BL Factor	1.7 Tm

MOUNTING INFORMATION

Overall diameter	150 mm (6 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø102 mm (4 in)
Bolt circle diameter	102 mm (4 in)
Total depth	57 mm (2,2 in)
Net weight	3.2 Kg (7 lb)
Shipping weight	3.6 Kg (7.94 lb)
CardBoard Packaging dimensions	170 x 170 x 80 mm (6,69 x 6,69 x 3,15 in)




FREQUENCY RESPONSE CURVE

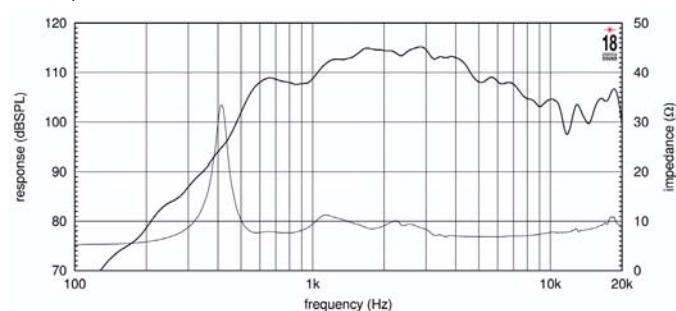

FREQUENCY RESPONSE MEASURED WITH 2,83 V INPUT ON AXIS AT 1 METER DISTANCE FROM THROAT OF XR1564 HORN. IMPEDANCE MEASURED ON SAME HORN.

FREE AIR IMPEDANCE MAGNITUDE CURVE

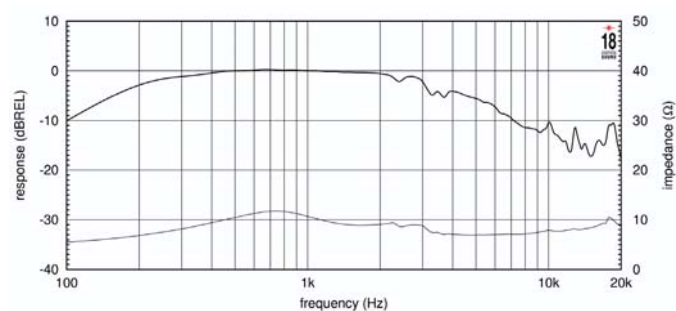

FREQUENCY RESPONSE MEASURED WITH 77,5 mV INPUT ON 1,5 in PLANE WAVE TUBE. IMPEDANCE MEASURED ON SAME PLANE WAVE TUBE.

NOTES

- 1) Continuous Power is defined as a level that is 3 dB greater than the one measured with the new AES2-2012 standard, using continuous pink noise having 12 dB crest factor for 2 hours, mounted on XR1564 horn, from 1 kHz up to 10 kHz.
- 2) Program power rating is defined as 3 dB greater than continuous power rating and is a conservative expression of the transducer ability to handle music program material
- 3) Sensitivity represent the averaged value of acoustic output as measured on the central forward axis of a XR1564 horn, at a distance 1 m from horn mouth, when connected to 2,83 V sine wave swept between 1000-4000 Hz.

ND2080

HF Neodymium Driver


110 dB SPL 1W / 1m average sensitivity
 2 inch exit throat
 3 inch edgewound aluminum voice coil
 200 W program power handling
 Pure Titanium diaphragm assembly
 Neodymium ring magnetic structure
 Excellent thermal exchange



GENERAL SPECIFICATIONS

Throat Diameter	50 mm (2 in)
Rated Impedance	8 Ohm
DC Resistance	6,2 Ohm
Minimum Impedance	8 Ohm at 3500 Hz
Le (at 1kHz)	124 µH
AES Power (1)	100 W above 1,2 kHz
Program Power (2)	200 W above 1,2 kHz
Frequency Range	500 Hz - 20 kHz
Recomm. Xover Frequency	800Hz 12 dB/octave
Diaphragm Material	Titanium
Voice Coil Diameter	75 mm (3 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium
Flux Density	2,2 T

FREQUENCY RESPONSE CURVE

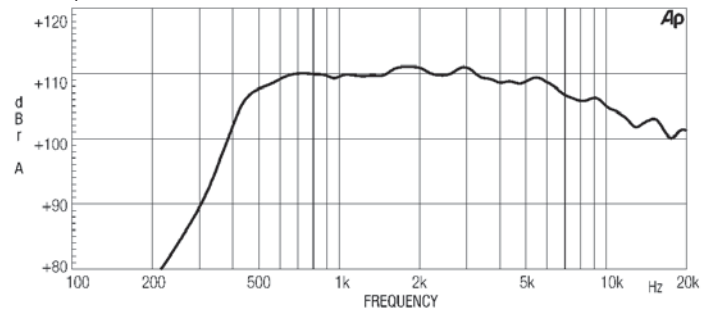


ND 2080 MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1M DISTANCE FROM THE MOUTH OF XR2064 HORN

MOUNTING INFORMATION

Overall diameter	131 mm (5,1 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø102 mm (4 in)
Bolt circle diameter	102mm (4 in)
Total depth	99 mm (3,9 in)
Net weight	3,6 kg (7,9 lb)
Shipping weight	4 kg (8,8 lb)
CardBoard Packaging dimensions	132x132x103 mm(5,2x5,2x4,1 in)

FREE AIR IMPEDANCE MAGNITUDE CURVE

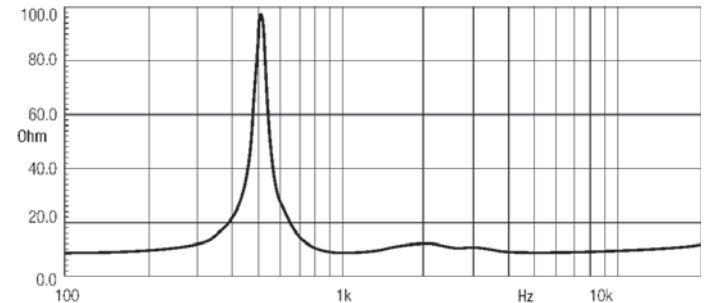

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured on 1 W input on rated impedance at 1 m on axis from the mouth of XR2064 horn, averaged between 1 kHz and 4 kHz.



ND2060A

HF Neodymium Driver

110 dB 1W/1m average sensitivity
 2 inch exit throat
 3 inch edgewound aluminum voice coil
 160 W program power handling
 Aluminum PEN diaphragm
 Neodymium magnetic structure
 Excellent thermal exchange

GENERAL SPECIFICATIONS


Throat Diameter	50 mm (2 in)
Rated Impedance	8 Ohm
DC Resistance	6,2 Ohm
Minimum Impedance	8 Ohm at 3500 Hz
Le (at 1 kHz)	124 µH
AES Power (1)	80 W above 1,2 kHz
Program Power (2)	160 W above 1,2 kHz
Sensitivity (3) (1W@1m)	110 dB
Frequency Range	500 Hz - 20 kHz
Recomm. Xover Frequency	Above 800Hz (12 dB/oct slope)
Diaphragm Material	Aluminum - Polyethylene
Voice Coil Diameter	75 mm (3 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium

MOUNTING INFORMATION

Overall diameter	132,5 mm (5,22 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø102 mm (4 in)
Bolt circle diameter	102mm (4 in)
Total depth	99 mm (3,9 in)
Net weight	3,6 kg (7,9 lb)
Shipping weight	4 kg (8,8 lb)
CardBoard Packaging dimensions	132x132x103 mm(5,2x5,2x4,1 in)




FREQUENCY RESPONSE CURVE

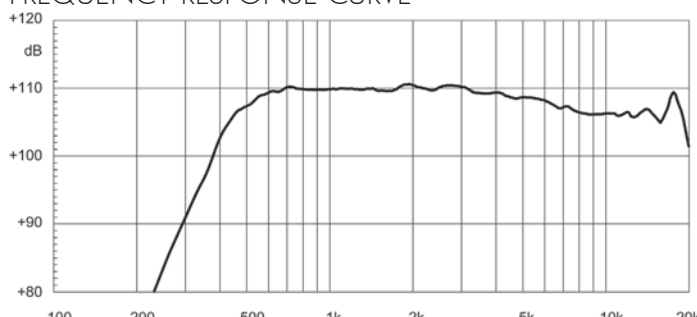

ND2060A MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1 M DISTANCE FROM THE MOUTH OF XR2064 HORN

FREE AIR IMPEDANCE MAGNITUDE CURVE

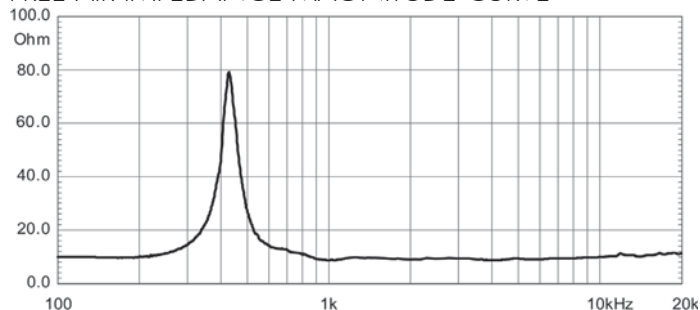

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured on 1 W input on rated impedance at 1 m on axis from the mouth of XR2064 horn, averaged between 1 kHz and 4 kHz.

ND2060

HF Neodymium Driver

109 dB SPL 1W / 1m average sensitivity
 2 inch exit throat
 3 inch aluminum edgewound voice coil
 200 W program power handling
 Neodymium magnetic structure
 Pure Titanium diaphragm assembly
 Excellent thermal exchange

GENERAL SPECIFICATIONS


Throat Diameter	50 mm (2 in)
Rated Impedance	8 Ohm
DC Resistance	6,2 Ohm
Minimum Impedance	8 Ohm at 3500 Hz
Le (at 1kHz)	124 μ H
AES Power (1)	100 W above 1,2 kHz
Program Power (2)	200 W above 1,2 kHz
Frequency Range	500 Hz - 20 kHz
Recomm. Xover Frequency	800Hz (12 dB/oct slope)
Diaphragm Material	Titanium
Voice Coil Diameter	75 mm (3 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium
Flux Density	1,9 T

MOUNTING INFORMATION

Overall diameter	132,5 mm (5,22 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø102 mm (4 in)
Bolt circle diameter	102mm (4 in)
Total depth	99 mm (3,9 in)
Net weight	3,6 kg (7,9 lb)
Shipping weight	4 kg (8,8 lb)
CardBoard Packaging dimensions	132x132x103 mm(5,2x5,2x4,1 in)




FREQUENCY RESPONSE CURVE

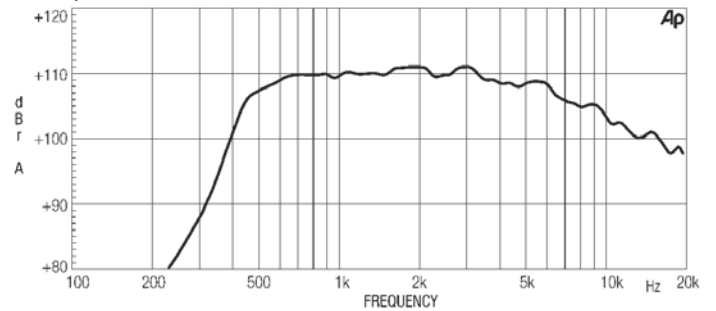

ND2060 MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1 M DISTANCE FROM THE MOUTH OF XR2064 HORN

FREE AIR IMPEDANCE MAGNITUDE CURVE

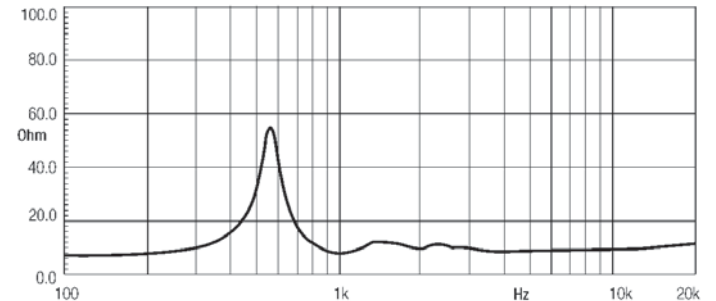

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured on 1 W input on rated impedance at 1 m on axis from the mouth of XR2064 horn, averaged between 1 kHz and 4 kHz.



NSD1480N

HF Neodymium Driver


111 dB 1W / 1m average sensitivity
1,4 inch exit throat
3 inch voice coil diameter
200W program power handling
Titanium Nitride Coated Dome
True Piston Motion TiN coated titanium diaphragm
High grade neodymium magnetic structure
Excellent thermal exchange



GENERAL SPECIFICATIONS

Throat Diameter	35,5 mm (1,4 in)
Rated Impedance	8 Ohm
DC Resistance	6,2 Ohm
Minimum Impedance	8 Ohm at 3500 Hz
Le (at 1 kHz)	124 µH
AES Power (1)	100 W above 1,2 kHz
Program Power (2)	200 W above 1,2 kHz
Sensitivity (3)	111 dB
Frequency Range	500 Hz - 20 kHz
Recomm. Xover Frequency	above 800 Hz (12 dB/octave)
Diaphragm Material	TiN coated Titanium
Voice Coil Diameter	75 mm (3 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium

FREQUENCY RESPONSE CURVE

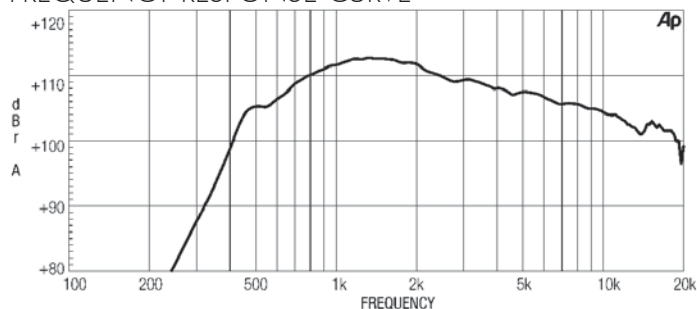


NSD1480N MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1 M DISTANCE ON AXIS FROM THE MOUTH OF XT1464 HORN

MOUNTING INFORMATION

Overall diameter	131 mm (5,1 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø102 mm (4 in)
Bolt circle diameter	102mm (4 in)
Total depth	62 mm (2,5 in)
Net weight	3,1 Kg (6,98 lb)
Shipping weight	3,3 Kg (7,25 lb)
CardBoard Packaging dimensions	132x132x68 mm (5,2x5,2x2,7 in)

FREE AIR IMPEDANCE MAGNITUDE CURVE

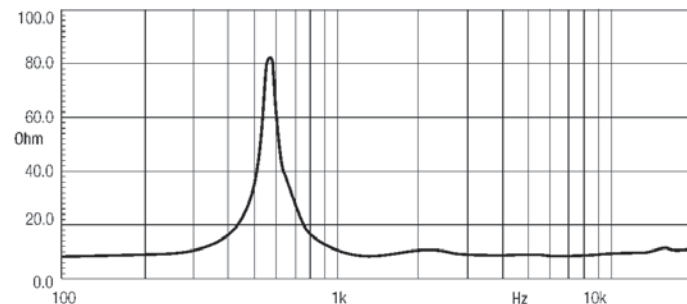

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured on 1 W input on rated impedance at 1 m on axis from the mouth of XT1464 horn averaged between 1 kHz and 4 kHz.

ND1480A

HF Neodymium Driver


111 dB 1W/1m average sensitivity
 1,4 inch exit throat
 3 inch edgewound aluminum voice coil
 160 W program power handling
 Aluminum PEN sandwich diaphragm
 Neodymium magnetic structure
 Ideal for line array applications



GENERAL SPECIFICATIONS

Throat Diameter	35,5 mm (1,4 in)
Rated Impedance	8 Ohm
DC Resistance	6,2 Ohm
Minimum Impedance	8 Ohm at 3500 Hz
Le (at 1 kHz)	124 µH
AES Power (1)	80 W above 1,2 kHz
Program Power (2)	160 W above 1,2 kHz
Sensitivity (3) (1W@1M)	111 dB
Frequency Range	500 Hz - 20 kHz
Recomm. Xover Frequency	above 800 Hz (12 dB/octave)
Diaphragm Material	Polyethylene-Aluminum
Voice Coil Diameter	74,4 mm (2,93 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium

FREQUENCY RESPONSE CURVE

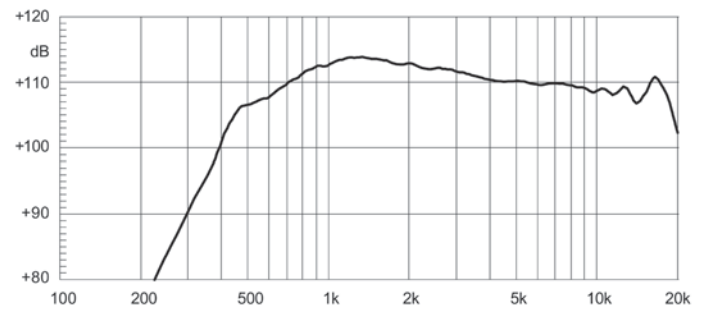


ND1480A MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1 M DISTANCE ON AXIS FROM THE MOUTH OF XT1464 HORN

MOUNTING INFORMATION

Overall diameter	131 mm (5,1 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø102 mm (4 in)
Bolt circle diameter	102mm (4 in)
Total depth	62 mm (2,5 in)
Net weight	3,1 Kg (7 lb)
Shipping weight	3,3 Kg (7,3 lb)
CardBoard Packaging dimensions	132x132x68 mm (5,2x5,2x2,7 in)

FREE AIR IMPEDANCE MAGNITUDE CURVE

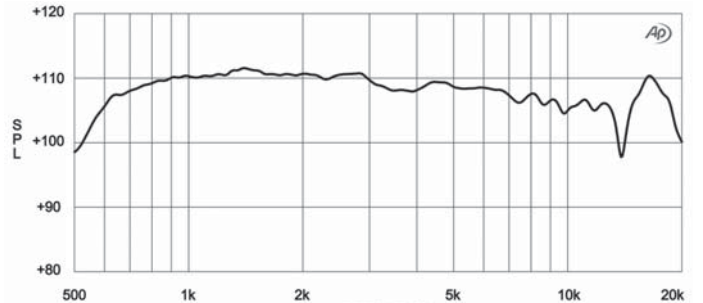

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured at 1W input on rated impedance at 1 mt distance on axis from the mouth of the horn, averaged between 1 kHz and 4 kHz.

HF Neodymium Driver


110 dB 1W / 1m average sensitivity
 1,4 inch exit throat
 3 inch edgewound aluminum voice coil
 200 W program power handling
 Pure Titanium diaphragm assembly
 Excellent thermal exchange
 Neodymium ring magnetic structure



GENERAL SPECIFICATIONS

Throat Diameter	35,5 mm (1,4 in)
Rated Impedance	8 Ohm
DC Resistance	6,2 Ohm
Minimum Impedance	8 Ohm at 3500 Hz
Le (at 1 kHz)	124 µH
AES Power (1)	100 W above 1,2 kHz
Program Power (2)	200 W above 1,2 kHz
Sensitivity (3)	110 dB
Frequency Range	500 Hz - 20 kHz
Recomm. Xover Frequency	above 800 Hz (12 dB/octave)
Diaphragm Material	Titanium
Voice Coil Diameter	75 mm (3 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium

FREQUENCY RESPONSE CURVE

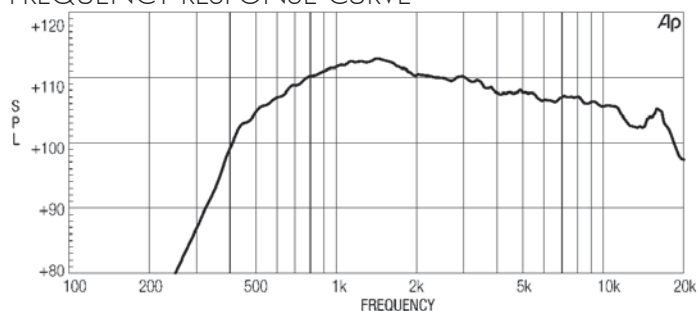


ND1480 MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1 M DISTANCE ON AXIS FROM THE MOUTH OF XT1464 HORN

MOUNTING INFORMATION

Overall diameter	131 mm (5,1 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø102 mm (4 in)
Bolt circle diameter	102mm (4 in)
Total depth	62 mm (2,5 in)
Net weight	3,1 Kg (6,98 lb)
Shipping weight	3,3 Kg (7,25 lb)
CardBoard Packaging dimensions	132x132x68 mm (5,2x5,2x2,7 in)

FREE AIR IMPEDANCE MAGNITUDE CURVE

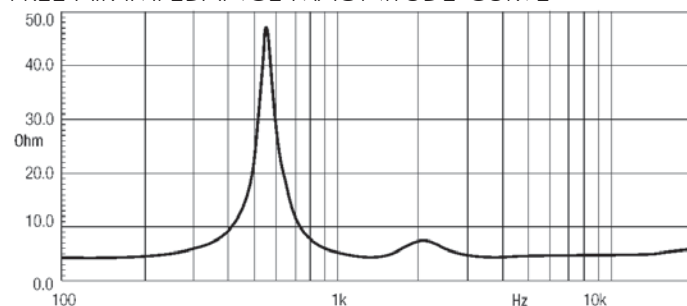

NOTES

- 1) AES power rating is measured with a pink noise input having a 6 dB crest factor for two hours duration, per AES standard. Power calculated on minimum impedance.
- 2) Program power is defined as 3 dB greater than AES power rating and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured on 1 W input on rated impedance at 1 m on axis from the mouth of XT1464 horn, averaged between 1 kHz and 4 kHz.

ND1460A

HF Neodymium Driver


110 dB 1W/1m average sensitivity
 1,4 inch exit throat
 3 inch edgewound aluminum voice coil
 160W program power handling
 Aluminum PEN diaphragm
 High grade neodymium magnetic structure
 Excellent thermal exchange



GENERAL SPECIFICATIONS

Throat Diameter	35,5 mm (1,4 in)
Rated Impedance	8 Ohm
DC Resistance	6,2 Ohm
Minimum Impedance	8 Ohm at 3500 Hz
Le (at 1 kHz)	124 µH
AES Power (1)	80 W above 1,2 kHz
Program Power (2)	160 W above 1,2 kHz
Sensitivity (3) (1W@1M)	110 dB
Frequency Range	500 Hz - 20 kHz
Recomm. Xover Frequency	above 800 Hz (12 dB/octave)
Diaphragm Material	Aluminum - Polyethylene
Voice Coil Diameter	75 mm (3 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium

FREQUENCY RESPONSE CURVE

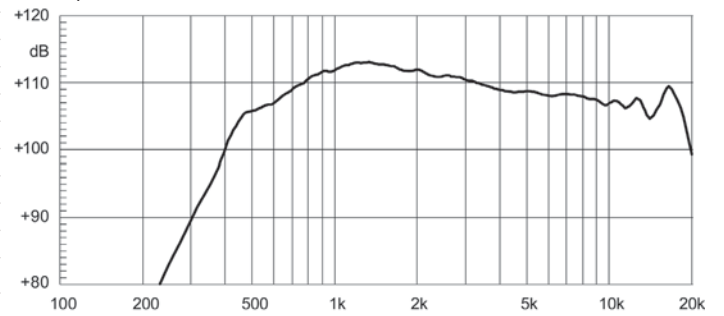


ND1460A MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1 M DISTANCE ON AXIS FROM THE MOUTH OF XT1464 HORN

MOUNTING INFORMATION

Overall diameter	132,5 mm (5,22 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø102 mm (4 in)
Bolt circle diameter	102mm (4 in)
Total depth	62 mm (2,5 in)
Net weight	3,2 Kg (7,1 lb)
Shipping weight	3,4 Kg (7,5 lb)
CardBoard Packaging dimensions	132x132x68 mm (5,2x5,2x2,7 in)

FREE AIR IMPEDANCE MAGNITUDE CURVE

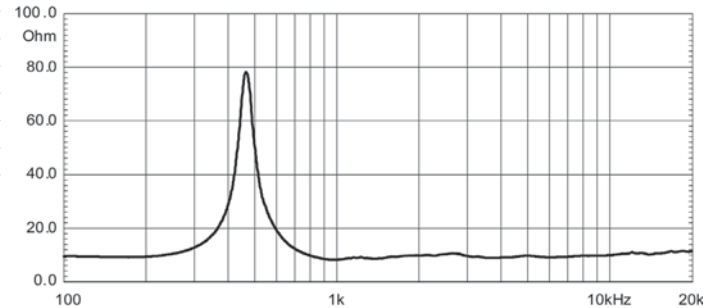

NOTES

AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.

Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.

Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XT1464 horn, averaged between 1 kHz and 4 kHz.

HF Neodymium Driver

109 dB 1W / 1m average sensitivity
 1,4 inch exit throat
 3 inch edgewound aluminum voice coil
 200 W continuous program power handling
 Pure Titanium diaphragm assembly
 Neodymium magnetic structure
 Excellent thermal exchange

GENERAL SPECIFICATIONS


Throat Diameter	35,5 mm (1,4 in)
Rated Impedance	8 Ohm
DC Resistance	6,2 Ohm
Minimum Impedance	8 Ohm at 3500 Hz
Le (at 1 kHz)	124 µH
AES Power (1)	100 W above 1,2 kHz
Program Power (2)	200 W above 1,2 kHz
Sensitivity (3)	109 dB
Frequency Range	500 Hz - 20 kHz
Recomm. Xover Frequency	above 800 Hz (12 dB/octave)
Diaphragm Material	Titanium
Voice Coil Diameter	75 mm (3 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium

MOUNTING INFORMATION

Overall diameter	132,5 mm (5,22 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø102 mm (4 in)
Bolt circle diameter	102mm (4 in)
Total depth	62 mm (2,5 in)
Net weight	3,2 Kg (7,1 lb)
Shipping weight	3,4 Kg (7,5 lb)
CardBoard Packaging dimensions	132x132x68 mm (5,2x5,2x2,7 in)




FREQUENCY RESPONSE CURVE

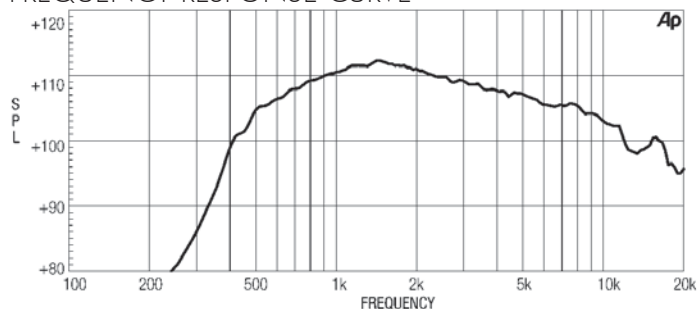

ND1460 MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1 M DISTANCE ON AXIS FROM THE MOUTH OF XT1464 HORN

FREE AIR IMPEDANCE MAGNITUDE CURVE

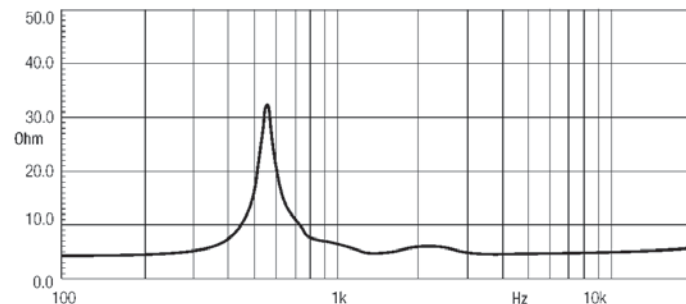

NOTES

AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.

Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.

Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XT1464 horn, averaged between 1 kHz and 4 kHz.

NSD1424BTN

HF Neodymium Driver


110 dB 1W / 1m average sensitivity
 140 W program power handling
 1,4 inches exit throat
 64mm (2,4 in) edgewound aluminum voice coil
 True Piston Motion TiN coated titanium diaphragm
 Proprietary phase plug design
 High grade neodymium magnetic structure
 Excellent thermal exchange



GENERAL SPECIFICATIONS

Throat Diameter	35,5 mm (1,4 in)
Rated Impedance	8 Ohm
DC Resistance	6 Ohm
Minimum Impedance	8 Ohm at 3000 Hz
AES Power (1)	70 W above 1,2 kHz
Program Power (2)	140 W above 1,2 kHz
Sensitivity (3)	110 dB
Frequency Range	800 Hz - 20 kHz
Recomm. Xover Frequency	above 1200 Hz (12 dB/octave)
Diaphragm Material	TiN coated Titanium
Voice Coil Diameter	60 mm (2,4 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium
Flux Density	1,9 T

FREQUENCY RESPONSE CURVE

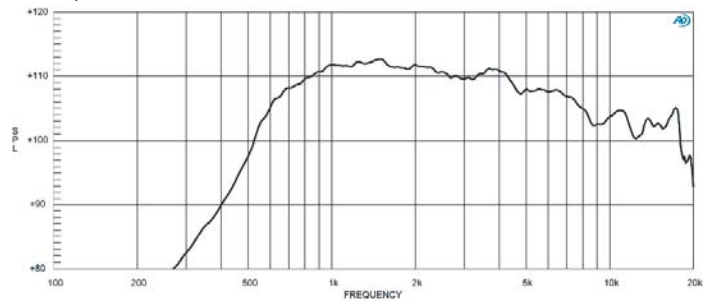


NSD1424BTN MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1 M DISTANCE ON AXIS FROM THE MOUTH OF XT1464 HORN

MOUNTING INFORMATION

Overall diameter	116,6 mm (4,59 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø102 mm (4 in)
Bolt circle diameter	102mm (4 in)
Total depth	54,5 mm (2,15 in)
Net weight	1,7 Kg (3,70 lb)
Shipping weight	1,9 Kg (4,20 lb)
CardBoard Packaging dimensions	132x132x68 mm (5,2x5,2x2,7 in)

FREE AIR IMPEDANCE MAGNITUDE CURVE

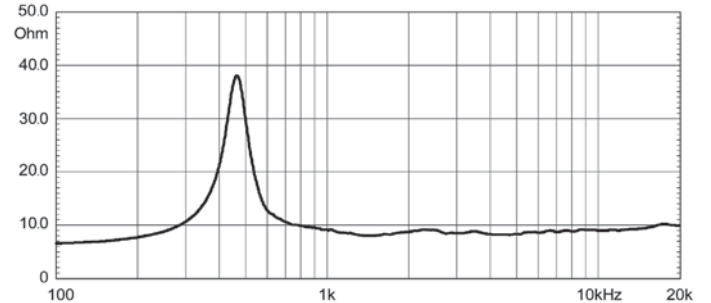

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XT1464 horn, averaged between 1 kHz and 4 kHz.



ND1424BT

HF Neodymium Driver


109 dB 1W / 1m average sensitivity
 1,4 inch exit throat
 2,4 inch edgewound aluminum voice coil
 140 W program power handling
 Pure Titanium diaphragm assembly
 Proprietary phase plug design
 Excellent thermal exchange
 Neodymium magnetic structure



GENERAL SPECIFICATIONS

Throat Diameter	35,5 mm (1,4 in)
Rated Impedance	8 Ohm
DC Resistance	6 Ohm
Minimum Impedance	8 Ohm at 3000 Hz
AES Power (1)	70 W above 1,2 kHz
Program Power (2)	140 W above 1,2 kHz
Sensitivity (3)	109 dB
Frequency Range	800 Hz - 20 kHz
Recomm. Xover Frequency	above 1200 Hz (12 dB/octave)
Diaphragm Material	Titanium
Voice Coil Diameter	60 mm (2,4 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium
Flux Density	1,9 T

FREQUENCY RESPONSE CURVE

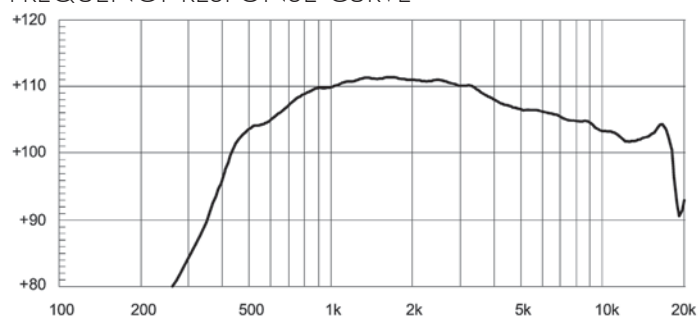


ND1424BT MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1 M DISTANCE ON AXIS FROM THE MOUTH OF XT1464 HORN

MOUNTING INFORMATION

Overall diameter	116,6 mm (4,59 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø102 mm (4 in)
Bolt circle diameter	102mm (4 in)
Total depth	54,5 mm (2,15 in)
Net weight	1,7 Kg (3,70 lb)
Shipping weight	1,9 Kg (4,20 lb)
CardBoard Packaging dimensions	132x132x68 mm (5,2x5,2x2,7 in)

FREE AIR IMPEDANCE MAGNITUDE CURVE

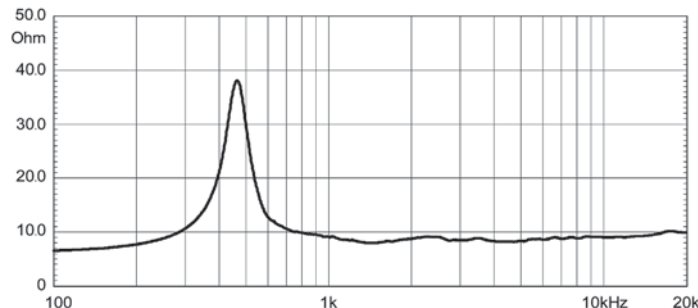

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XT1464 horn, averaged between 1kHz and 4 kHz.

NSD1095N

HF Neodymium Driver


110 dB SPL 1W / 1m average sensitivity
 1 inch exit throat
 1,75 inch voice coil diameter
 100W program power handling
 True Piston Motion TiN coated titanium diaphragm
 Neodymium ring magnetic structure
 Proprietary phase plug design
 Excellent thermal exchange



GENERAL SPECIFICATIONS

Throat Diameter	25,4 mm (1 in)
Rated Impedance	8 Ohm
DC Resistance	5,3 Ohm
Minimum Impedance	7 Ohm at 4000Hz
Le (at 1 kHz)	67 µH
AES Power (1)	50 W above 1,6 kHz
Program Power (2)	100 W above 1,6 kHz
Sensitivity (3)	110 dB
Frequency Range	1600Hz - 20kHz
Recomm. Xover Frequency	1600Hz (12dB/oct slope)
Diaphragm Material	TiN coated Titanium
Voice Coil Diameter	44,4 mm (1 3/4 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium


FREQUENCY RESPONSE CURVE

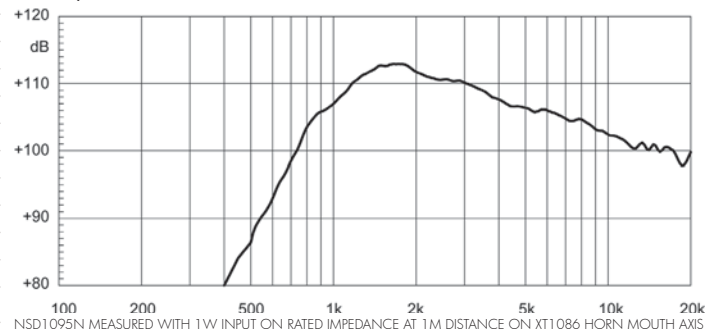

MOUNTING INFORMATION

Overall diameter	93 mm (3,7 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø 76 mm (3 in)
Bolt circle diameter	76 mm (3 in)
Total depth	53 mm (2,1 in)
Net weight	1,2 Kg (2,6 lb)
Shipping weight	1,3 Kg (2,9 lb)
CardBoard Packaging dimensions	97x97x58 mm (3,8x3,8x2,3 in)

FREE AIR IMPEDANCE MAGNITUDE CURVE

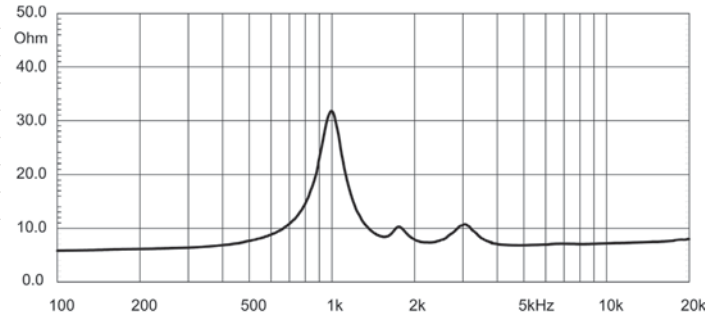

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XT1086 horn averaged between 1 kHz and 4 kHz.



ND1090

HF Neodymium Driver


110 dB 1W / 1m average sensitivity
1 inch exit throat
44 mm (1 3/4 in) edgewound aluminum voice coil
100 Watt program power handling
Titanium dome over PEN suspension
Proprietary phase plug design
Neodymium ring magnetic structure
Excellent thermal exchange



GENERAL SPECIFICATIONS

Throat Diameter	25,4 mm (1 in)
Rated Impedance	8 Ohm
DC Resistance	5,3 Ohm
Minimum Impedance	7 Ohm at 4000Hz
Le (at 1kHz)	120 µH
AES Power (1)	50 W above 1,6 kHz
Program Power (2)	100 W above 1,6 kHz
Sensitivity (3)	110 dB
Frequency Range	1600Hz - 20kHz
Recomm. Xover Frequency	1600Hz (12dB/oct slope)
Diaphragm Material	Titanium - PEN
Voice Coil Diameter	44,4 mm (1 3/4 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium

FREQUENCY RESPONSE CURVE

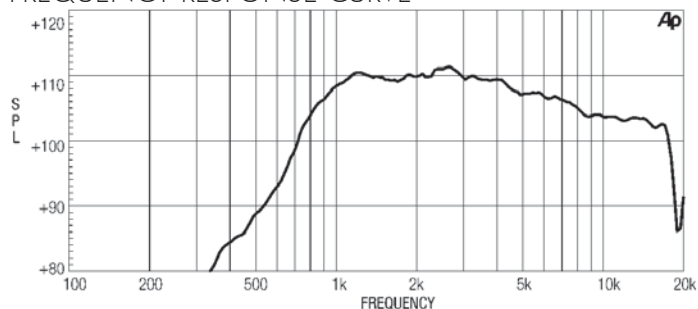


ND1090 MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1M DISTANCE ON XT1086 HORN MOUTH AXIS

MOUNTING INFORMATION

Overall diameter	93 mm (3,7 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø 76 mm (3 in)
Bolt circle diameter	76 mm (3 in)
Total depth	53 mm (2,1 in)
Net weight	1,2 Kg (2,6 lb)
Shipping weight	1,3 Kg (2,9 lb)
CardBoard Packaging dimensions	97x97x58 mm (3,8x3,8x2,3 in)

FREE AIR IMPEDANCE MAGNITUDE CURVE

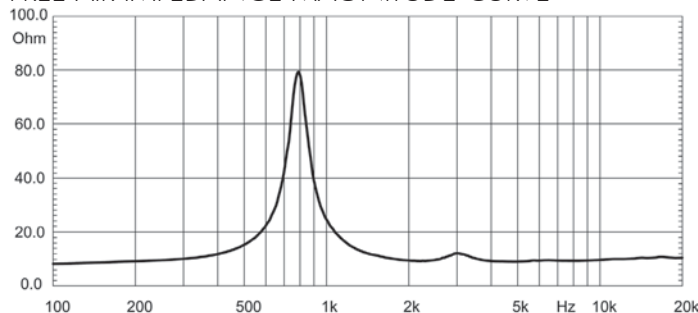

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XT1086 horn, averaged between 1 kHz and 4 kHz.

ND1085

HF Neodymium Driver


1 inch exit throat
 109 dB 1W / 1m average sensitivity
 80 Watt program power handling
 44 mm (1 3/4 in) edgewound aluminum voice coil
 PEN diaphragm for extended frequency response
 Proprietary phase plug design
 Neodymium ring magnet for excellent transient response
 Excellent thermal exchange



GENERAL SPECIFICATIONS

Throat Diameter	25,4 mm (1 in)
Rated Impedance	8 Ohm
DC Resistance	5,2 Ohm
Minimum Impedance	7,8 Ohm at 4000Hz
Le (at 1 kHz)	66 µH
AES Power (1)	40 W above 1,6 kHz
Program Power (2)	80 W above 1,6 kHz
Sensitivity (3)	109 dB
Frequency Range	1600Hz - 20kHz
Recomm. Xover Frequency	1600Hz (12dB/oct slope)
Diaphragm Material	Titanium - PEN
Voice Coil Diameter	44,4 mm (1 3/4 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium

FREQUENCY RESPONSE CURVE

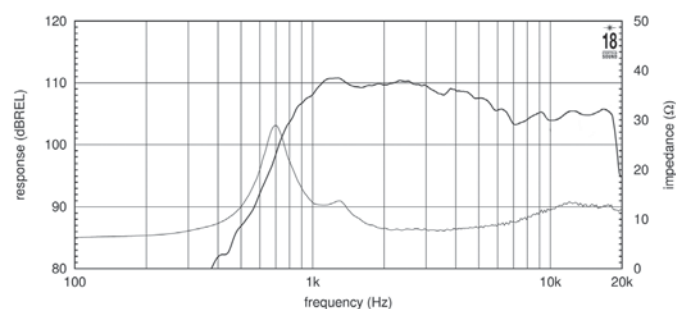


ND1085 FREQUENCY RESPONSE MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1M DISTANCE ON CENTRAL FORWARD AXIS FROM THE MOUTH OF REFERENCE HORN. THIN LINE REPRESENTS IMPEDANCE MEASURED IN SAME CONDITIONS.

MOUNTING INFORMATION

Overall diameter	92 mm (3,6 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø 76 mm (3 in)
Bolt circle diameter	76 mm (3 in)
Total depth	53 mm (2,1 in)
Net weight	1,1 Kg (2,4 lb)
Shipping weight	1,3 Kg (2,9 lb)
CardBoard Packaging dimensions	140x121x64 mm (5.5 x 4.8 x 2.5 in)

FREE AIR IMPEDANCE MAGNITUDE CURVE

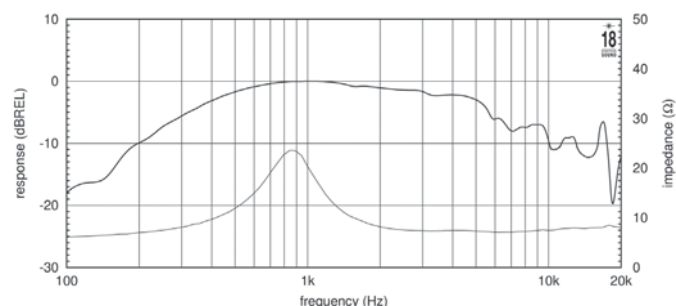

ND1085 FREQUENCY RESPONSE MEASURED WITH 1W INPUT ON RATED IMPEDANCE ON CENTRAL FORWARD AXIS IN A REFLECTION FREE ENVIRONMENT. THIN LINE REPRESENTS IMPEDANCE MEASURED IN SAME CONDITIONS

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XT1086 horn, averaged between 1 kHz and 4 kHz.

HF Neodymium Driver


109 dB SPL 1W / 1m average sensitivity
1 inch exit throat
44 mm (1 3/4 inch) edgewound aluminum voice coil
100 Watt program power handling
Titanium dome over polyester suspension
Proprietary phase plug design
Neodymium magnetic structure
Excellent thermal exchange



GENERAL SPECIFICATIONS

Throat Diameter	25,4 mm (1 in)
Rated Impedance	8 Ohm
DC Resistance	5,3 Ohm
Minimum Impedance	7 Ohm at 4000Hz
Le (at 1kHz)	67 µH
AES Power (1)	50 W above 1,6 kHz
Program Power (2)	100 W above 1,6 kHz
Sensitivity (3)	109 dB
Frequency Range	1600Hz - 20kHz
Recomm. Xover Frequency	1600Hz (12dB/oct slope)
Diaphragm Material	Titanium - Polyethylene
Voice Coil Diameter	44,4 mm (1 3/4 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium

FREQUENCY RESPONSE CURVE

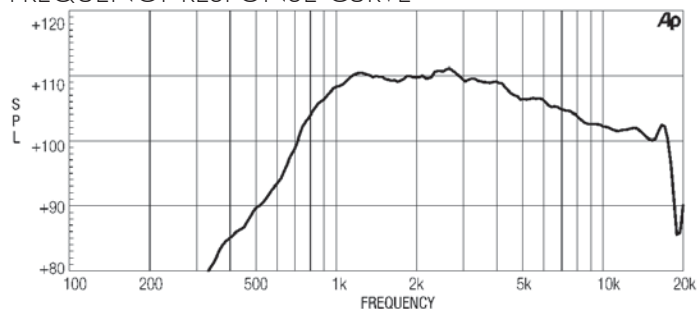


ND1070 MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1M DISTANCE ON XT1086 HORN MOUTH AXIS

MOUNTING INFORMATION

Overall diameter	98 mm (3,9 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø 76 mm (3 in)
Bolt circle diameter	76 mm (3 in)
Total depth	53 mm (2,1 in)
Net weight	1,1 Kg (2,4 lb)
Shipping weight	1,2 Kg (2,6 lb)
CardBoard Packaging dimensions	97x97x58 mm (3,8x3,8x2,3 in)

FREE AIR IMPEDANCE MAGNITUDE CURVE

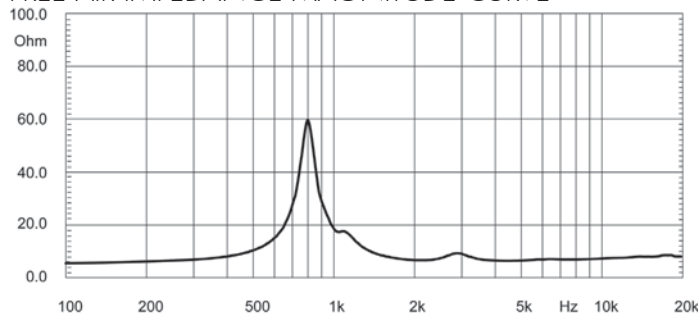

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XT1086 horn averaged between 1kHz and 4kHz.

ND1018BT

HF Neodymium Transducer


1 inch exit throat
 108 dB SPL 1W / 1m average sensitivity
 44 mm (1 3/4 inch) voice coil
 100 Watt program power handling
 Titanium diaphragm
 Neodymium magnet structure
 Proprietary Phase Plug design



GENERAL SPECIFICATIONS

Throat Diameter	25,4 mm (1 in)
Rated Impedance	8 Ohm
DC Resistance	5,3 Ohm
Minimum Impedance	7 Ohm at 4000 Hz
Le (at 1kHz)	67 µH
AES Power (1)	50 W above 1,6 kHz
Program Power (2)	100 W above 1,6 kHz
Sensitivity (3)	108 dB
Frequency Range	1600Hz - 20kHz
Recomm. Xover Frequency	1600Hz (12dB/oct slope)
Diaphragm Material	Titanium
Voice Coil Diameter	44,4 mm (1 3/4 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium

FREQUENCY RESPONSE CURVE

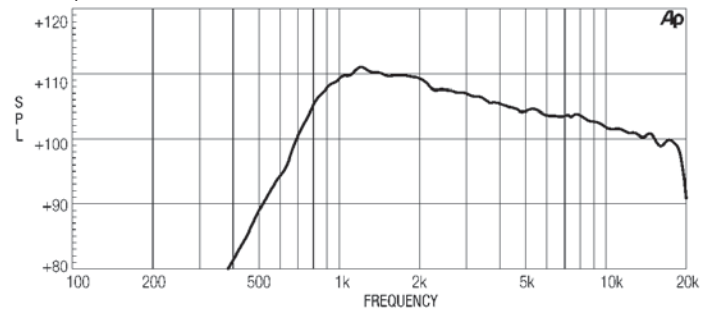


ND1018BT MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1M DISTANCE ON XT1086 HORN MOUTH AXIS

MOUNTING INFORMATION

Overall diameter	98 mm (3,9 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø 76 mm (3 in)
Bolt circle diameter	76 mm (3 in)
Total depth	50 mm (2 in)
Net weight	1 Kg (2,2 lb)
Shipping weight	1,2 Kg (2,6 lb)
CardBoard Packaging dimensions	97x97x58 mm (3,8x3,8x2,3 in)

FREE AIR IMPEDANCE MAGNITUDE CURVE

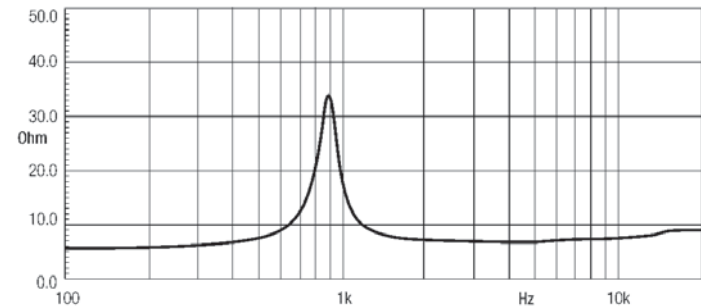

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XT1086 horn averaged between 1kHz and 4kHz.

ND1050

HF Neodymium Transducer


110 dB SPL 1W / 1m average sensitivity
 1 inch exit throat
 44mm (1 3/4 inch) voice coil diameter
 100 Watt program power handling
 Neodymium magnet structure
 Titanium dome over PEN suspension
 Ultra compact size - 75mm external diameter
 Proprietary phase plug design
 Ideal for multiple HF line arrays



GENERAL SPECIFICATIONS

Throat Diameter	25,4 mm (1 in)
Rated Impedance	8 Ohm
DC Resistance	5,3 Ohm
Minimum Impedance	6,9 Ohm at 2000Hz
Le (at 1kHz)	67 µH
AES Power (1)	50 W above 1,6 kHz
Program Power (2)	100 W above 1,6 kHz
Sensitivity (3)	110 dB
Frequency Range	1600Hz - 20kHz
Recomm. Xover Frequency	1600Hz (12dB/oct slope)
Diaphragm Material	Titanium - PEN
Voice Coil Diameter	44,4 mm (1 3/4 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium

FREQUENCY RESPONSE CURVE

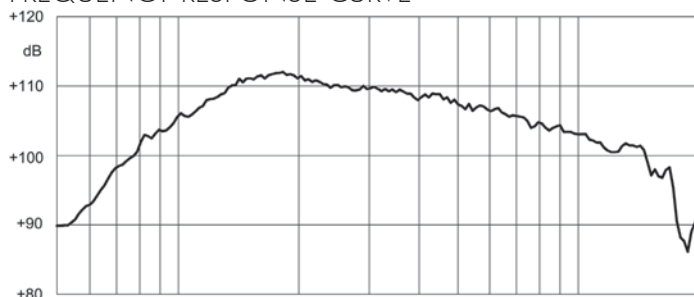


ND1050 MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1M DISTANCE ON XT1086 HORN MOUTH AXIS.

MOUNTING INFORMATION

Overall diameter	75 mm (3 in)
N. of mounting holes and bolt	3 M5 holes 120°
Bolt circle diameter	57 mm (2.2 in)
Total depth	41 mm (1.6 in)
Net weight	0,65 kg (1.45 lb)
Shipping weight	0,8 Kg (1,75 lb)
CardBoard Packaging dimensions	97x97x58 mm (3,8x3,8x2,3 in)

FREE AIR IMPEDANCE MAGNITUDE CURVE

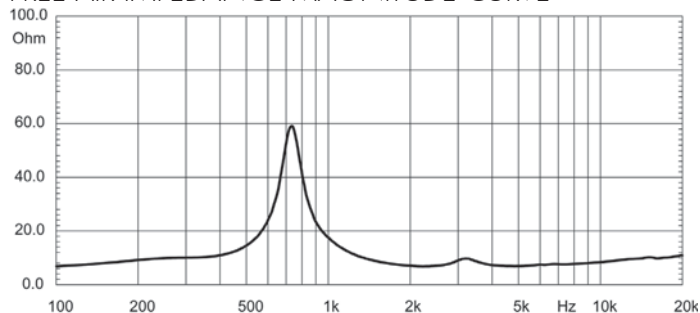

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XT1086 horn averaged between 1kHz and 4kHz.

ND1030

HF Neodymium Driver


107 dB SPL 1W / 1m average sensitivity
 1 inch exit throat
 34,4 mm (1 1/3 inch) voice coil diameter
 60 Watt program power handling
 Pure Titanium diaphragm
 Proprietary phase plug design
 Neodymium magnetic structure



GENERAL SPECIFICATIONS

Throat Diameter	25,4 mm (1 in)
Rated Impedance	8 Ohm
DC Resistance	5,8 Ohm
Minimum Impedance	6,5 Ohm at 5000Hz
Le (at 1kHz)	54 μH
AES Power (1)	30 W above 2 kHz
Program Power (2)	60 W above 2 kHz
Sensitivity (3)	107 dB
Frequency Range	1800Hz - 20kHz
Recomm. Xover Frequency	1800Hz 12dB/oct slope
Diaphragm Material	Titanium
Voice Coil Diameter	34,4 mm (1 1/3 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium

FREQUENCY RESPONSE CURVE

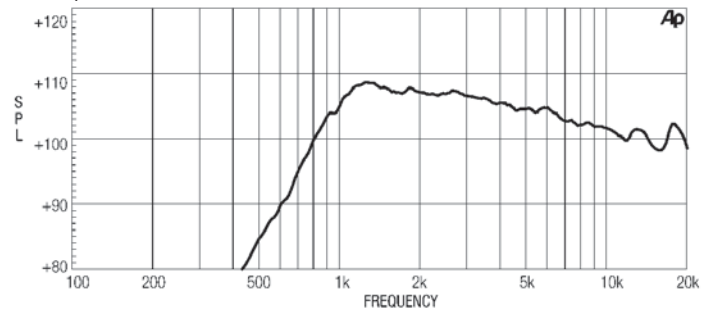


ND1030 MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1M DISTANCE ON XT1086 HORN MOUTH AXIS.

MOUNTING INFORMATION

Overall diameter	85 mm (3,3 in)
N. of mounting holes and bolt	2 M5 holes on Ø 76 mm (3 in)
Bolt circle diameter	58 mm (2,3 in)
Total depth	40,5 mm (1,6 in)
Net weight	0,8 kg (1,75 lb)
Shipping weight	0,9 Kg (1,97 lb)
CardBoard Packaging dimensions	97x97x58 mm (3,8x3,8x2,3 in)

FREE AIR IMPEDANCE MAGNITUDE CURVE

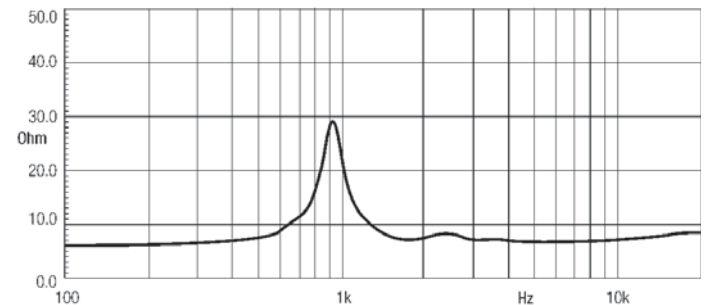

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XT1086 horn, averaged between 1 kHz and 4 kHz.



HF DRIVERS - FERRITE



HD2080T

HF Compression Driver

109 dB SPL 1W / 1m average sensitivity
 2 inch exit throat
 3 inch edgewound aluminum voice coil
 200W program power handling
 Polyethylene - Titanium diaphragm assembly
 Copper shorting ring on pole pieces

GENERAL SPECIFICATIONS


Throat Diameter	50 mm (2 in)
Rated Impedance	8 Ohm
DC Resistance	6,2 Ohm
Minimum Impedance	8 Ohm at 3500Hz
AES Power (1)	100W above 1,2 kHz
Program Power (2)	200W above 1,2 kHz
Sensitivity (3)	109 dB
Frequency Range	500Hz - 20kHz
Recomm. Xover Frequency	above 800Hz (12dB/oct slope)
Diaphragm Material	Titanium - Polyethylene
Voice Coil Diameter	75 mm (3 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Ferrite
Flux Density	1,8 T
BL Factor	12,8 N/A
Polarity	Positive voltage on + terminal gives positive pressure in the throat

MOUNTING INFORMATION

Overall diameter	169 mm (6,65 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø 102 mm (4 in)
Bolt circle diameter	102 mm (4 in)
Total depth	75,4 mm (3 in)
Net weight	5,3 Kg (11,60 lb)
Shipping weight	5,5 Kg (12,10 lb)
CardBoard Packaging dimensions	170x170x80 mm (6,7x6,7x3,2 in)




FREQUENCY RESPONSE CURVE

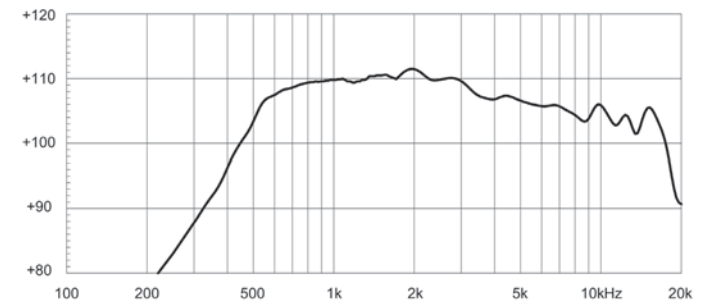

HD2080T MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1M DISTANCE ON XR2064 HORN MOUTH AXIS

FREE AIR IMPEDANCE MAGNITUDE CURVE

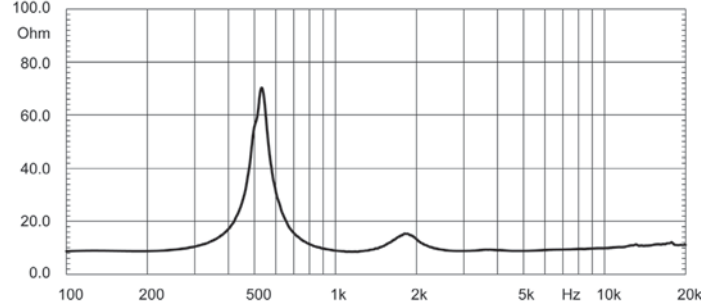

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XR2064 horn, averaged between 1kHz and 4 kHz.



HD1480T

HF Compression Driver

109 dB SPL 1W / 1m average sensitivity
1.4 inch exit throat
3 inch edgewound aluminum voice coil
200W program power handling
Polyethylene - Titanium diaphragm assembly
Copper shorting ring on pole pieces

GENERAL SPECIFICATIONS


Throat Diameter	35.5 mm (1.4 in)
Rated Impedance	8 Ohm
DC Resistance	6,2 Ohm
Minimum Impedance	8 Ohm at 3500Hz
AES Power (1)	100W above 1,2 kHz
Program Power (2)	200W above 1,2 kHz
Sensitivity (3)	109 dB
Frequency Range	500Hz - 20kHz
Recomm. Xover Frequency	above 800Hz (12 dB/oct slope)
Diaphragm Material	Titanium - Polyethylene
Voice Coil Diameter	75 mm (3 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Ferrite
Flux Density	1,8 T
BL Factor	12,8 N/A
Polarity	Positive voltage on + terminal gives positive pressure in the throat

MOUNTING INFORMATION

Overall diameter	169 mm (6,65 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø 102 mm (4 in)
Bolt circle diameter	102 mm (4 in)
Total depth	75,4 mm (3 in)
Net weight	5,3 Kg (11,60 lb)
Shipping weight	5,5 Kg (12,10 lb)
CardBoard Packaging dimensions	170x170x80 mm (6,7x6,7x3,2 in)




FREQUENCY RESPONSE CURVE

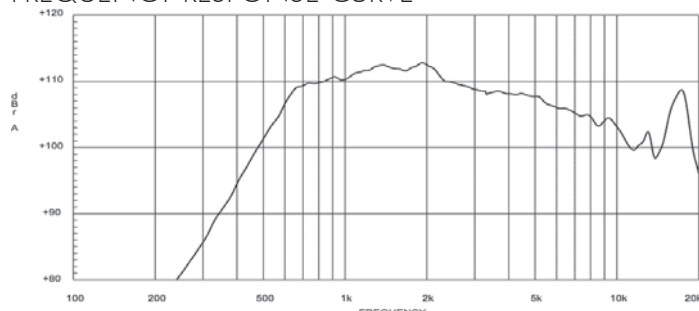

HD1480T MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1M DISTANCE ON XR1464 HORN MOUTH AXIS

FREE AIR IMPEDANCE MAGNITUDE CURVE

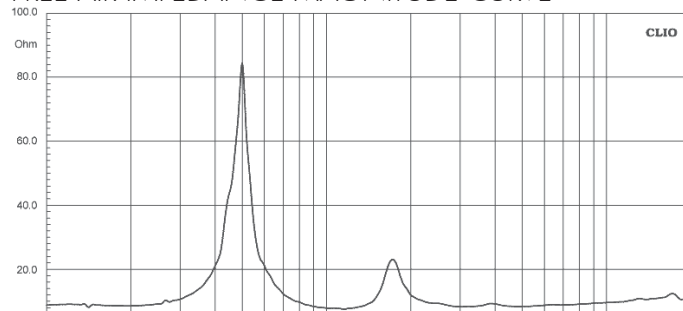

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of the horn, averaged between 1kHz and 4 kHz.

HF Compression Driver

Best performance to price 1.4" exit driver on the market
 108 dB 1W / 1m average sensitivity
 1.4 inch throat exit
 2.4 inch edgewound aluminum voice coil
 140 W program power handling
 Pure Titanium diaphragm assembly
 Proprietary phase plug design
 HF copper sleeve for reduced distortion and increased output

GENERAL SPECIFICATIONS


Throat Diameter	35,5 mm (1.4 in)
Rated Impedance	8 Ohm
DC Resistance	5,9 Ohm
Minimum Impedance	7,6 Ohm at 5100Hz
Continuous Power (1)	70 W
Maximum Program Power	140 W
Sensitivity (2)	108 dB
Frequency Range	1000Hz - 20kHz
Recomm. Xover Frequency	1100 Hz (24 dB/oct slope)
Diaphragm Material	Titanium
Voice Coil Diameter	61 mm (2.4 in)
Voice Coil Winding Material	Edge-wound aluminum Ribbon
Magnet Material	Ferrite
Flux Density	1,6 T

MOUNTING INFORMATION

Overall diameter	145 mm (5,7in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø 102 mm (4 in)
Bolt circle diameter	102 mm (4 in)
Total depth	65 mm (2.56 in)
Net weight	3.4 Kg (7.50 lb)
Shipping weight	3.6 Kg (7.94 lb)
CardBoard Packaging dimensions	132x132x68 mm (5.20x5.20x2.68 in)




FREQUENCY RESPONSE CURVE

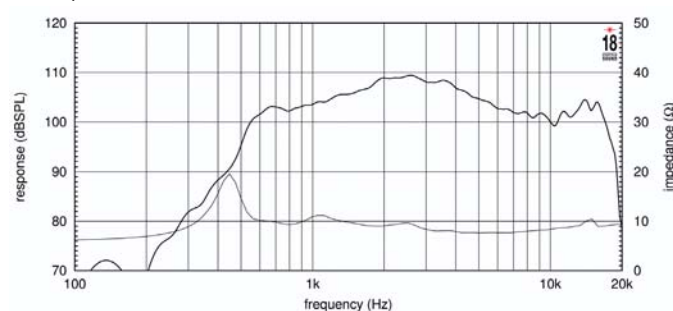

FREQUENCY RESPONSE MEASURED WITH 2,83 V INPUT ON AXIS AT 1 METER DISTANCE FROM THROAT OF XR1464 HORN. IMPEDANCE MEASURED ON SAME HORN D2000 MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1M DISTANCE ON XR2064 HORN MOUTH AXIS

FREE AIR IMPEDANCE MAGNITUDE CURVE

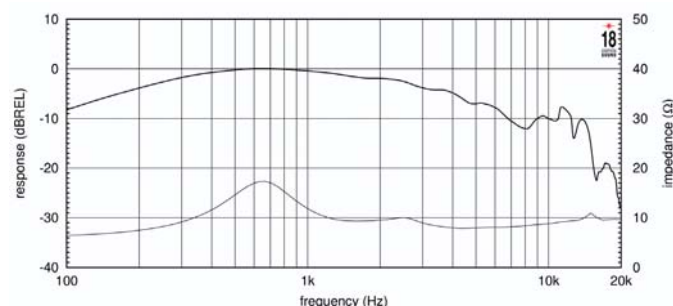

FREQUENCY RESPONSE MEASURED WITH 77,5 mV INPUT ON 1,4 in PLANE WAVE TUBE. IMPEDANCE MEASURED ON SAME PLANE WAVE TUBE REE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XR2064 horn, averaged between 1kHz and 4 kHz.

FD HD1050

HF Compression Driver

107 dB SPL 1W / 1m average sensitivity
 1 inch exit throat
 44 mm (1 3/4 inch) voice coil diameter
 100 Watt program power handling
 Titanium dome over PEN suspension
 Proprietary phase plug design

GENERAL SPECIFICATIONS


Throat Diameter	25,4 mm (1 in)
Rated Impedance	8 Ohm
DC Resistance	5,3 Ohm
Minimum Impedance	7 Ohm at 4000Hz
AES Power (1)	50 W above 1,6 kHz
Program Power (2)	100 W above 1,6 kHz
Sensitivity (3)	107 dB
Frequency Range	1600Hz - 20kHz
Recomm. Xover Frequency	1600Hz (12dB/oct slope)
Diaphragm Material	Titanium - PEN
Voice Coil Diameter	44,4 mm (1 3/4 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Ferrite
Flux Density	1,6 T
BL Factor	7,4 N/A
Polarity	Positive voltage on + terminal gives positive pressure in the throat

MOUNTING INFORMATION

Overall diameter	110 mm (4,3 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø 76 mm (3 in)
Bolt circle diameter	76 mm (3 in)
Total depth	60,5 mm (2,38 in)
Net weight	1,8 Kg (4 lb)
Shipping weight	1,9 Kg (4,22 lb)
CardBoard Packaging dimensions	110x110x63 mm (4,3x4,3x2,5 in)




FREQUENCY RESPONSE CURVE

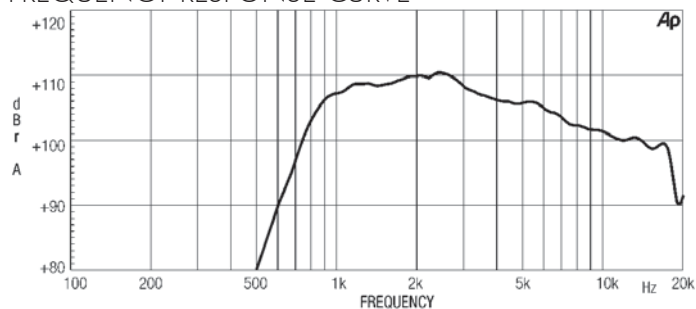

HD1050 MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1M DISTANCE ON XT1086 HORN MOUTH AXIS

FREE AIR IMPEDANCE MAGNITUDE CURVE

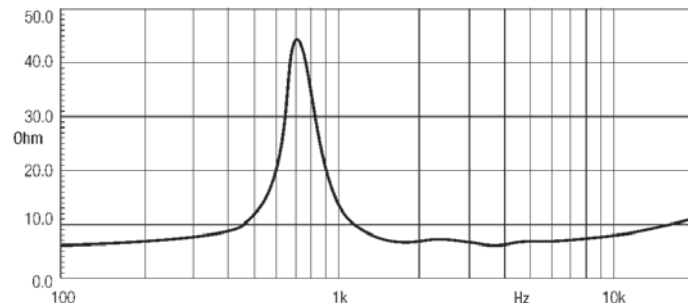

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XT1086 horn, averaged between 1kHz and 4 kHz.

HD1040

HF Compression Driver


1 inch exit throat
 107 dB SPL 1W / 1m average sensitivity
 44mm (1 3/4 inch) voice coil diameter
 80 Watt program power handling
 Treated polyethylene diaphragm
 Proprietary phase plug design



GENERAL SPECIFICATIONS

Throat Diameter	25,4 mm (1 in)
Rated Impedance	8 Ohm
DC Resistance	5,3 Ohm
Minimum Impedance	7 Ohm at 4000Hz
AES Power (1)	40 W above 1,6 kHz
Program Power (2)	80 W above 1,6 kHz
Sensitivity (3)	107 dB
Frequency Range	1600Hz - 20kHz
Recomm. Xover Frequency	1600Hz (12dB/oct slope)
Diaphragm Material	Treated polyethylene
Voice Coil Diameter	44,4 mm (1 3/4 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Ferrite
Flux Density	1,6 T
BL Factor	7,4 N/A
Polarity	Positive voltage on + terminal gives positive pressure in the throat

FREQUENCY RESPONSE CURVE

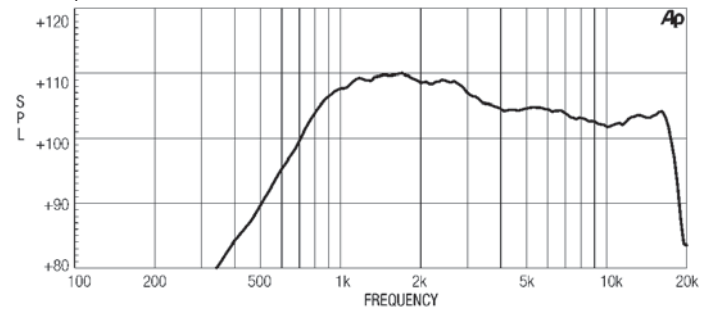


HD1040 MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1M DISTANCE ON XT1086 HORN MOUTH AXIS

MOUNTING INFORMATION

Overall diameter	110 mm (4,3 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø 76 mm (3 in)
Bolt circle diameter	76 mm (3 in)
Total depth	60,5 mm (2,38 in)
Net weight	1,8 Kg (4 lb)
Shipping weight	1,9 Kg (4,22 lb)
CardBoard Packaging dimensions	110x110x63 mm (4,3x4,3x2,5 in)

FREE AIR IMPEDANCE MAGNITUDE CURVE

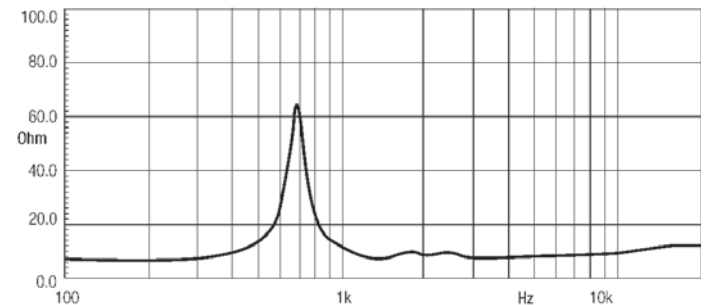

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XT1086 horn, averaged between 1kHz and 4 kHz.

FD HD1030

HF Compression Driver


1 inch exit throat
 106 dB SPL 1W / 1m average sensitivity
 34,4 mm (1 1/3 inch) voice coil diameter
 60 Watt program power handling
 Titanium diaphragm
 Proprietary phase plug design
 Usable in two way or multiway systems



GENERAL SPECIFICATIONS


Throat Diameter	25,4 mm (1 in)
Rated Impedance	8 Ohm
DC Resistance	5,8 Ohm
Minimum Impedance	6,5 Ohm at 5000Hz
Le (at 1kHz)	54 µH
AES Power (1)	30 W above 2 kHz
Program Power (2)	60 W above 2 kHz
Sensitivity (3) (1W@1m)	106 dB
Frequency Range	1800Hz - 20kHz
Recomm. Xover Frequency	1800Hz 12dB/oct slope
Diaphragm Material	Titanium
Voice Coil Diameter	34,4 mm (1 1/3 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Ferrite
Flux Density	1,5 T
BL Factor	5 N/A

FREQUENCY RESPONSE CURVE

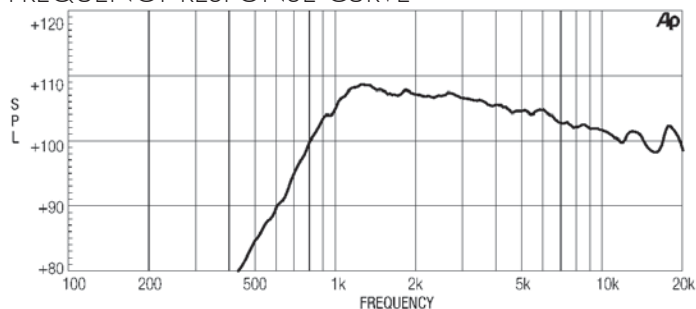

HD1030 MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1M DISTANCE ON XT1086 HORN MOUTH AXIS

FREE AIR IMPEDANCE MAGNITUDE CURVE

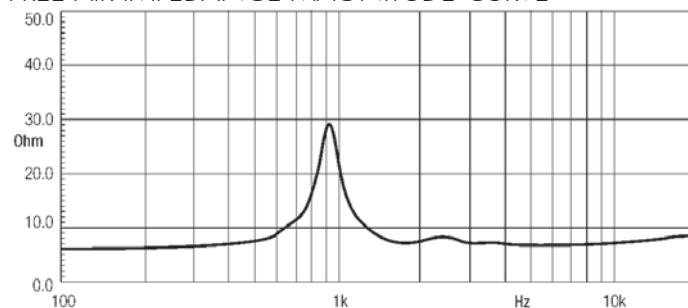

MOUNTING INFORMATION

Overall diameter	91 mm (3.6 in)
N. of mounting holes and bolt	4 M5 holes on Ø 76 mm (3 in)
Bolt circle diameter	76 mm (3 in)
Total depth	51 mm (2 in)
Net weight	1 kg (2.18 lb)
Shipping weight	1.2 Kg (2.61 lb)
CardBoard Packaging dimensions	97x97x58 mm (3,8x3,8x2,3 in)

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XT1086 horn, averaged between 1kHz and 4 kHz.

HD125

HF Compression Driver


1 inch exit throat
 109 dB SPL 1W / 1m average sensitivity
 25,4 mm (1 in) edgewound aluminum voice coil
 50 Watt program power handling
 Low weight, easy mounting and handling structure
 Usable in two way or multiway systems

GENERAL SPECIFICATIONS

Throat Diameter	25,4 mm (1 in)
Rated Impedance	8 Ohm
DC Resistance	5,7 Ohm
Minimum Impedance	8 Ohm 5000Hz
AES Power (1)	25 W above 2,5 kHz
Program Power (2)	50 W above 2,5 kHz
Sensitivity (3)	109 dB
Frequency Range	2 kHz - 18 kHz
Recomm. Xover Frequency	2500 Hz (12dB/oct slope)
Diaphragm Material	Polyester
Voice Coil Diameter	25,4 mm (1 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Ferrite
Flux Density	1,65 T
BL Factor	3,5 N/A
Polarity	Positive voltage on + terminal gives positive pressure in the throat




FREQUENCY RESPONSE CURVE

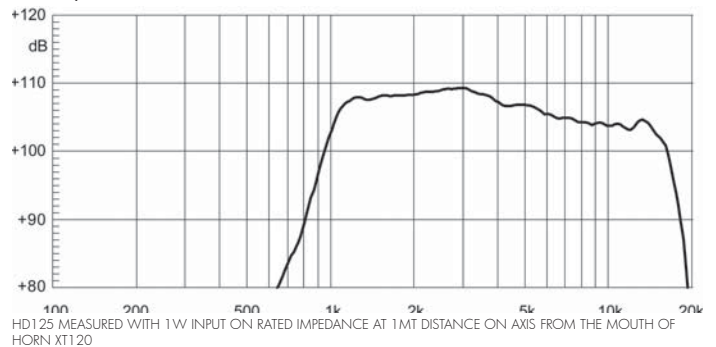

MOUNTING INFORMATION

Overall diameter	87 mm (3,4 in)
N. of mounting holes and bolt	2 M5 at 180 degrees
Bolt circle diameter	76 mm (3 in)
Total depth	46 mm (1,8 in)
Net weight	0,8 Kg (1,77 lb)
Shipping weight	0,9 Kg (1,99 lb)
CardBoard Packaging dimensions	90x90x70 mm(3,5x3,5x2,8 in)

FREE AIR IMPEDANCE MAGNITUDE CURVE

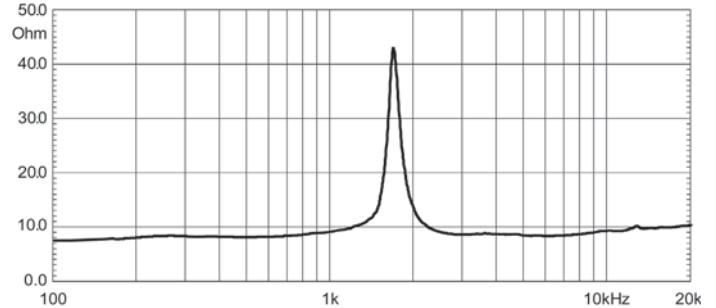

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XT120 horn, averaged between in the 3 kHz octave band

FD XD125

HF Compression Driver

1 inch exit throat
 108 dB SPL 1W/1m average sensitivity
 25,4 mm (1 in) edgewound aluminum voice coil
 50 Watt program power handling
 Low weight, easy mounting and handling structure
 Usable in two way or multiway systems
 90° x 60° coverage Constant directivity pattern
 Unique Eighteen Sound elliptical shape

GENERAL SPECIFICATIONS


Throat Diameter	25,4 mm (1 in)
Rated Impedance	8 Ohm
DC Resistance	5,7 Ohm
Minimum Impedance	8 Ohm 5000Hz
AES Power (1)	25 W above 2,5 kHz
Program Power (2)	50 W above 2,5 kHz
Sensitivity (3) (1W@1m)	109 dB
Frequency Range	2 kHz - 18 kHz
Recomm. Xover Frequency	2500 Hz (12dB/oct slope)
Diaphragm Material	Polyester
Voice Coil Diameter	25,4 mm (1 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Ferrite
Flux Density	1,65 T
BL Factor	3,5 N/A
Polarity	Positive voltage on + terminal gives positive pressure in the throat

MOUNTING INFORMATION


Overall diameter	87 mm (3,4 in)
N. of mounting holes and bolt	2 M5 at 180 degrees
Bolt circle diameter	76 mm (3 in)
Total depth	46 mm (1,8 in)
Net weight	0,8 Kg (1,77 lb)
Shipping weight	0,9 Kg (1,99 lb)
CardBoard Packaging dimensions	90x90x70 mm(3,5x3,5x2,8 in)



FREQUENCY RESPONSE CURVE

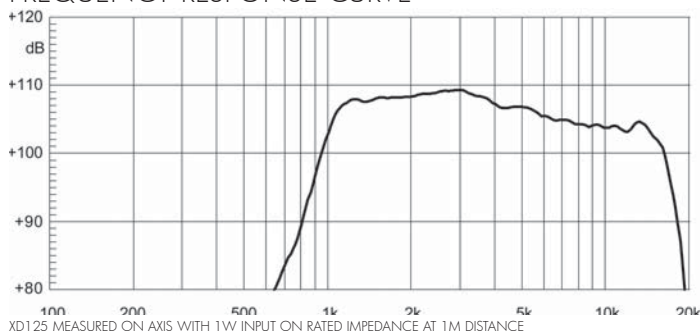

FREE AIR IMPEDANCE MAGNITUDE CURVE

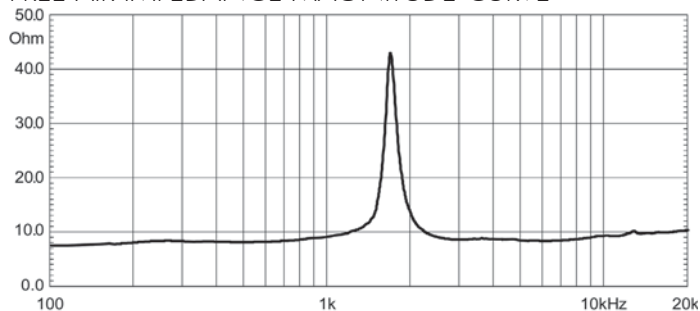

NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.



COAXIALS





15CX1000

High Output Coaxial Transducer

98dB LF / 107,5dB HF SPL 1W/1m average sensitivity
 100 mm (4") Interleaved Sandwich Voice LF coil (ISV)
 850W LF - 100W HF AES power handling
 Copper shorting ring for constant power transfer
 1,4" exit HF neodymium compression driver
 75 mm (3") HF edgewound voice coil with high temperature ferrofluid
 FEA optimized coupling horn profile
 70 degrees nominal conical dispersion
 Suitable for very compact enclosures and stage monitors
 Weather protected cone and plates for outdoor usage

LF GENERAL SPECIFICATIONS

Nominal Diameter	380 mm (15 in)
Rated Impedance	8 Ohm
AES Power (1)	8500W
Program Power (2)	1000W
Peak Power (3)	3000W
Sensitivity (4)	98 dB
Frequency Range (5)	45 - 5100 Hz
Power Compression @-10dB (6)	0,9 dB
Power Compression @-3dB	2,1 dB
Power Compression @Full Power	3,8 dB
Max Recomm. Frequency	1000 Hz
Recomm. Enclosure Volume	70 - 150 lt. (2.47 - 5.3 cuft)
Minimum Impedance	6 Ohm at 25°C
Max Peak To Peak Excursion	39 mm (1.53 in)
Voice Coil Diameter	100 mm (4 in)
Voice Coil Technology	Aluminum
Suspension	Triple Roll, Polycotton
Cone	Straight ribbed carbon fiber loaded cellulose

HF GENERAL SPECIFICATIONS

D.C. Resistance	6,2 Ohm
AES Power (7)	100W above 1,2 kHz
Program power (8)	200W above 1,2 kHz
Sensitivity (9)	107,5 dB
Frequency Range	0.5 ÷ 20 kHz
Recomm. Xover Frequency	1 kHz 12 dB/oct
Voice Coil Diameter	74,6 mm (3 in)

THIELE SMALL PARAMETERS (10)


Fs	48 Hz
Re	5,5 Ohm
Sd	0,0855 sq.mt. (132.5 sq.in.)
Qms	6
Qes	0,32
Qts	0,31
Vas	132.5 lt. (4.66 cuft)
Mms	85 gr. (0,19 lb)
BL	21 Tm
Linear Mathematical Xmax (11)	±6 mm (±0.24 in)
Le (1kHz)	1.5 mH
Ref. Efficiency 1W@1m (half space)	98.4 dB

MOUNTING INFORMATION

Overall diameter	387 mm (15.23 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7.15 mm (0,28 in)
Bolt circle diameter	370-371 mm (14,55-14,6 in)
Front mount baffle cutout Ø	353 mm (13.9 in)
Rear mount baffle cutout Ø	357 mm (14.06 in)
Total depth	218.4 mm (8.6in)
Flange and gasket thickness	19.5 mm (0,76 in)
Net weight	14.4 kg (31.68 lb)
Shipping weight	15 kg (34,1 lb)
CardBoard Packaging dimensions	405 x 405 x 230 mm (15,94 x 15,94 x 9,05 in)




FREQUENCY RESPONSE CURVE

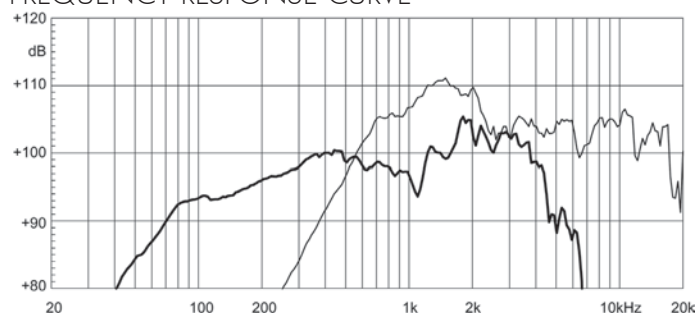

FREQUENCY RESPONSE CURVE OF 15CX1000 MADE ON 125 LT ENCLOSURE TUNED 50HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THIN LINE REPRESENTS HIGH FREQUENCY RESPONSE.

FREE AIR IMPEDANCE MAGNITUDE CURVE

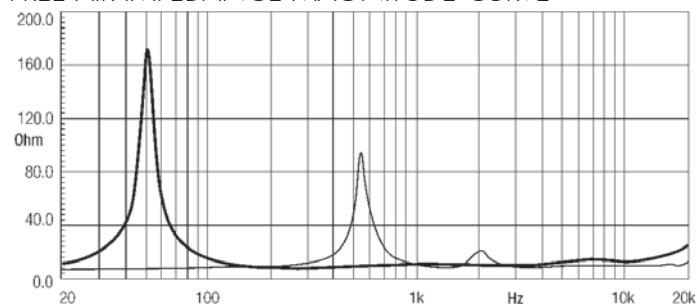

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 125 lit enclosure tuned 50Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) The peak power rating represents the maximum permitted instantaneous peak power level over a maximum period of 10ms which will be withstood by the loudspeaker without damage.
- (4) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (5) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (6) Power compression represents the loss of sensitivity for the specified power, measured from 50-500 Hz, after a 5 min pink noise preconditioning test at the specified power.
- (7) AES power rating is measured with a pink noise input having a 6 dB crest factor for two hours duration, per AES standard. Power calculated on minimum impedance.
- (8) Program power is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- (9) Sensitivity is measured on 1W input on rated impedance at 1m on axis from the mouth of the woofer and averaged in 3kHz band.
- (10) Thiele - Small parameters are measured after the test specimen has been conditioned by 500 W AES power and represent the expected long term parameters after a short period of use.
- (11) Linear Math. Xmax is calculated as $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is gap depth.

Coaxial Transducer Single Magnet

98 dB LF / 109 dB HF SPL 1W/1m average sensitivity
 Single magnet neodymium motor
 800W LF - 240W HF maximum program power handling
 Smooth on/off axis 90° x 50° response
 75 mm (3") Interleaved Sandwich LF Voice coil (ISV)
 Aluminum Demodulating Ring (SDR) for minimum LF distortion
 60 mm (2.4") HF pure Titanium diaphragm
 Edge-wound Aluminum ribbon HF voice coil (EWAL)
 HF copper sleeve for reduced distortion and higher output
 Smooth on/off axis 90° x 50° response
 Suitable for compact enclosures and stage monitors

LF GENERAL SPECIFICATIONS

Nominal Diameter	380 mm (15 in)
Rated Impedance	8 Ohm
AES Power (1)	400W
Program Power (2)	800W
Peak Power (3)	1600W
Sensitivity (4)	98 dB
Frequency Range (5)	50 - 3700 Hz
Power Compression @10dB (6)	0.9 dB
Power Compression @3dB	2.8 dB
Power Compression @Full Power	4.2 dB
Max Recomm. Frequency	1400 Hz
Recomm. Enclosure Volume	80 - 140 lt. (2.83 - 4.95 cuft)
Minimum Impedance	6.3 Ohm at 25°C
Max Peak To Peak Excursion	27 mm (1.06 in)
Voice Coil Diameter	75 mm (2.95 in)
Voice Coil Technology	Copper
Suspension	Triple Roll, Polycotton
Cone	Curvilinear, Water repellent, High damping pulp

HF GENERAL SPECIFICATIONS

D.C. Resistance	6,1 Ohm
AES Power (7)	120W above 1,2 kHz
Program power (8)	240W above 1,2 kHz
Sensitivity (9)	109 dB
Frequency Range	0.6 ÷ 19 kHz
Recomm. Xover Frequency (10)	1.1 kHz
Diaphragm material	Titanium
Voice Coil Diameter	60 mm
Voice Coil Winding Material	Edge-wound aluminum
Magnet material	Neodymium

THIELE SMALL PARAMETERS (11)

Fs	49 Hz
Re	5,4 Ohm
Sd	0,0881 sq.mt. (136.56 sq.in.)
Qms	6.32
Qes	0,40
Qts	0,37
Vas	141 lt. (4.98 cuft)
Mms	80,6 gr. (0,18 lb)
BL	18 Tm
Linear Mathematical Xmax (12)	± 5.5 mm (±0,22 in)
le (1kHz)	0.66 mH
Ref. Efficiency 1W@1m (half space)	98,3 dB


MOUNTING INFORMATION

Overall diameter	393 mm (15,47 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7.15 mm (0,28 in)
Bolt circle diameter	371 mm (14,61 in)
Front mount baffle cutout Ø	360 mm (14.17 in)
Rear mount baffle cutout Ø	354 mm (13.94 in)
Total depth	185 mm (7.28 in)
Flange and gasket thickness	14 mm (0,55 in)
Net weight	5.3 kg (11.68 lb)
Shipping weight	6.2 kg (13.67 lb)
CardBoard Packaging dimensions	405 x 405 x 260 mm (15,94x15,94x10.24 in)




AVAILABLE
ALSO WITHOUT
HORN

FREQUENCY RESPONSE CURVE

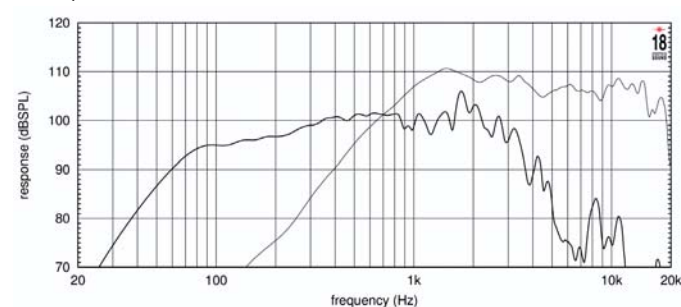

FREQUENCY RESPONSE MADE IN 125 lt. ENCLOSURE TUNED AT 50 Hz IN FREE FIELD (4n) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER, THE THIN LINE REPRESENTS HIGH FREQUENCY FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

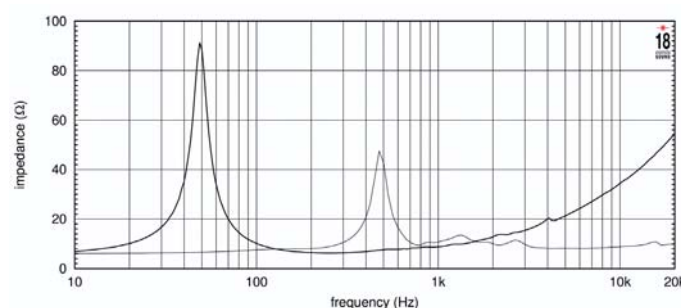

NOTES

- 1) According to AES2-1984 (r2003) standard
- 2) Program power rating is measured in 125 lit. enclosure tuned at 50 Hz using a 50-500Hz band limited pink noise test signal applied for 2 hours and with 50% duty cycle. Power measured on minimum impedance.
- 3) The peak power ratings represent the maximum permitted instantaneous peak power level over a maximum period of 10ms which will be withstood by the loudspeaker without damage.
- 4) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1 m from the baffle panel, when connected to 2.83V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for 2 above.
- 5) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- 6) Power compression represents the loss of sensitivity for the specified power, measured from 50-500 Hz, after a 5 min pink noise preconditioning test at the specified power.
- 7) Continuous Power is defined as a level that is 3 dB greater than the one measured with the new AES2-2012 standard, using continuous pink noise having 12 dB crest factor for 2 hours.
- 8) Program power rating is defined as 3 dB greater than continuous power rating.
- 9) Sensitivity represents the average value of acoustic output as measured on the speaker axis at a distance of 1 m, when connected to 2.83 V sine wave swept between 1000-4000 Hz
- 10) Minimum crossover frequency require at least 18 dB/oct slope high pass filter, preferred 24dB/oct slope high pass filter LR
- 11) Thiele - Small parameters are measured after the test specimen has been conditioned by 1 hour 20 Hz sine and represent the expected long term parameters after a short period of use
- 12) linear Math. Xmax is calculated as $(Hvc \cdot Hg) / 2 + Hg / 4$ where Hvc is the coil depth and Hg is gap depth.



12NCX750H

NEW

Coaxial Transducer Single Magnet

97dB LF / 110dB HF SPL 1W/1m average sensitivity
Single magnet neodymium motor
800W LF - 240W HF maximum program power handling
75 mm (3") LF Interleaved Sandwich Voice coil (ISV)
Aluminum demodulating ring (SDR) for minimum LF distortion
60 mm (2.4") HF Titanium diaphragm
Edge-wound Aluminum ribbon HF voice coil (EWAL)
HF copper sleeve for reduced distortion and higher output
80 degrees nominal conical dispersion

Suitable for very compact enclosures and stage monitor

LF GENERAL SPECIFICATIONS

Nominal Diameter	300 mm (12 in)
Rated Impedance	8 Ohm
AES Power (1)	400W
Program Power (2)	800W
Peak Power (3)	1600W
Sensitivity (4)	97 dB
Frequency Range (5)	60 ÷ 2800 Hz
Power Compression @-10dB (6)	0.9 dB
Power Compression @-3dB	2.8 dB
Power Compression @Full Power	4.2dB
Max Recomm. Frequency	1800 Hz
Recomm. Enclosure Volume	40 ÷ 90 lt. (1,41 ÷ 3,18 cuft)
Minimum Impedance	6 Ohm at 25°C
Max Peak To Peak Excursion	27 mm (1.06 in)
Voice Coil Diameter	75 mm (2.95 in)
Voice Coil Technology	Copper
Suspension	Triple Roll, Polycotton
Cone	Curvilinear, Water repellent, High damping pulp

HF GENERAL SPECIFICATIONS

D.C. Resistance	6,1 Ohm
Continuous power (7)	120W
Program power (8)	240W
Sensitivity (9)	110 dB
Frequency Range	750 ÷ 18800 Hz
Recomm. Xover Frequency (10)	1.1 kHz
Diaphragm material	Titanium
Voice Coil Diameter	60 mm
Voice Coil Winding Material	Edge-wound aluminum
Magnet material	Neodymium

THIELE SMALL PARAMETERS (11)

Fs	58 Hz
Re	5,4 Ohm
Sd	0,0531 sq.mt. (82.31 sq.in.)
Qms	6.42
Qes	0,31
Qts	0,29
Vas	63 lt. (2.23 cuft)
Mms	47.6 gr. (0,10 lb)
BL	17 Tm
Linear Mathematical Xmax (11)	± 5.5 mm (±0,22 in)
le (1kHz)	0.62 mH
Ref. Efficiency 1W@1m (half space)	98 dB


MOUNTING INFORMATION

Overall diameter	310 mm (12.20 in)
N. of mounting holes and bolt	8
Mounting holes diameter	5.9 mm (0,23 in)
Bolt circle diameter	295 mm (11.61 in)
Front mount baffle cutout Ø	280 mm (11,02 in)
Rear mount baffle cutout Ø	280 mm (11,02 in)
Total depth	148.5 mm (5,85in)
Flange and gasket thickness	14 mm (0,55 in)
Net weight	4,7 kg (10,36 lb)
Shipping weight	5,2 kg (11,46 lb)
CardBoard Packaging dimensions	332 x 332 (13.07 x 13.07 in)




AVAILABLE
ALSO WITHOUT
HORN

FREQUENCY RESPONSE CURVE

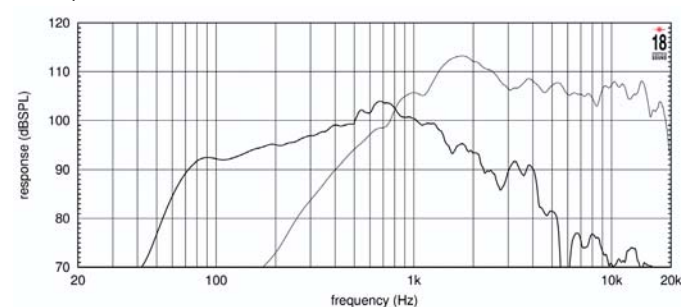

FREQUENCY RESPONSE MADE IN 50 LT. ENCLOSURE TUNED AT 60 Hz IN FREE FIELD (4n) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER, THE THIN LINE REPRESENTS HIGH FREQUENCY FREQUENCY RESPONSE

FREE AIR IMPEDANCE CURVE

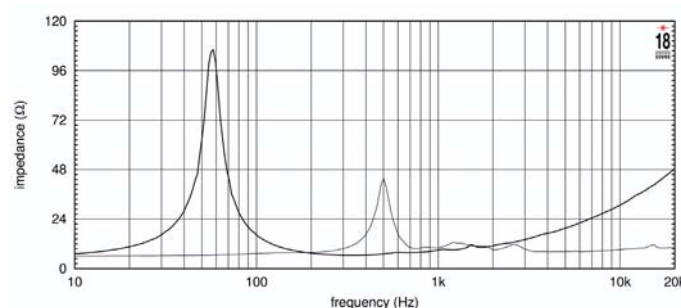

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 50 lit. enclosure tuned at 60 Hz using a 60-600 Hz band limited pink noise test signal applied for 2 hours and with 50% duty cycle. Power measured on minimum impedance
- (3) The peak power rating represent the maximum permitted instantaneous peak power level over a maximum period of 10 ms which will be withstood by the loudspeaker without damage.
- (4) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 3V sine wave test signal swept between 100 Hz and 500 Hz with the test specimen mounted in the same enclosure as given for 2 above.
- (5) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (6) Power compression represents the loss of sensitivity for the specified power, measured from 60 to 600Hz after a 5 min pink noise preconditioning test at the specified power.
- (7) Continuous Power is defined as a level that is 3 dB greater than the one measured with the new AES2-2012 standard, using continuous pink noise having 12 dB crest factor for 2 hours.
- (8) Program power is defined as 3 dB greater than continuous power rating.
- (9) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 3V sine wave test signal swept between 1000 Hz and 4000 Hz with the test specimen mounted in the same enclosure as given for 2 above.
- (10) Minimum crossover frequency require at least 12 dB/oct. slope high pass filter, preferred 24dB/oct. slope high pass filter LR
- (11) Thiele - Small parameters are measured after the test specimen has been conditioned by 1 hour 20 Hz sine and represent the expected long term parameters after a short period of use.
- (12) Linear Mat. Xmax is calculated as; $(Hvc \cdot Hg) / 2 + Hg / 4$ where Hvc is the coil depth and Hg is gap depth.

12CX800

High Output Coaxial Ferrite Transducer

97.5dB / 108dB SPL 1W/1m average sensitivity
 75 mm (3") LF Interleaved Sandwich Voice coil (ISV)
 400 W LF - 100 W HF AES power handling
 1.4" exit HF neodymium driver with high temperature ferrofluid
 75 mm (3") HF edgewound voice coil
 FEA optimized coupling horn profile
 70 degrees coverage angle
 Weather protected cone and plate for outdoor usage
 Ideal for compact reflex enclosures

LF GENERAL SPECIFICATIONS

Nominal Diameter	300 mm (8 in)
Rated Impedance	8 Ohm
AES Power (1)	400W
Program Power (2)	600W
Peak Power (3)	1200W
Sensitivity (4)	97.5 dB
Frequency Range (5)	60 ÷ 5500 Hz
Power Compression @-10dB (6)	0,8 dB
Power Compression @-3dB	2,5 dB
Power Compression @Full Power	3,2 dB
Max Recomm. Frequency	100 Hz
Recomm. Enclosure Volume	30 ÷ 60 lt. (1,1 ÷ 2,2 cuft)
Minimum Impedance	7 Ohm at 25°C
Max Peak To Peak Excursion	34 mm (1,3 in)
Voice Coil Diameter	75 mm (3,00 in)
Voice Coil Technology	Aluminum
Suspension	Triple Roll, Polycotton
Cone	Curvilinear, Paper

HF GENERAL SPECIFICATIONS

D.C. Resistance	6,2 Ohm
AES Power (7)	100W above 1,2 kHz
Program power (8)	200W above 1,2 kHz
Sensitivity (9)	108 dB
Frequency Range	0.5 ÷ 20 kHz
Recomm. Xover Frequency	1,2 kHz 12 dB/oct
Voice Coil Diameter	74,6 mm (3 in)

THIELE SMALL PARAMETERS (10)


Fs	53 Hz
Re	5,8 Ohm
Sd	0,053 sq.mt. (82,2 sq.in.)
Qms	4
Qes	0,27
Qts	0,25
Vas	73 lt. (2,6 cuft)
Mms	48 gr. (106,0 lb)
BL	18,5 Tm
Linear Mathematical Xmax (11)	± 6,25 mm (± 0,25 in)
le (1kHz)	1,3 mH
Ref. Efficiency 1W@1m (half space)	4% (99 dB)

MOUNTING INFORMATION


Overall diameter	315 mm (12,4 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7.15 mm (0,28 in)
Bolt circle diameter	296 - 300 mm (11,65 - 11,8 in)
Front mount baffle cutout Ø	282 mm (11,1 in)
Rear mount baffle cutout Ø	282 mm (11,1 in)
Total depth	209 mm (8,2 in)
Flange and gasket thickness	17 mm (0,7 in)
Net weight	11,4 kg (25,2 lb)
Shipping weight	12 kg (26,5 lb)
CardBoard Packaging dimensions	313x313x225 mm (12,3x12,3x8.9 in)



FREQUENCY RESPONSE CURVE

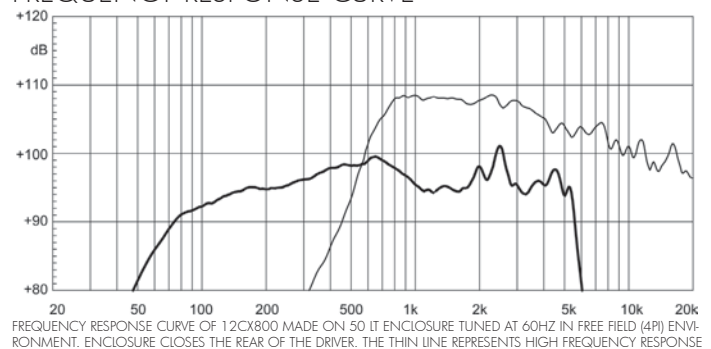

FREE AIR IMPEDANCE MAGNITUDE CURVE

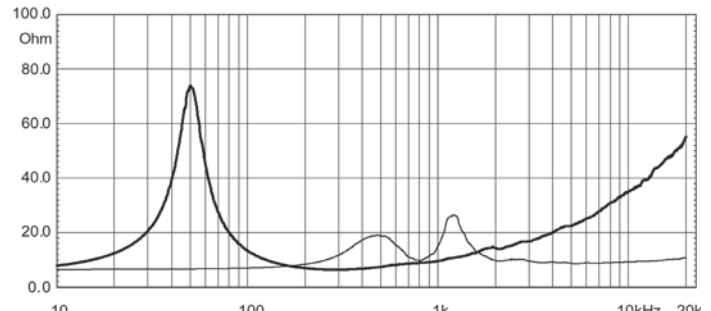

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 50 lit enclosure tuned 60Hz using a 40 - 400Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) The peak power rating represents the maximum permitted instantaneous peak power level over a maximum period of 10ms which will be withstood by the loudspeaker without damage.
- (4) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83 V sine wave test signal swept between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (5) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in 1/2 space environment.
- (6) Power compression represents the loss of sensitivity for the specified power, measured from 50-500 Hz, after a 5 min pink noise preconditioning test at the specified power.
- (7) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration. Power calculated on minimum impedance.
- (8) Program power is defined as 3 dB greater than AES power rating, and is a conservative expression of the transducer ability to handle music program material.
- (9) Sensitivity is measured on 1W input on rated impedance at 1m on axis from the mouth of the woofer and averaged in 3kHz band.
- (10) Thiele - Small parameters are measured after test specimen has been conditioned by AES power and represent the expected long term parameters after a short period of use.
- (11) Math. Xmax is calculated as $(Hvc+Hg)/2 + Hg/4$. Hvc is the coil depth and Hg is the gap depth.



10CX650

NEW

Coaxial Transducer Single Magnet

93.5 dB LF/106 dB HF SPL 1W/1m average sensitivity
 Single magnet motor
 400W LF - 140W HF maximum program power handling
 65 mm (2.5") Interleaved Sandwich LF Voice coil (ISV)
 44 mm (1.75") HF PEN diaphragm
 Proprietary Phase Plug design
 HF copper sleeve for reduced distortion and higher output
 90 degrees nominal conical dispersion
 Atmos™ ready
 Extended LF design
 Suitable for very compact enclosures and stage monitors

LF GENERAL SPECIFICATIONS

Nominal Diameter	260 mm (10 in)
Rated Impedance	8 Ohm
AES Power (1)	200W
Program Power (2)	400W
Peak Power (3)	800W
Sensitivity (4)	93.5 dB
Frequency Range (5)	55 ÷ 6200 Hz
Max Recomm. Frequency	1500 Hz
Recomm. Enclosure Volume	25 ÷ 45 lt. (0.88 ÷ 1.59 cu.ft)
Minimum Impedance	6 Ohm at 25°C
Max Peak To Peak Excursion	25 mm (0.98 in)
Voice Coil Diameter	65 mm (2.56 in)
Voice Coil Winding material	Edgewound copper
Suspension	Double roll, Polycotton
Cone	Curvilinear composite

HF GENERAL SPECIFICATIONS

D.C. Resistance	5,2 Ohm
AES Power (7)	70W above 1,2 kHz
Program power (8)	140W above 1,2 kHz
Sensitivity (9)	106 dB
Frequency Range	0.8 ÷ 16.1 kHz
Recomm. Xover Frequency (10)	1.2 kHz 12 dB/oct
Diaphragm material	Pet
Voice Coil Diameter	44 mm
Voice Coil Winding Material	Edge-wound aluminum
Magnet material	Ferrite

THIELE SMALL PARAMETERS (11)


Fs	88 Hz
Re	4.9 Ohm
Sd	0.0346 sq.m (53.63 sq.in)
Qms	3.99
Qes	0,33
Qts	0,30
Vas	32.8 lt. (1.16 cu.ft)
Mms	39.0 gr. (0.09 lb)
BL	14 Tm
Linear Mathematical Xmax (12)	±5.75 mm (±0.23 in)
Le (1 kHz)	0.94 mH
Ref. Efficiency 1W@1m (half space)	1.8 %

MOUNTING INFORMATION

Overall diameter	260 mm (10.24 in)
N. of mounting holes and bolt	8
Mounting holes diameter	6.1 mm (0.24 in)
Bolt circle diameter	243.5 ÷ 246.5 mm (9.59 ÷ 9.70 in)
Front mount baffle cutout Ø	230 mm (9.06 in)
Rear mount baffle cutout Ø	231 mm (9.09 in)
Total depth	155 mm (6.10 in)
Flange and gasket thickness	9.8 mm (0.39 in)
Net weight	6 kg (13.23 lb)
Shipping weight	6.5 kg (14.33 lb)
CardBoard Packaging dimensions	275x275x195 mm (10.83x10.83x7.68 in)




FREQUENCY RESPONSE CURVE

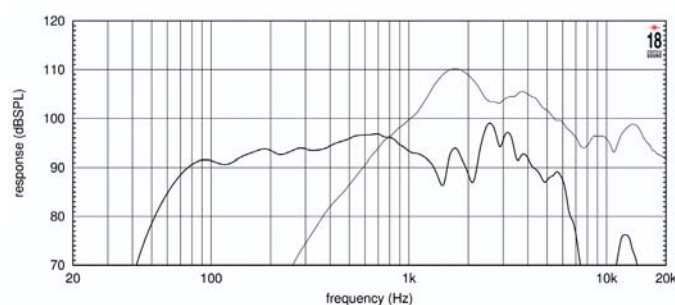

FREQUENCY RESPONSE MADE IN 25 LT. ENCLOSURE TUNED AT 65 Hz IN FREE FIELD (4n) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER, THE THIN LINE REPRESENTS HIGH FREQUENCY FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

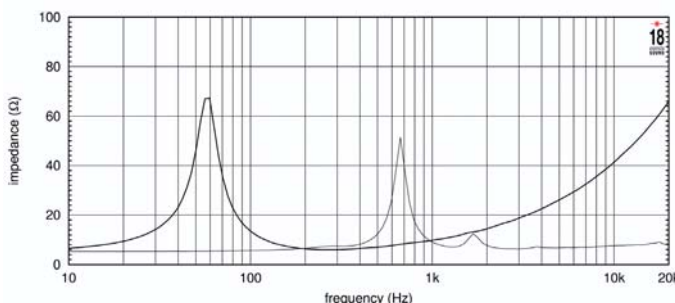

NOTES

- 1) AES power is determined according to AES2-1984 (r2003) standard
- 2) Program power rating is measured in 25 lit. enclosure tuned at 65 Hz using a 70-700 Hz band limited pink noise test signal applied for 2 hours and with 50% duty cycle. Power measured on minimum impedance
- (3) The peak power rating represent the maximum permitted instantaneous peak power level over a maximum period of 10 ms which will be withstood by the loudspeaker without damage.
- (4) Sensitivity represents the averaged value of acoustic output 1/3rd octave smoothed as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2.83V sine wave test signal swept between 100 Hz and 1000 Hz with the test specimen mounted in the same enclosure as given for 2 above.
- (5) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (6) Power compression represents the loss of sensitivity for the specified power, measured from 70 to 700Hz after a 5 min pink noise preconditioning test at the specified power.
- (7) Continuous Power is defined as a level that is 3 dB greater than the one measured with the new AES2-2012 standard, using continuous pink noise having 12 dB crest factor for 2 hours.
- (8) Program power is defined as 3 dB greater than continuous power rating.
- 9) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2.83V sine wave test signal swept between 1000 Hz and 4000 Hz with the test specimen mounted in the same enclosure as given for 2 above.
- (10) Minimum crossover frequency require at least 12 dB/oct. slope high pass filter, preferred 24dB/oct. slope high pass filter LR
- (11) Thiele - Small parameters are measured after the test specimen has been conditioned by 1 hour 20 Hz sine and represent the expected long term parameters after a short period of use.
- (12) Linear Mat. Xmax is calculated as; $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is gap depth.

8CX650

NEW



Coaxial Transducer Single Magnet

92.5 dB LF/105.5 dB HF SPL 1W/1m average sensitivity
 Single magnet motor
 400W LF - 140W HF maximum program power handling
 65 mm (2.5") Interleaved Sandwich LF Voice coil (ISV)
 44 mm (1.75") HF PEN diaphragm
 Proprietary Phase Plug design
 HF copper sleeve for reduced distortion and higher output
 90 degrees nominal conical dispersion
 Atmos™ ready
 Extended LF design
 Suitable for very compact enclosures and stage monitors

LF GENERAL SPECIFICATIONS

Nominal Diameter	200 mm (8 in)
Rated Impedance	8 Ohm
AES Power (1)	200W
Program Power (2)	400W
Peak Power (3)	800W
Sensitivity (4)	92.5 dB
Frequency Range (5)	55 ÷ 5500 Hz
Max Recomm. Frequency	1800 Hz
Recomm. Enclosure Volume	15 ÷ 35 lt. (0.53 ÷ 1.24 cu.ft)
Minimum Impedance	5.8 Ohm at 25°C
Max Peak To Peak Excursion	25 mm (0.98 in)
Voice Coil Diameter	65 mm (2.56 in)
Voice Coil Winding material	Edgewound CCAW
Suspension	Triple roll, Polycotton
Cone	Straight, water repellent composite

HF GENERAL SPECIFICATIONS

D.C. Resistance	5,24 Ohm
AES Power (7)	70W above 1,2 kHz
Program power (8)	140W above 1,2 kHz
Sensitivity (9)	105.4 dB
Frequency Range	0.94 ÷ 15 kHz
Recomm. Xover Frequency (10)	1.5 KHz
Diaphragm material	Pet
Voice Coil Diameter	44 mm
Voice Coil Winding Material	Edge-wound aluminum
Magnet material	Ferrite

THIELE SMALL PARAMETERS (11)


Fs	72 Hz
Re	4.9 Ohm
Sd	0.0227 sq.m (35.19 sq.in)
Qms	4.12
Qes	0,37
Qts	0,34
Vas	14.5 lt. (0.51 cu.ft)
Mms	24.0 gr. (0.05 lb)
BL	12 Tm
Linear Mathematical Xmax (12)	±5.75 mm (±0.23 in)
Le (1 kHz)	0.65 mH
Ref. Efficiency 1W@1m (half space)	1.4 %

MOUNTING INFORMATION

Overall diameter	210 mm (8.27 in)
N. of mounting holes and bolt	6
Mounting holes diameter	6.1 mm (0.24 in)
Bolt circle diameter	195 ÷ 198 mm (7.68 ÷ 7.80 in)
Front mount baffle cutout Ø	185 mm (7.28 in)
Rear mount baffle cutout Ø	185.5 mm (7.30 in)
Total depth	132 mm (5.20 in)
Flange and gasket thickness	8.8 mm (0.35 in)
Net weight	5.5 kg (12.13 lb)
Shipping weight	6 kg (13.23 lb)
CardBoard Packaging dimensions	235x235x165 mm (9.25x9.25x6.50 in)




FREQUENCY RESPONSE CURVE

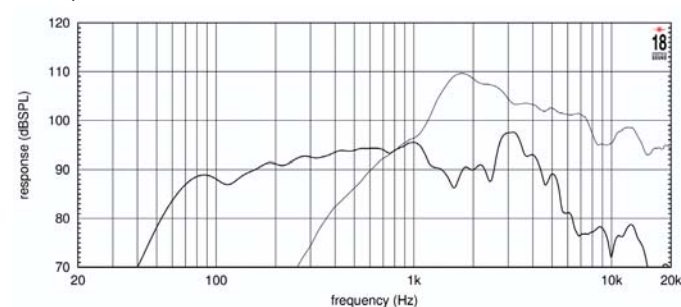

FREQUENCY RESPONSE MADE IN 25 LT. ENCLOSURE TUNED AT 65 Hz IN FREE FIELD (4n) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER, THE THIN LINE REPRESENTS HIGH FREQUENCY FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

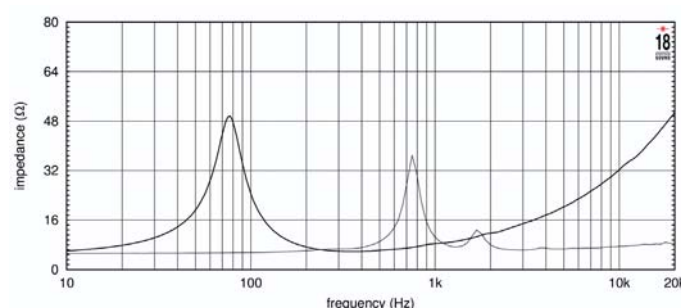

NOTES

- 1) AES power is determined according to AES2-1984 (r2003) standard
- 2) Program power rating is measured in 25 lit. enclosure tuned at 65 Hz using a 70-700 Hz band limited pink noise test signal applied for 2 hours and with 50% duty cycle. Power measured on minimum impedance
- (3) The peak power rating represent the maximum permitted instantaneous peak power level over a maximum period of 10 ms which will be withstood by the loudspeaker without damage.
- (4) Sensitivity represents the averaged value of acoustic output 1/3rd octave smoothed as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2.83V sine wave test signal swept between 100 Hz and 1000 Hz with the test specimen mounted in the same enclosure as given for 2 above.
- (5) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (6) Power compression represents the loss of sensitivity for the specified power, measured from 70 to 700Hz after a 5 min pink noise preconditioning test at the specified power.
- (7) Continuous Power is defined as a level that is 3 dB greater than the one measured with the new AES2-2012 standard, using continuous pink noise having 12 dB crest factor for 2 hours.
- (8) Program power is defined as 3 dB greater than continuous power rating.
- (9) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2.83V sine wave test signal swept between 1000 Hz and 4000 Hz with the test specimen mounted in the same enclosure as given for 2 above.
- (10) Minimum crossover frequency require at least 12 dB/oct. slope high pass filter, preferred 24dB/oct. slope high pass filter LR
- (11) Thiele - Small parameters are measured after the test specimen has been conditioned by 1 hour 20 Hz sine and represent the expected long term parameters after a short period of use.
- (12) Linear Mat. Xmax is calculated as; $(HvcHg)/2 + Hg/4$ where Hvc is the coil depth and Hg is gap depth.



8CX400F

High Output Coaxial Ferrite Transducer

95dB SPL 1W / 1m average sensitivity
280W LF - 50W HF power handling
51 mm (2 inches) LF Interleaved Sandwich Voice coil (ISV)
25,4mm (1 inch) HF driver edgewound voice coil
90 degrees coverage pattern
Ideal for compact reflex applications

LF GENERAL SPECIFICATIONS

Nominal Diameter	200 mm (8 in)
Rated Impedance	8 Ohm
AES Power (1)	280 W
Program Power (2)	400W
Peak Power (3)	800W
Sensitivity (4)	95 dB
Frequency Range (5)	65 ÷ 6100 Hz
Power Compression @10dB (6)	0,5 dB
Power Compression @3dB	1,4 dB
Power Compression @Full Power	2,3 dB
Max Recomm. Frequency	2800 Hz
Recomm. Enclosure Volume	10 ÷ 40 lt. (0,35 ÷ 1,41 cuft)
Minimum Impedance	6,1 Ohm at 25°C
Max Peak To Peak Excursion	19 mm (0,75 in)
Voice Coil Diameter	51 mm (2 in)
Voice Coil Technology	Aluminum
Suspension	M-roll, Polycotton
Cone	Curvilinear, Paper

HF GENERAL SPECIFICATIONS

D.C. Resistance	8,3 Ohm
AES Power (7)	25 W above 2,5 kHz
Program power (8)	50 W above 2,5 kHz
Sensitivity (9)	106 dB
Frequency Range	2,5 kHz ÷ 20 kHz
Recomm. Xover Frequency	3 kHz 12 dB/oct
Voice Coil Diameter	25,4 mm (1,0 in)

THIELE SMALL PARAMETERS (10)


Fs	64 Hz
Re	5 Ohm
Sd	0,0227 sq.mt. (35,2 sq.in.)
Qms	3,23
Qes	0,43
Qts	0,38
Vas	23,9 lt. (0,85 cuft)
Mms	18 gr. (0,04 lb)
BL	9,3 Tm
Linear Mathematical Xmax (11)	± 5,8 mm (± 0,23 in)
Le (1kHz)	0,96 mH
Ref. Efficiency 1W@1m (half space)	93,7 dB

MOUNTING INFORMATION

Overall diameter	210 mm (8,27 in)
N. of mounting holes and bolt	6
Mounting holes diameter	6,25 mm (0,25 in)
Bolt circle diameter	195 - 198 mm (7,68 - 7,80 in)
Front mount baffle cutout Ø	186 mm (7,32 in)
Rear mount baffle cutout Ø	184 mm (7,24 in)
Total depth	150,5 mm (5,93 in)
Flange and gasket thickness	14,5 mm (0,57 in)
Net weight	4,4 kg (9,76 lb)
Shipping weight	5,0 kg (11,1 lb)
CardBoard Packaging dimensions	235x235x165 mm (9,25x9,25x6,46 in)




FREQUENCY RESPONSE CURVE

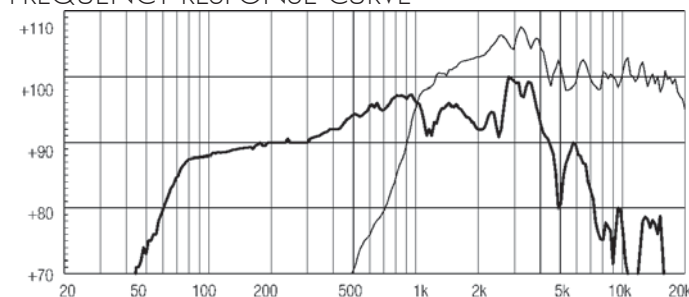

FREQUENCY RESPONSE CURVE OF 8CX400 MADE ON 25lit ENCLOSURE TUNED AT 65Hz IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS HIGH FREQUENCY RESPONSE.

FREE AIR IMPEDANCE MAGNITUDE CURVE

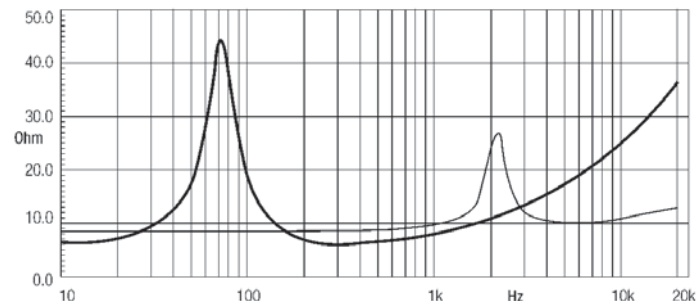

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Program power rating is measured in 25lit enclosure tuned 65Hz using a 60 - 2000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) The peak power rating represents the maximum permitted instantaneous peak power level over a maximum period of 10ms which will be withstood by the loudspeaker without damage.
- (4) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83 V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (5) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in 1/2 space environment.
- (6) Power compression represents the loss of sensitivity for the specified power, measured from 50-500 Hz, after a 5 min pink noise preconditioning test at the specified power.
- (7) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration. Power calculated on minimum impedance.
- (8) Program power is defined as 3 dB greater than AES power rating, and is a conservative expression of the transducer ability to handle music program material.
- (9) Sensitivity is measured on 1W input on rated impedance at 1m on axis from the mouth of the transducer and averaged in 3kHz band.
- (10) Thiele - Small parameters are measured after the test specimen has been conditioned by 280 W AES power and represent the expected long term parameters after a short period of use.
- (11) Linear Mat. Xmax is calculated as $(HvcHg)/2 + Hg/4$. Hvc is the coil depth and Hg is gap depth.



HORNS



HXR2064

Constant Coverage HF Horn

2 inch throat entry
 Aluminum construction for excellent heat transfer
 Uniform on-axis and off-axis frequency response
 60° x 40° horizontal and vertical constant coverage
 Very low distortion at high sound pressure
 Improved compression driver cooling
 Rotatable structure

GENERAL SPECIFICATIONS

Throat Diameter	50 mm (2 in)
Horizontal Coverage (-6dB)	60° (10 - -6) average range (1,6kHz - 12,5kHz)
Vertical Coverage (-6 dB)	40° (30 - 0) average range (1,6kHz - 12,5kHz)
Directivity Index	11 dB (1.8 - - 2.6) average range (1,6kHz - 12,5kHz)
Usable Frequency Range	Above 800 Hz
Recomm. Cross.Frequency	800 Hz or more
Sensitivity (1)	110 dB
Frequency Range	800 Hz - 18kHz
Material	Low pressure injected aluminum

MOUNTING INFORMATION


Mouth Height	270 mm (10,6 in)
Mouth Width	270 mm (10,6 in)
Depth	200 mm (7,9 in)
Mouth Mounting Dimensions	8 Ø 6 holes
Net weight	2 Kg (4,4 lb)




NOTES

1) Sensitivity is measured at 1W input on ND2080 rated impedance at 1m on axis from the mouth of the horn, averaged between 1kHz and 4 kHz.

HORIZONTAL BEAMWIDTH - RED PLOT - VERTICAL BEAMWIDTH - BLUE PLOT - A

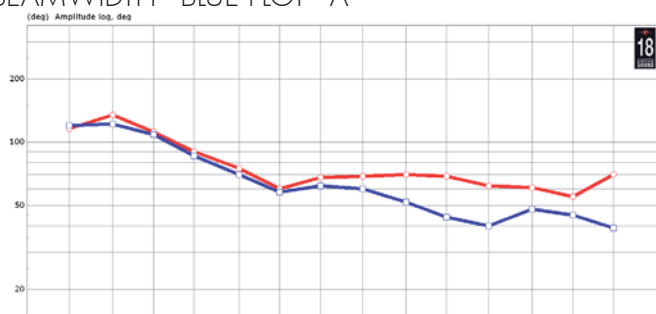


DIRECTIVITY INDEX - B

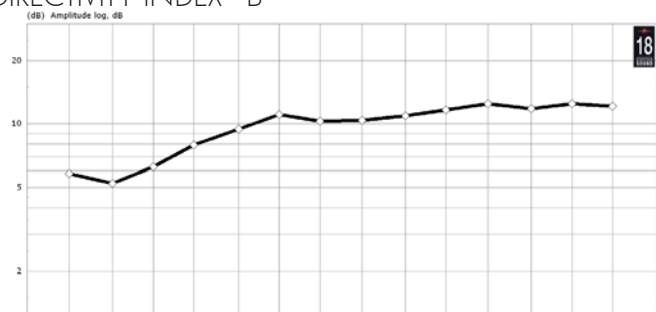

HORIZONTAL POLAR DIRECTIVITY MAP - C



VERTICAL POLAR DIRECTIVITY MAP - D

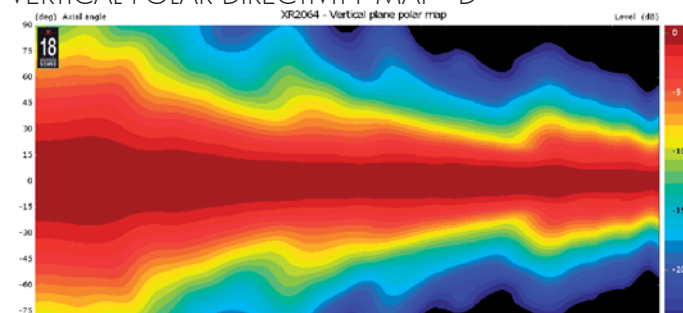

XR1496

Constant Coverage HF Horn

1.4 throat inch entry
 Aluminum construction for excellent heat transfer
 Uniform on-axis and off-axis frequency response
 90° x 60° horizontal and vertical constant coverage
 Very low distortion at high sound pressure
 Improved compression driver cooling
 Rotatable structure

GENERAL SPECIFICATIONS

Throat Diameter	35,5 mm (1,4 in)
Horizontal Coverage (-6dB)	90° (15° - 10°) average range (1,25kHz - 12,5kHz)
Vertical Coverage (-6 dB)	60° (18° - 12°) average range (1,25kHz - 12,5kHz)
Directivity Index	9dB (1,8 - 1,2) average range (1,25kHz - 12,5kHz)
Usable Frequency Range	Above 800 Hz
Recomm. Cross.Frequency	800 Hz or more
Sensitivity (1)	110 dB
Frequency Range	800 Hz - 18kHz
Material	low pressure injected aluminum

MOUNTING INFORMATION


Mouth Height	270 mm (10,6 in)
Mouth Width	270 mm (10,6 in)
Depth	180 mm (7,1 in)
Mouth Mounting Dimensions	8 Ø 6 holes
Net weight	1,9 Kg (4 lb)




NOTES

1) Sensitivity is measured at 1W input on ND2080 rated impedance at 1m on axis from the mouth of the horn, averaged between 1kHz and 4 kHz.


HORIZONTAL BEAMWIDTH - RED PLOT - VERTICAL BEAMWIDTH - BLUE PLOT - A

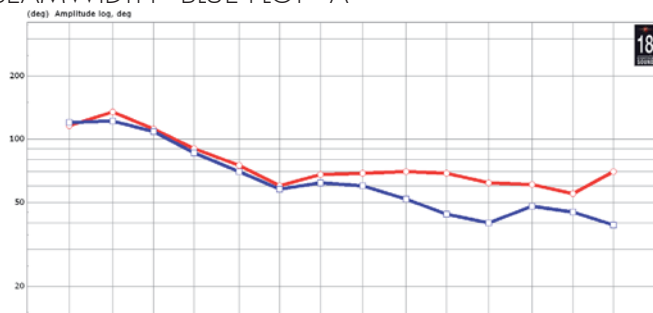


DIRECTIVITY INDEX - B

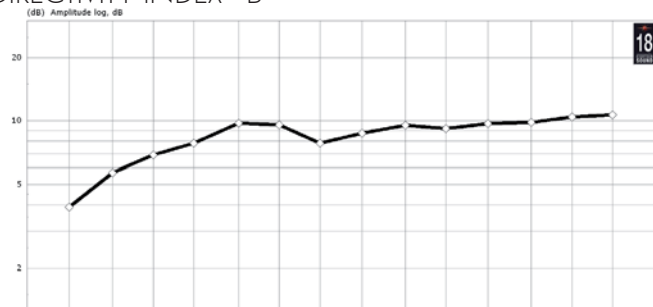

HORIZONTAL POLAR DIRECTIVITY MAP - C

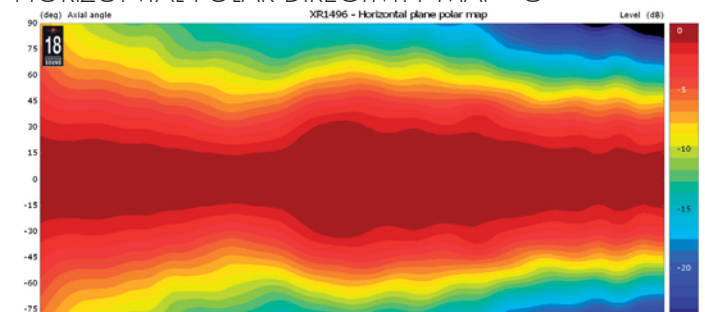

VERTICAL POLAR DIRECTIVITY MAP - D

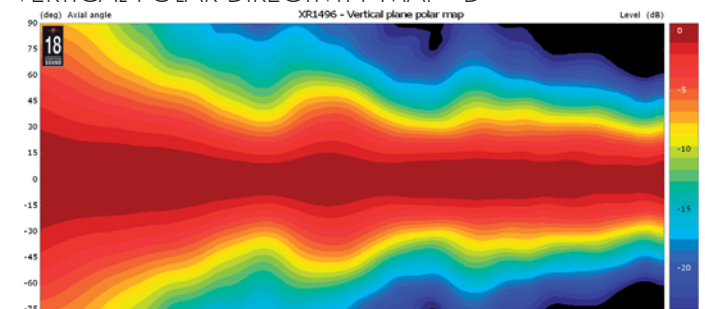

HXR1464

Constant Coverage HF Horn

1.4 inch throat entry
 Aluminium construction for excellent heat transfer
 Uniform on-axis and off-axis frequency response
 60° x 40° horizontal and vertical constant coverage
 Very low distortion at high sound pressure
 Improved compression driver cooling
 Rotatable structure

GENERAL SPECIFICATIONS

Throat Diameter	35,5 mm (1,4 in)
Horizontal Coverage (-6dB)	60° (10 - 2) average range (1,25kHz - 12,5kHz)
Vertical Coverage (-6 dB)	40° (25 - 0) average range (1,25kHz - 12,5kHz)
Directivity Index	11 dB (2 - 1) average range (1,25kHz - 12,5kHz)
Usable Frequency Range	Above 800 Hz
Recomm. Cross.Frequency	800 Hz or more
Sensitivity (1)	110 dB
Frequency Range	800 Hz - 18kHz
Material	Low pressure injected aluminum

MOUNTING INFORMATION


Mouth Height	270 mm (10,6 in)
Mouth Width	270 mm (10,6 in)
Depth	180 mm (7,1 in)
Mouth Mounting Dimensions	8 Ø 6 holes
Net weight	1,9 Kg (4 lb)




NOTES

1) Sensitivity is measured at 1W input on ND2080 rated impedance at 1m on axis from the mouth of the horn, averaged between 1kHz and 4 kHz.


HORIZONTAL BEAMWIDTH - RED PLOT - VERTICAL BEAMWIDTH - BLUE PLOT - A

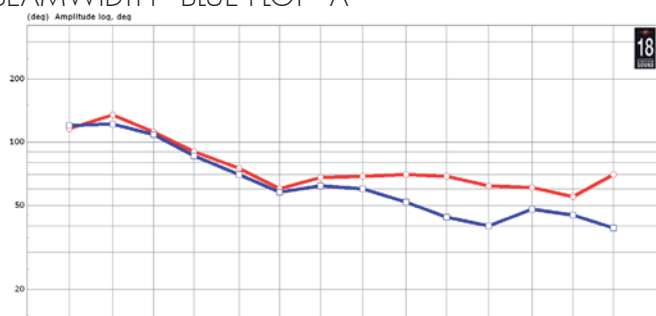


DIRECTIVITY INDEX - B

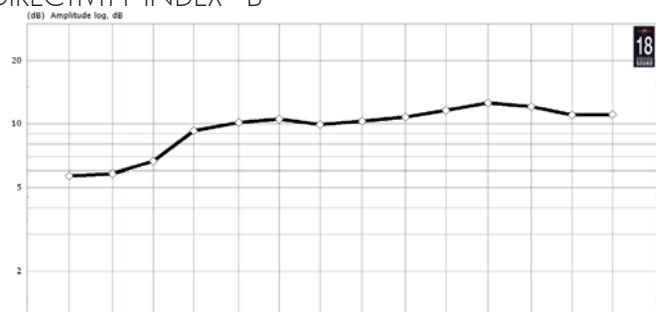

HORIZONTAL POLAR DIRECTIVITY MAP - C

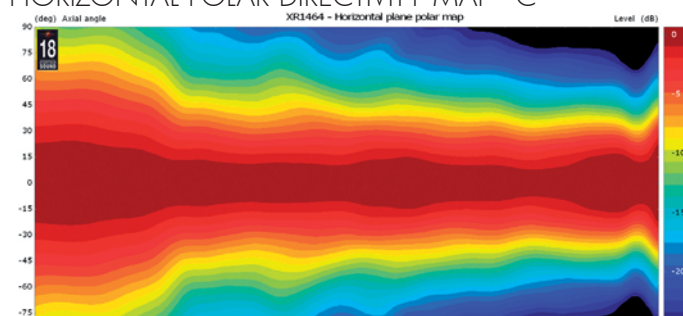

VERTICAL POLAR DIRECTIVITY MAP - D

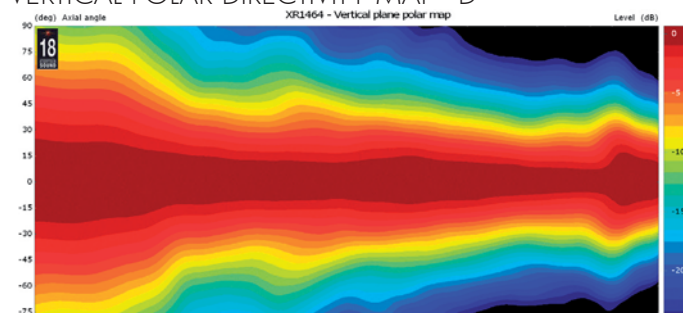

XR1064

Constant Coverage HF Horn

1 inch throat entry

Aluminum construction for excellent heat transfer

Uniform on-axis and off-axis frequency response

60° x 40° horizontal and vertical constant coverage

Very low distortion at high sound pressure

Rotatable structure

GENERAL SPECIFICATIONS

Throat Diameter	25,4 mm (1 in)
Horizontal Coverage (-6dB)	60° (20° - 10°) average range (1,6kHz - 12,5kHz)
Vertical Coverage (-6 dB)	40° (40° - 0°) average range (1,6kHz - 12,5kHz)
Directivity Index	11 dB (1.8 - 2,6) average range (1,6kHz - 12,5kHz)
Usable Frequency Range	Above 800 Hz
Recomm. Cross.Frequency	1200 Hz or more
Sensitivity(1)	110 dB
Frequency Range	800 Hz - 18kHz
Material	low pressure injected aluminum

MOUNTING INFORMATION


Mouth Height	210 mm (8,3 in)
Mouth Width	210 mm (8,3 in)
Depth	110 mm (4,3 in)
Mouth Mounting Dimensions	8 Ø 6 holes
Driver mounting specs	3 M5 holes on Ø 57mm (2.24in) - 4 M6 holes on Ø 76mm (3in)




NOTES

1) Sensitivity is measured at 1W input on ND2080 rated impedance at 1m on axis from the mouth of the horn, averaged between 1kHz and 4 kHz.

HORIZONTAL BEAMWIDTH - RED PLOT - VERTICAL BEAMWIDTH - BLUE PLOT - A

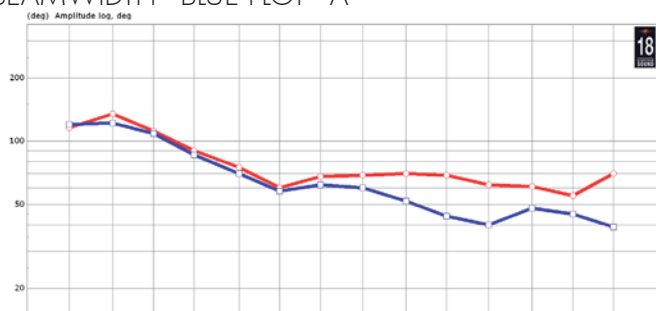


DIRECTIVITY INDEX - B

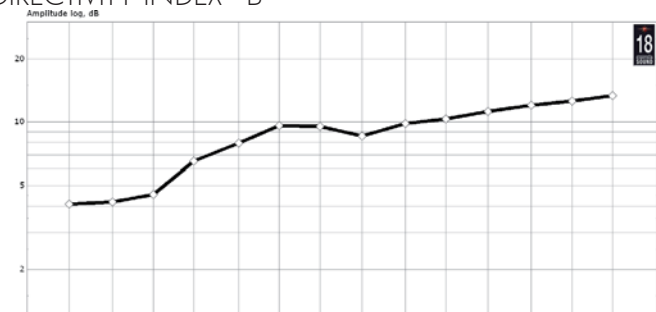

HORIZONTAL POLAR DIRECTIVITY MAP - C



VERTICAL POLAR DIRECTIVITY MAP - D

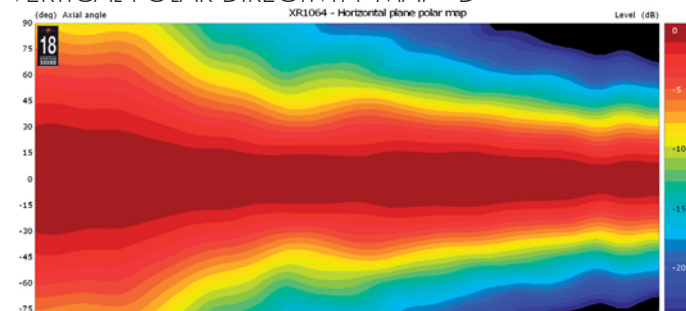

H XT1464

Constant Coverage HF Horn

1.4 inch throat entry
 Unique Eighteen Sound elliptical shape (ESS)
 Injection moulded polyurethane construction
 Uniform on-axis and off-axis frequency response
 60° x 50° horizontal and vertical constant coverage
 Very low distortion at high sound pressure levels

GENERAL SPECIFICATIONS

Throat Diameter	35,5 mm (1,4 in)
Horizontal Coverage (-6dB)	60° (8 - -12) average range (1,25KHz - 12,5KHz)
Vertical Coverage (-6 dB)	50° (15 - -10) average range (1,25KHz - 12,5KHz)
Directivity Index	18 dB (1,8 - 2,6) average range (1,25KHz - 12,5KHz)
Usable Frequency Range	Above 500 Hz
Recomm. Cross.Frequency	800 Hz or more
Sensitivity (1)	110 dB
Frequency Range	800 Hz - 18KHz
Material	Injection moulded polyurethane

MOUNTING INFORMATION


Mouth Height	304 mm (12 in)
Mouth Width	380 mm (15in)
Depth	257 mm (10,1 in)
Mouth Mounting Dimensions	8 Ø6 holes
Net weight	1,3 Kg (2,87 lb)




NOTES

1) Sensitivity is measured at 1W input on ND2080 rated impedance at 1m on axis from the mouth of the horn, averaged between 1kHz and 4 kHz.


HORIZONTAL BEAMWIDTH - RED PLOT - VERTICAL BEAMWIDTH - BLUE PLOT - A

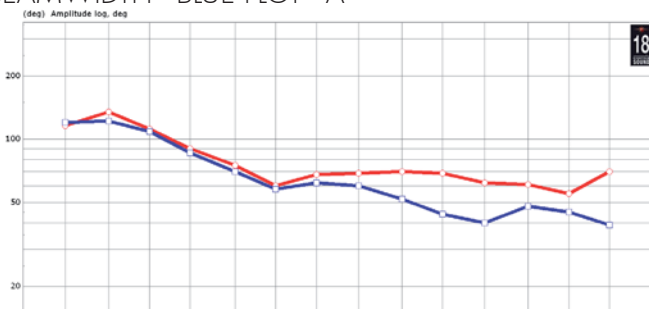


DIRECTIVITY INDEX - B

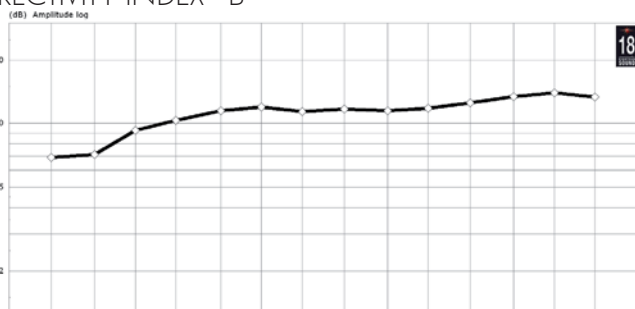

HORIZONTAL POLAR DIRECTIVITY MAP - C

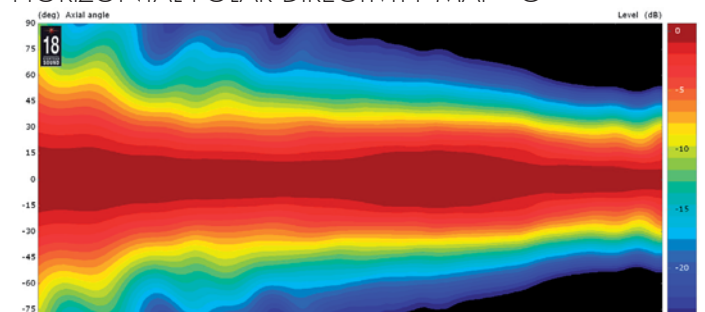

VERTICAL POLAR DIRECTIVITY MAP - D

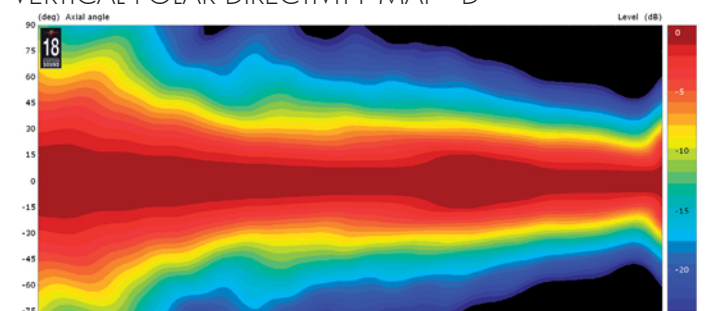

XT1086

Constant Coverage HF Horn

1 inch throat entry
 Unique Eighteen Sound elliptical shape (ESS)
 Flat front and compact size
 Die-cast aluminum construction for best heat transfer
 Uniform on-axis and off-axis frequency response
 80° x 60° horizontal and vertical constant coverage
 Improved structure strength by exclusive computer aided vibrational analysis

GENERAL SPECIFICATIONS

Throat Diameter	25,4 mm (1 in)
Horizontal Coverage (-6 dB)	80° (1 - -8) average range (1,6kHz - 12,5kHz) (1 in)
Vertical Coverage (-6 dB)	60° (18 - -7) average range (1,6kHz - 12,5kHz)
Directivity Index	10 dB (1.3 - -0,4) average range (1.6kHz - 12.5kHz)
Usable Frequency Range	Above 800 Hz
Recomm. Cross.Frequency	1200 Hz or more
Sensitivity (1)	110 dB
Frequency Range	1200 Hz - 20kHz
Material	Die-cast aluminum

MOUNTING INFORMATION


Mouth Height	215 mm (8,5 in)
Mouth Width	260 mm (10,2 in)
Depth	126 mm (5 in)
Mouth Mounting Specs	4 M6 holes on the edge of rectangle with 214 mm x 169 mm (8,43 x 6,65 in) sides
Driver mounting specs	3 M5 holes on Ø 57mm (2.24 in) - 4 M6 holes on Ø 76mm (3 in)




NOTES

1) Sensitivity is measured at 1W input on ND2080 rated impedance at 1m on axis from the mouth of the horn, averaged between 1kHz and 4 kHz.

HORIZONTAL BEAMWIDTH - RED PLOT - VERTICAL BEAMWIDTH - BLUE PLOT - A

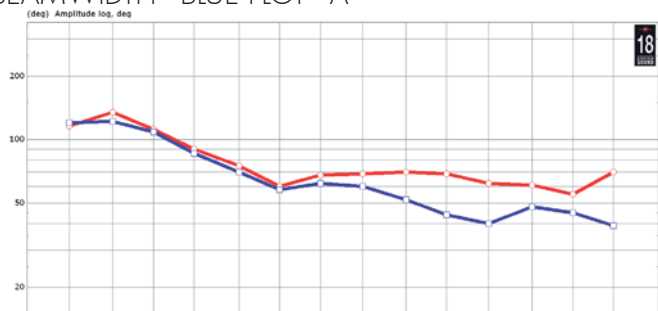


DIRECTIVITY INDEX - B

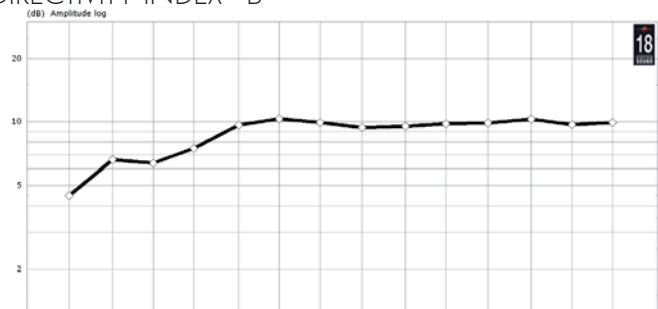

HORIZONTAL POLAR DIRECTIVITY MAP - C



VERTICAL POLAR DIRECTIVITY MAP - D

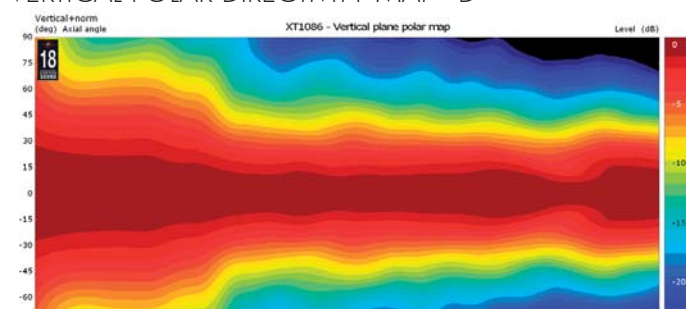

H XT120

Constant Coverage HF Horn

1 inch entry
 Unique Eighteen Sound elliptical shape (ESS)
 Flat front and compact size
 Injection moulded polyurethane construction
 Uniform on-axis and off-axis frequency response
 90° x 60° horizontal and vertical constant coverage

GENERAL SPECIFICATIONS

Throat Diameter	25,4 mm (1 in)
Horizontal Coverage (-6dB)	90° (1 - -10) average range (2kHz - 12,5kHz)
Vertical Coverage (-6 dB)	60° (15 - -10) average range (2kHz - 12,5kHz)
Directivity Index	15 dB (2,5 - 1,5)
Usable Frequency Range	Above 1.5 kHz
Recomm. Cross.Frequency	2 kHz or more
Sensitivity (1)	108 dB
Frequency Range	2kHz - 18kHz
Material	Injection moulded Polyurethane

MOUNTING INFORMATION


Mouth Height	150 mm (5,9 in)
Mouth Width	200 mm (7,8 in)
Depth	103 mm (4,1 in)
Mouth Mounting Specs	4 6 mm Ø holes on the edge of rectangle with 165 mm x 115 mm (6,5 x 4,53 in) sides
Driver mounting specs	3 5.25 mm Ø holes on Ø 57 mm (2.24 in) - 4 6.25mm Ø holes on Ø 76mm (3in)



NOTES


1) Sensitivity is measured at 1W input on ND2080 rated impedance at 1m on axis from the mouth of the horn, averaged between 1kHz and 4 kHz.

HORIZONTAL BEAMWIDTH - RED PLOT - VERTICAL BEAMWIDTH - BLUE PLOT - A

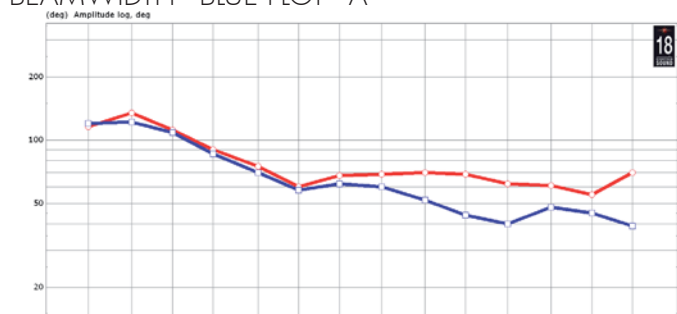


HORIZONTAL BEAMWIDTH - RED PLOT - A

DIRECTIVITY INDEX - B

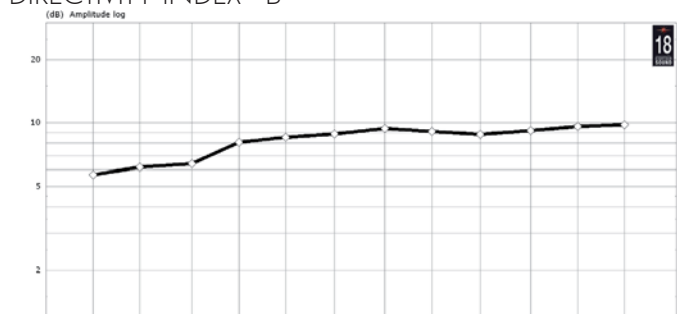


DIRECTIVITY INDEX - B

HORIZONTAL POLAR DIRECTIVITY MAP - C

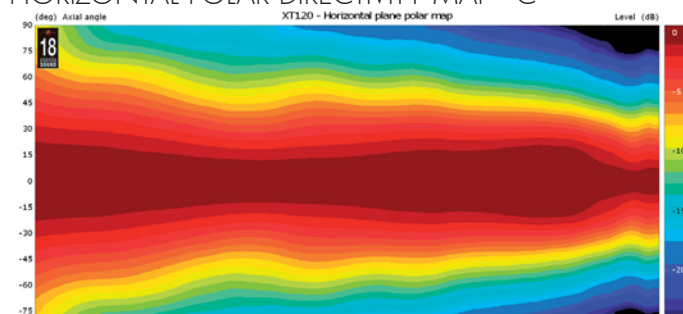

VERTICAL POLAR DIRECTIVITY MAP - D

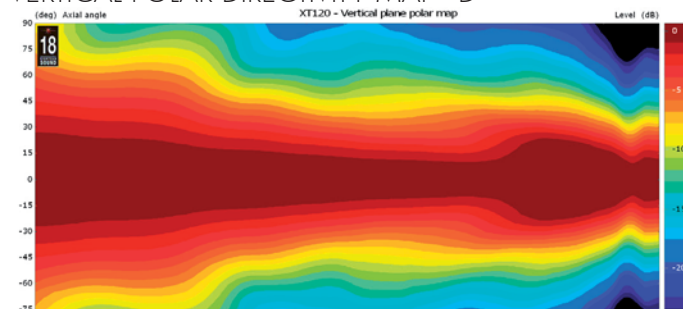



LINE ARRAY SOURCES



LA

XG14

Line Array Source

- 1.4" entry line-array source
- 10° vertical coverage angle
- Transmission line acoustical design minimizes internal reflections and acoustical losses
- Throat shape optimized for lowering air distortion
- Compact size for high arrayability
- Die-cast aluminum construction
- Offered in combination with ND1480A or NSD1424BTN compression drivers



GENERAL SPECIFICATIONS

Throat Diameter	35,5 mm (1,4 in)
Horizontal Coverage (-6dB)	100° nominal
Vertical Coverage (-6 dB)	10° nominal
Usable Frequency Range	Above 800 Hz
Sensitivity	111 dB
Frequency Range	500 Hz - 18KHz
Material (1)	Die-cast aluminum


MOUNTING INFORMATION

Flange Height	126 mm (5 in)
Mouth Width	133 mm (5.25 in)
Depth	215 mm (8.45 in)
Flange Mounting	4 screws Ø 6
Net weight	1 Kg (2.10 lb)
Gross weight	1,3 Kg (2.73 lb)

NOTES

1) Sensitivity is measured at 1W input on ND1480A rated impedance at 1m on axis from the mouth of the line array source, averaged between 1kHz and 4 kHz.

HORIZONTAL POLAR DIRECTIVITY MAP

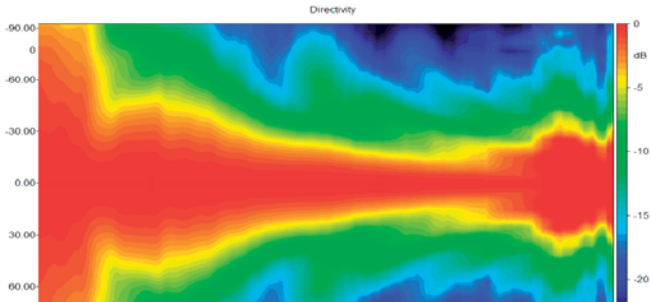

Line Array Source

- 1.0" entry line-array source
- 10° vertical coverage angle
- Transmission line acoustical design minimizes internal reflections and acoustical losses
- Throat shape optimized for lowering air distortion
- Compact size for high arrayability
- Die-cast aluminum construction

GENERAL SPECIFICATIONS

Throat Diameter	25,4 mm (1,0 in)
Horizontal Coverage (-6dB)	100° nominal
Vertical Coverage (-6 dB)	10° nominal
Usable Frequency Range	Above 1200 Hz
Sensitivity	111 dB
Frequency Range	1000 Hz - 18KHz
Material (1)	Die-cast aluminum

MOUNTING INFORMATION


Flange Height	101 mm (3.97 in)
Mouth Width	87 mm (3.42 in)
Depth	130 mm (5.11 in)
Flange Mounting	4 screws Ø M5
Gross weight	1,0 Kg (2.21 lb)
Net weight	0,4 kg (0.88 lb)



NOTES

1) Sensitivity is measured at 1W input on ND1085 rated impedance at 1mt on axis from the mouth of the line array source, averaged between 1kHz and 4 kHz.

HORIZONTAL POLAR DIRECTIVITY MAP

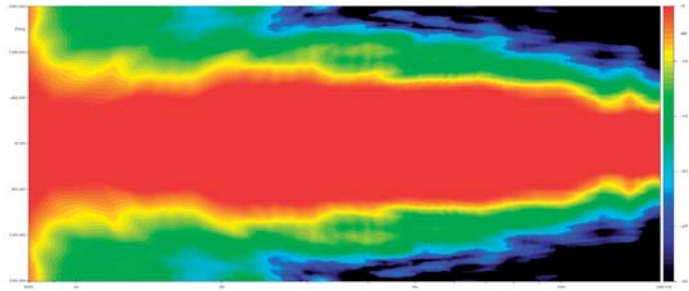





EIGHTEEN SOUND SRL

Via Botticelli 8
42124 Reggio Emilia
Italy
Ph. +39 0522 1861800
www.eighteensound.com

MADE IN ITALY